

ELD4RT1227

ELD4RT1230

ELD4RT1240

4" LED Insert Kit




PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

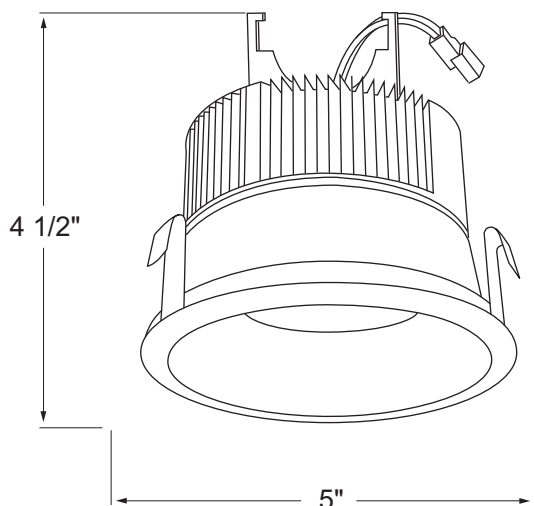

PRODUCT SPECIFICATIONS

- Suitable for use in fixtures installed in insulated ceilings
- Suitable for installation in tall and shallow cans
- Suitable for installation into a 4" recessed fixtures with 2-wire connector.
- Suitable for installation into a 4" recessed fixtures with medium base socket, using PSA30 adaptor (included)
- Housing meets restricted air flow requirement (per ASTM E-283).
- Meets ENERGY STAR requirements.
- Complete assembly to consist of HOUSING/INSERT/TRIM

Lamp: LED array chip CRI 90

ELD4RT1227: 12W 2700°K, 800 lm, beam angle 90°

ELD4RT1230: 12W 3000°K, 850 lm, beam angle 90°

ELD4RT1240: 12W 4000°K, 900 lm, beam angle 90°

LED Driver: 120V AC dimmable

Life-span: 50,000 hours

Warranty: 5 years limited

CATALOG NUMBER

Housings: EL490ICA
EL490RICA

Inserts: ELD4RT1227
ELD4RT1230
ELD4RT1240

Trims: EL4330B	EL4331B	EL4351B
EL4330BZ	EL4331BZ	EL4351BZ
EL4330C	EL4331C	EL4351C
EL4330CP	EL4331CP	EL4351CP
EL4330W	EL4331W	EL4351W