


Features

- *ExoCrylic™*
- *Oval shape*
- *Drop-in installation*
- *Molded lumbar support and armrests for comfort*
- *72" (1829 mm) x 42-1/8" (1070 mm) x 19-3/4" (502 mm)*

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *CSA B45.5/IAPMO Z124*

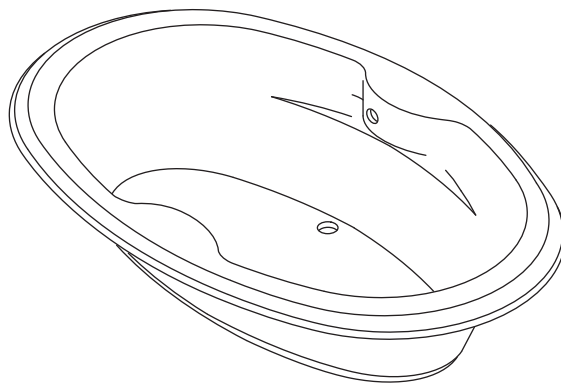

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- PB: Vibrant® Polished Brass

Specified Model

Model	Description	Colors/Finishes	
K-1149	Bath	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Recommended Accessories			
K-11677	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB

Product Specification

The ExoCrylic bath shall be 72" (1829 mm) in length, 42-1/8" (1070 mm) in width, and 19-3/4" (502 mm) in height. Bath shall be oval shaped and for drop-in installation. Bath shall feature molded lumbar support and armrests for comfort. Bath shall be Kohler Model K-1149-_____.

PROFLEX® 7242

Technical Information




Fixture*:	
Bathing well:	
Basin area, bottom	53" (1346 mm) x 26" (660 mm)
Basin area, top	65" (1651 mm) x 34" (864 mm)
To overflow:	
Water depth	15" (381 mm)
Capacity	78 gal (295.3 L)
Weight	60-1/2 lbs (27.4 kg)
* Approximate measurements for comparison only.	
Included components:	
Cutout template	114861-7

Installation Notes

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 35 lbs/square foot (171 kg/square meter) loading.

No change in measurements if connected with drain illustrated. (K-11677)

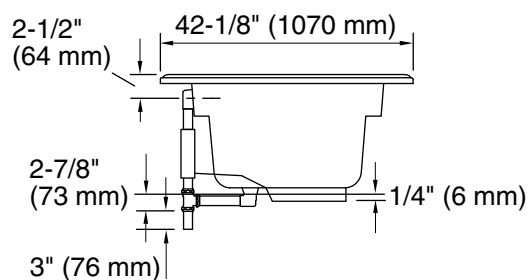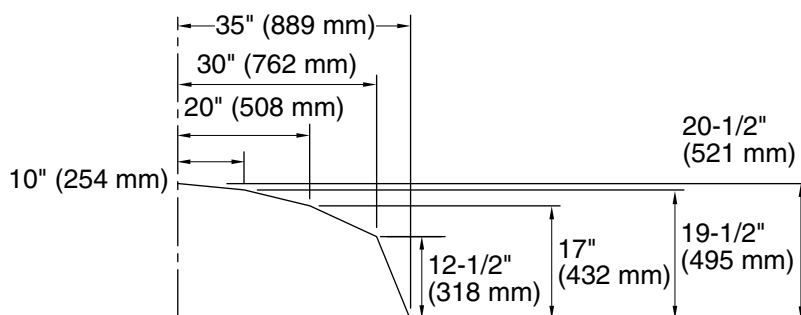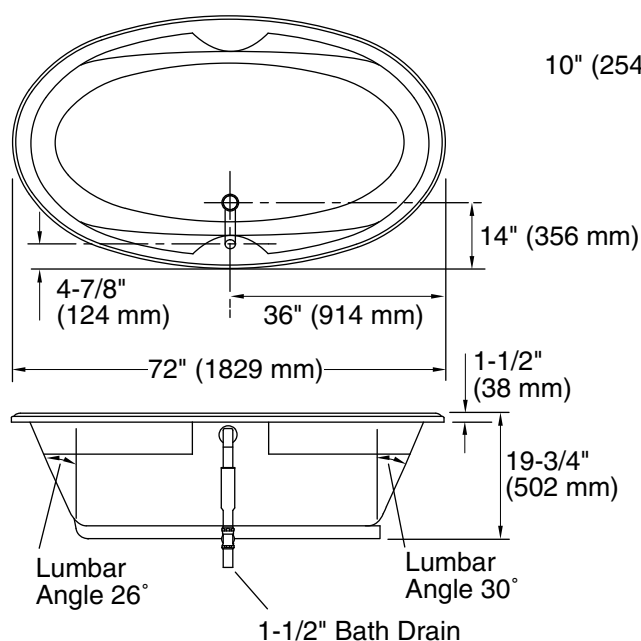

Product Diagram