


SMOOTH 5

FR-W2601-56L

56" Ceiling Fan

MODERN FORMS SMART FANS

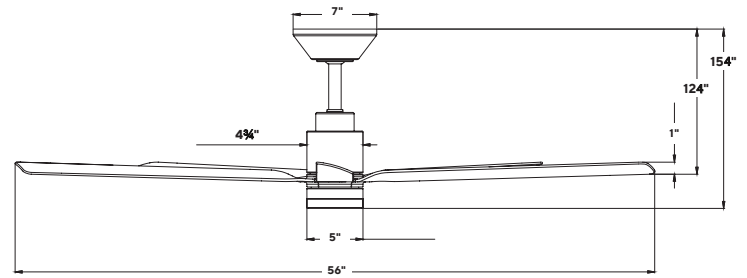

PRODUCT DESCRIPTION

The Smooth 5 ceiling fan combines minimalist design with modern functionality. Its sleek trio of blades features a gracefully curved detail where they connect to the housing, creating a seamless 56-inch sweep that exudes continuity and elegance. At the fan's center, an integrated LED light emits a warm glow through an opal lens, complementing its streamlined aesthetic. For non-illuminated use, an included cover provides a clean, finished look.

FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC Motor
- Includes BT remote control
- Optional wall control for 3, 4-way control sold separately
- Compatible with Modern Forms app
- Optional rippled acrylic diffuser sold separately RPL-SMOOTH-RDA

AIRFLOW/ENERGY EFFICIENCY

Weighted-Average/High Airflow CFM:	4182/6544
Weighted-Average/High Energy Use (W):	22/31
Estimated Yearly Energy Cost (\$):	6
Weighted-Average/High Efficiency (CFM/W):	190/211
Max RPM:	152

ORDER NUMBER

Model	Housing	Blade
FR-W2601-62L	BN Brushed Nickel	SL Silver
	MB Matte Black	MB Matte Black
	MW Matte White	MW Matte White
	SB Soft Brass	MB Matte Black

Example: **FR-W2601-56L-MB**

- *Results may vary based on application and surroundings.
- *This fan comes uni-pack - blade select options are not available

The Modern Forms app synchronizes seamlessly with smart home devices you already own



ModernForms.com Phone (866) 810-6615 Fax (800) 526-2585	Headquarters, East Manufacturing Facility 44 Harbor Park Drive Port Washington, NY 11050	South East Manufacturing Facility 1600 Distribution Ct Lithia Springs, GA 30122	Central Manufacturing Facility 1700 South J Elmer Freeway, Ste 100 Cedar Hill, TX 75104	West Manufacturing Facility 1750 S Archibald Ave Ontario, CA 91761
---------------------------------------------------------------	------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------	--------------------------------------------------------------------------

SPECIFICATIONS

Construction:	Aluminum, ABS
Blade:	16° Pitch, 56" sweep
Downrod:	.75"W x 6"H included
Mounting Slope:	Up to 30°
Wire:	80"
Hanging Weight:	12.8 lbs
Total Power:	47W
Standards:	UL/cUL Wet Location listed, Title 24 JA8-2016 Compliant, Title 20, Energy Star rated
Motor Type:	108 x 20 sensorless DC motor

WIRELESS PERFORMANCE

Wi-Fi Range:	Up to 150 ft*
Bluetooth Range:	Up to 150 ft*

LUMINAIRE PERFORMANCE

Light Source:	LED
Light Wattage:	16W
Lumens/Delivered Lumens:	1497 - 1606 (Based on CCT) / 707
Dimming:	Integrated
CRI:	90
CCT Color Temperature:	3000K (2700K/4000K/5000K) selectable
Rated Life:	50,000 hours







SMOOTH 5

FR-W2601-56L

56" Ceiling Fan

MODERN FORMS SMART FANS

OPTIONAL ACCESSORIES

Bluetooth Wall Control		F-WCBT	WT White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.
Bluetooth Remote Control		F-RCBT	WT White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Modern Forms Smart Fans. Includes easy-to-install wall cradle and batteries.
Downrod		XF-12 12IN XF-18 18IN XF-24 24IN XF-36 36IN XF-48 48IN XF-60 60IN XF-72 72IN		All our downrods are .75 (in) I.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers		XF-I		Connects two downrods together.
Sloped Ceiling Kit		CF-SCK		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.
Rippled Diffuser		RPL-SMOOTH-RDA		Rippled Injection-Molded Acrylic Diffuser

Examples: Wall Control: **F-WCBT-WT**, Remote Control: **F-RCBT-WT**, Downrod: **XF-12-BZ**, Downrod Coupler: **XF-I-MB**, Sloped Ceiling Kit: **XF-SCK-MW**

SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire

ModernForms.com	Headquarters, East Manufacturing Facility	South East Manufacturing Facility	Central Manufacturing Facility	West Manufacturing Facility
Phone (866) 810-6615	44 Harbor Park Drive	1600 Distribution Ct	1700 South J Elmer Freeway, Ste 100	1750 S Archibald Ave
Fax (800) 526-2585	Port Washington, NY 11050	Lithia Springs, GA 30122	Cedar Hill, TX 75104	Ontario, CA 91761