


Instruction



1. Take out all parts




2. Install the first wheel with a shaft and screw on the nut (note: it is better to adjust the wheel so that there is no gap between the frames and it does not affect the rotation of the wheel).

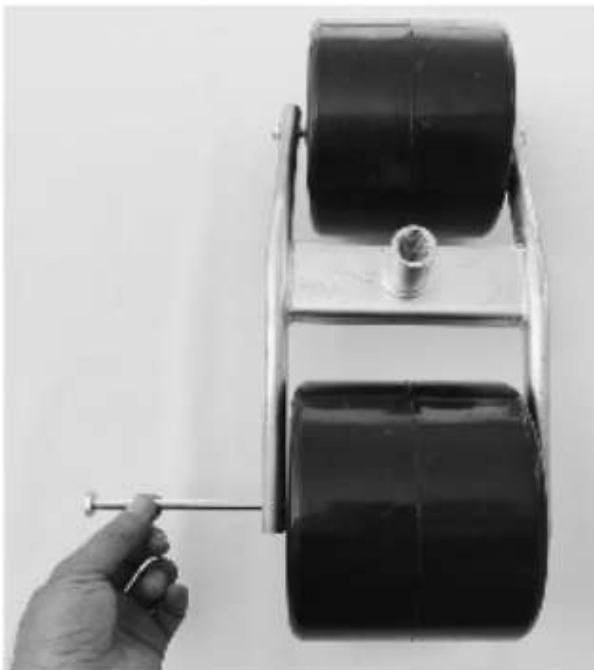

3. Install the second wheel in the same way as the first wheel.



4. Screw the seat clockwise into the frame

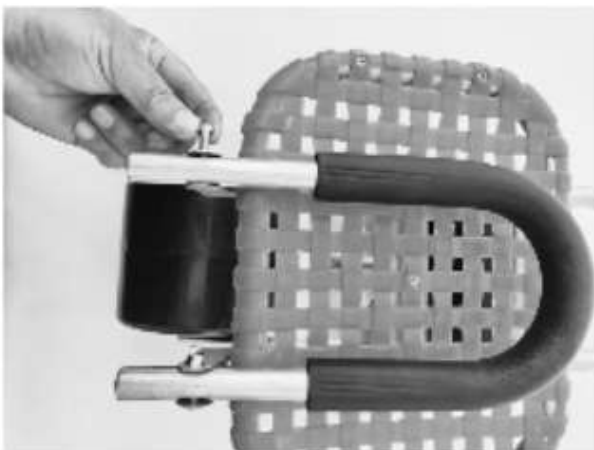

5. Attach the backrest to the chair and secure it with two small screws

6. complete product

