


USER MANUAL

Projector Light




1

Welcome

Thank you for choosing our product. We are committed to creating professional, high-quality and high-tech products, so that you can enjoy a convenient, high-definition digital life.

To ensure optimum performance and safety, please read these Instructions before operating this product. It's strongly recommended that you keep the manual for future reference.

Panel introduction

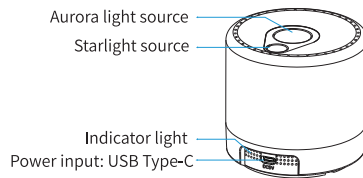


2

Button description




CAUTION

To avoid strong light radiation, please do not disassemble the panel.
Adapter: DC 5V 1A




Select scene effect

Star




Power on/off

On/Off




Aurora brightness adjustment

Brightness




Select aurora color

Color



Sound mode/Auto mode

Sound/Auto




Assisted sleep mode

Sleep

3

How to use the Base

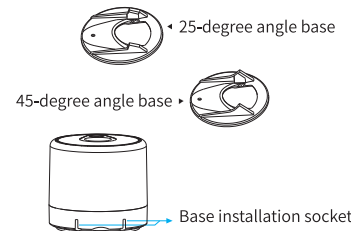


Desktop placement

Align the mounting socket of the base vertically with the plug of the base and push it to the end. You can choose either a 25-degree angle base or a 45-degree angle base as needed. (Figure 1)

Wall installation

- Screw the base on the wall. (Figure 2)
- Insert the light to the base. (Figure 3)

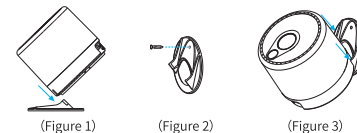

(Figure 1)

(Figure 2)


(Figure 3)

4

RF Remote control introduction

- Auto: Autorun mode or switching work mode
- Sound: Sound mode
- Sleep: Assisted sleep mode
- Color: Select aurora color
- Star: Select scene effect
- Breath: Breath mode

Select Assisted sleep mode, the light will change to breath mode about 10 minutes later, and it will automatically shut down over one hour.

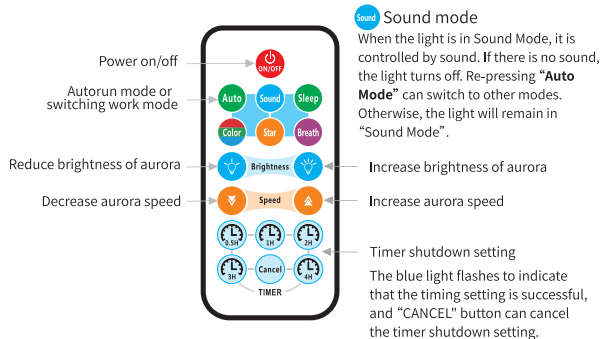

Notes

1. Activating the remote control:


Before using the remote for the first time, pull out the insulation tab from the battery compartment on the remote control. Battery has already been installed and will work once tab removed. Save and reinsert the tab if the light is not used for a long time to avoid any battery power leakage;



2. Replacing the Battery(please follow steps as the photo shows below):

- ① Pull the battery tray out of the battery compartment of remote control.
- ② Place new CR2025 button cell battery in the tray slot, as per the indicated polarity.
- ③ Close the battery tray.

Battery may not be included due to Aviation Safety.

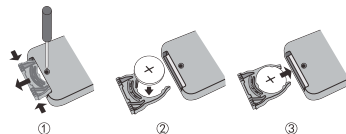

Caution

1. Please do not look directly at the light source output aperture of the projector light while using it, as it may cause eyes discomfort.
2. This product is suitable for dry environments, and please avoid using it in humid, overheated, and dusty environments. Good heat dissipation around the product, away from flammable objects or liquids.

Specification:

Aurora light color:	Red/Green/Blue
Starlight color:	Green
Light source:	LED
Adapter:	DC 5V 1A
Power input:	USB Type-C
Work mode:	Auto, Sound, Remote control
Product size:	Φ 3.3in*3in
Packaging weight:	0.62lb(0.28kg)
Package size:	4.92*4*3.74in

Packing List

- Projector light : 1
- Remote control : 1
- USB cable : 1
- User manual : 1
- Base : 2

This projector is designed and classified as Class 1 laser product per IEC 60825-1: 2014.

CLASS 1 CONSUMER LASER PRODUCT
EN 50689: 2021, IEC 60825-1:2014 &
EN 60825-1:2014+A11:2021

Emitted Wavelength: 515nm
Maximum Output: 0.39mW

Warning

Do not expose the naked eyes to the aperture. It is prohibited to expose the naked eyes directly to the projector light, as it may injure the eyes.

WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**
- **KEEP** new and used batteries **OUT OF REACH OF CHILDREN**
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.



MADE IN CHINA