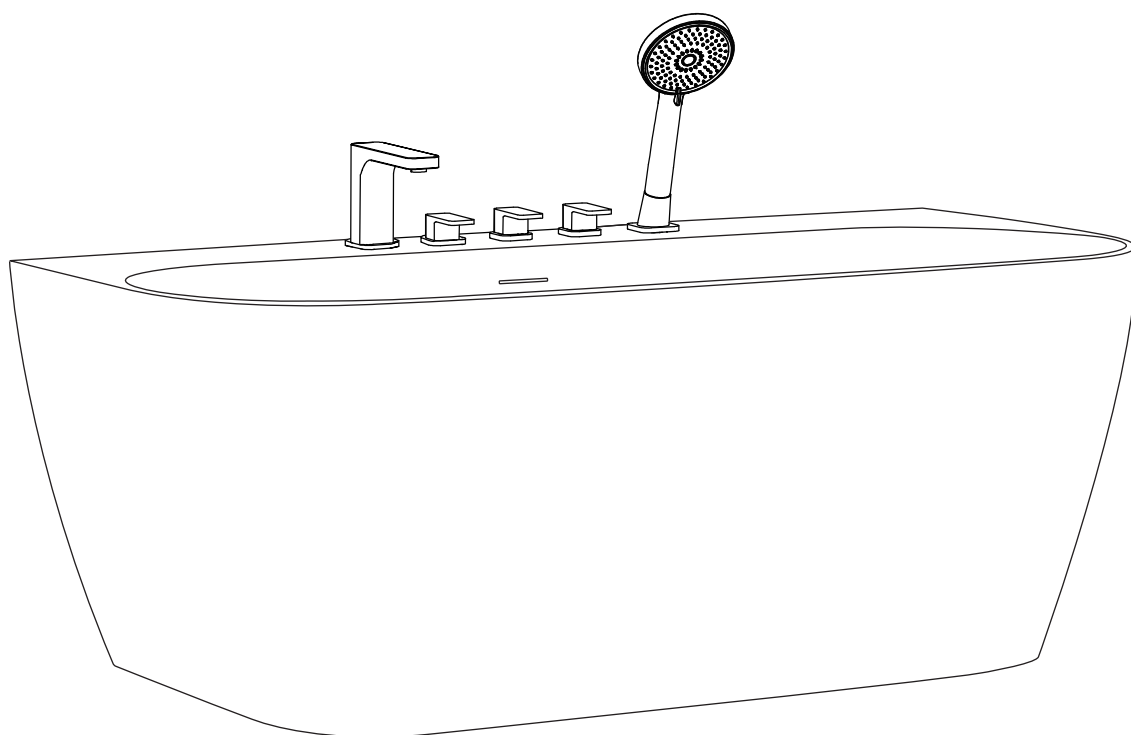


HOROW SU59-MB

Back-to-Wall Freestanding Bathtub



- Thank You for Choosing HOROW. Please read these instructions carefully before installation and keep this manual for future maintenance or reference.
- We are not responsible for the accidents resulting from the user's negligence.
- HOROW reserves the right to make revisions to this manual without notice.



Need help? Contact HOROW Customer Service Team.

Phone: (+1)209-200-8033

Monday to Friday

Email: support@horow.com

Important Information








1. Please keep the box and packaging materials until your product is completely installed.
2. If you have any questions, require technical assistance or have any problems with your product: please contact our Customer Service Team.
3. Please have the model number available and retain a copy of your purchase receipt for reference.
4. If for any reason this product does not meet your expectations, please repack this product in the original box and packaging material to avoid damage during transit.
5. Under no circumstances shall we be liable for any incidental damages sustained in connection with this product.
6. The step-by-step guidelines provided in this manual are intended as general guidance for installing HOROW products. In the event of any discrepancies, HOROW shall not be held liable.
7. Keep all small parts and packaging materials out of reach of children.
8. Dispose of packaging materials in accordance with local regulations.
9. Do not use this product for any purpose other than its intended use.
10. Product images shown in this manual are for reference only and may differ from the actual product.

Product Installation








Tools Needed for Installation

Please have these tools prepared prior to installation.

			
Safety Glasses	Wrench	Level	Caulk Gun & Sealant
			
Pencil	Tape Measure	Teflon Tape	Soft Cloth or Blanket

Parts Included

Please confirm that all items below are inside the box.


Hot Water Handle (1 pc)  Hot	Cold Water Handle (1 pc)  Cold	Diverter Handle (1 pc) 	Bathtub Spout (1 pc) 
Hand Shower Holder (1 pc) 	Hand Shower (1 pc) 	Hand Shower Hose (1 pc) 	Outlet Hose (2 pcs)  15-3/4" (400 mm) Cold (Blue) Hot (Red)
Water Supply Hose (2 pcs)  47-1/4" (1200 mm) Cold (Blue) Hot (Red)	Installation & User Manual 	Bathtub (1 pc) 	

Prior to Installation



1. CAUTION: Risk of personal injury. Two people are required to handle and install this product as it is fragile and heavy.
2. Inspect the bathtub prior to installation to make sure that it has not been damaged during shipping.
3. Make sure that you have all necessary parts by checking the parts list. If any part is missing or damaged, please contact our Customer Service Team.
4. Follow all applicable state and local plumbing and building codes.
5. Read the installation and maintenance instructions carefully before installation. Always use appropriate tools and wear appropriate personal protective equipment during installation.
6. HOROW strongly recommends professional installation by a licensed plumber.
7. Pre-install the floor drain pipe at the proper height before installing the bathtub.

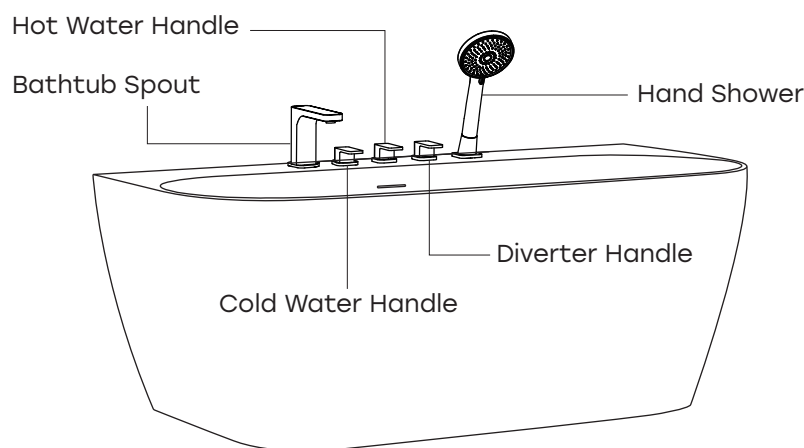Recommended Installation Diagram



Note:


The diagram shows a recommended installation layout for reference only. The actual installation positions may be adjusted based on the installation environment and user preferences.

Installation Procedure


1

Close the drain and fill the tub to the overflow level. Let the water stand for 30 minutes and check for leaks.

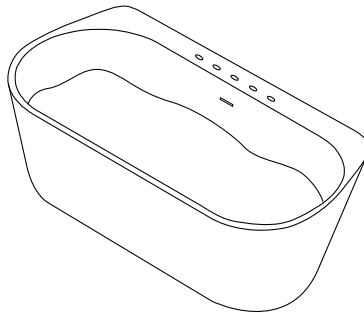If leaks are found, tighten or reseal the connections before installation.

**2**

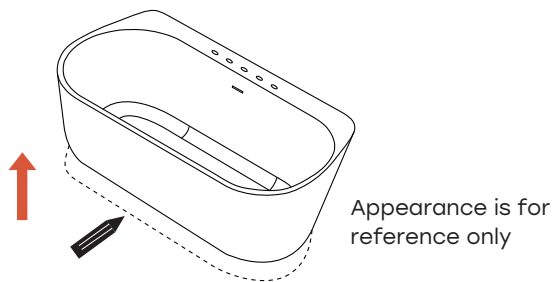
Position the bathtub in the desired location. Mark the outline of the bathtub base and the drain hole location on the floor.

**3**

Turn the bathtub upside down and place it on a soft cloth or blanket.

Loosen the nuts and washers on the metal frame.

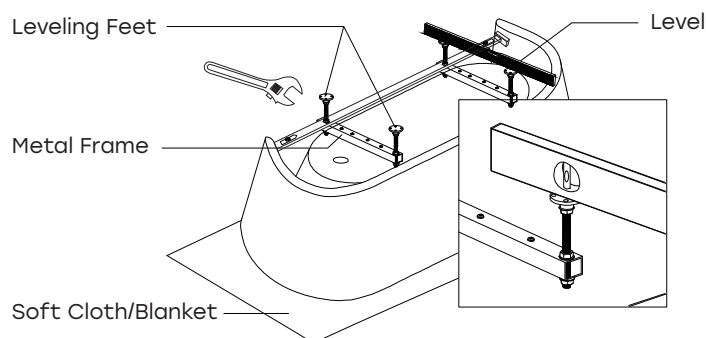
Adjust the leveling feet until they align with the bathtub base. Then raise the leveling feet an additional 1/8" to 3/16" (3-5 mm) to ensure the weight of the bathtub, water and user is fully supported by the leveling feet rather than the tub walls.




4 Faucet and Hand Shower Installation

The faucet components and hand shower must be installed in the designated locations.

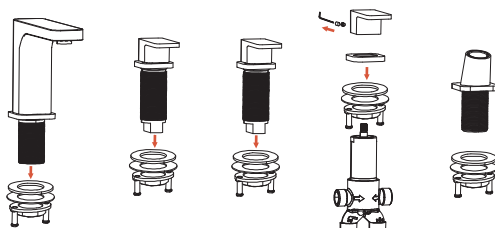
Remove the screws, nuts, and washers from the spout, cold water handle, hot water handle, diverter handle, and hand shower holder.



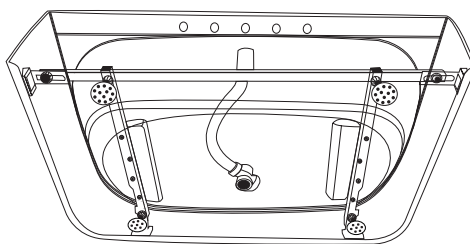
Carefully lay the bathtub on its side on a soft cloth or blanket to protect the surface from scratches.



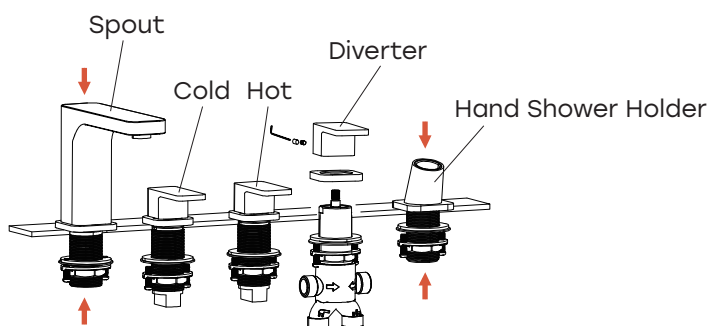
Insert the spout, cold water handle, hot water handle, diverter handle, and hand shower holder into the corresponding holes as shown below. Tighten the nuts and screws. Install the escutcheon and handle onto the diverter handle assembly, and tighten the screws.




Connect the spout hose to the outlet on the bottom of the diverter assembly. Route the supplied hand shower hose through the hand shower holder and connect it to the corresponding outlet on the bottom of the diverter assembly. Connect the 15-3/4" (400 mm) outlet hoses from the hot and cold water handles to the two water inlets on the diverter handle. Then connect the cold water supply hose (blue) and the hot water supply hose (red) to the corresponding connections on the diverter assembly. Tighten the connections with a wrench.

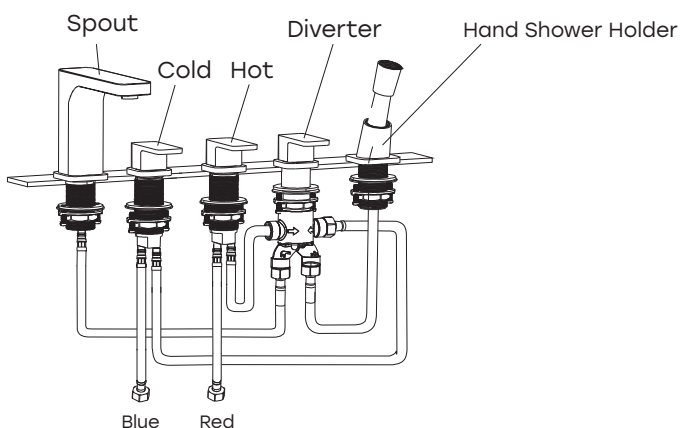

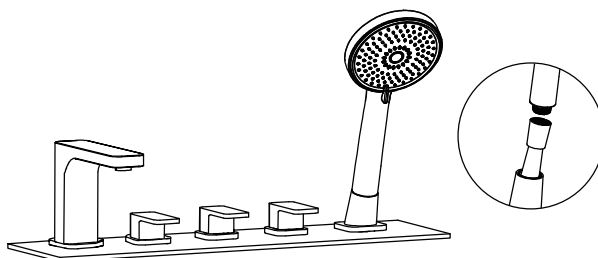Connect the hand shower to the hose and place it in the hand shower holder. Connect the hand shower to the hose and place it in the hand shower holder.




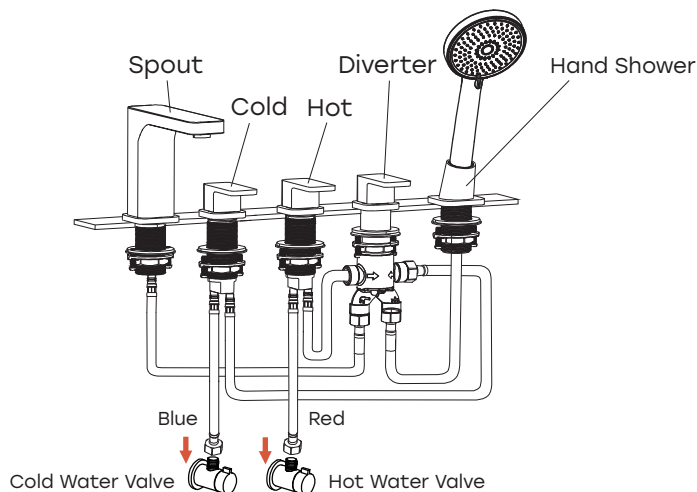Connect the cold water supply hose (blue) and the hot water supply hose (red) to the cold and hot angle valves, respectively. Tighten the connections with a wrench.




5

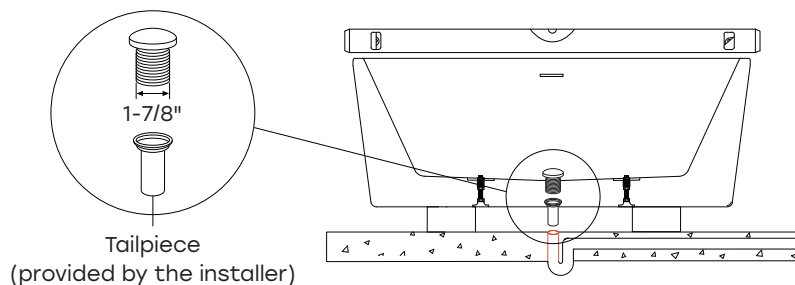Move the bathtub back to the marked position. Use a tailpiece (not included) to connect to the drain pipe.



6

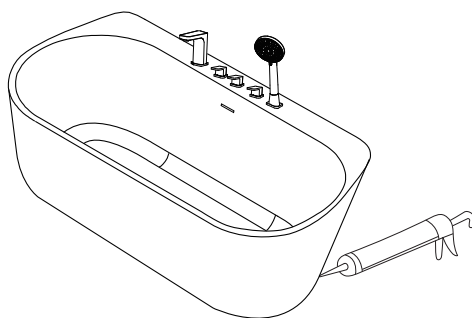Apply silicone sealant around the base of the bathtub to create a watertight seal. Remove excess sealant.



Care and Maintenance



- ※ Clean the surface with mild soapy water and rinse thoroughly. Wipe dry with a soft cloth.
- ※ For stubborn stains, use a powdered detergent with a damp sponge or nylon scouring pad.
- ※ Do not use abrasive scouring powders, cleansers or pads, as they may scratch, damage and dull the surface.
- ※ Do not use detergents, disinfectants or cleaning products in aerosol cans, as they may damage the fittings.
- ※ Always test your cleaning solution on a small and inconspicuous area before applying it to the entire surface.
- ※ Do not allow cleaners to soak on the surface.
- ※ Avoid contact with hair dye or nail polish, as these products may stain the surface.

