

E14 Bulb x 10

Before You Start

Warnings

For your safety, this product must be installed in accordance with local Building Regulations. If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-certification scheme.

Further information is available online or from your Local Authority.

We suggest you retain these instructions for future reference. Light fittings should be connected to a 5 amp fused circuit.

This light fitting is suitable for indoor use only.

Before commencing installation, isolate the circuit to be used by removing the fuse or circuit breaker at the consumer distribution unit.

Do's

We suggest you spend a short time reading through this leaflet before you start.

When you are ready to start, make sure that you have the right tools and plenty of space.

Unwrap all packaging materials and place the components on a clean surface to protect it from damage.

Carefully check that you have all the parts before beginning assembly. Always switch off the supply before changing lightbulbs or cleaning. Allow bulbs to cool down before handling.

Don'ts

The fitting should NOT be fitted to newly painted or plastered surfaces as this may cause discolouration of the finish.

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will rub away the protective coating.

Number of people required to assemble


One Person who is competent with electrical wiring and installation, however we do recommend that this item is installed by a qualified electrician.

Tools required

Two screwdrivers one suitable for a slotted screw and one suitable for a cross-headed screw

Small electrical screwdriver Insulating tape.

E14 Bulb x 10

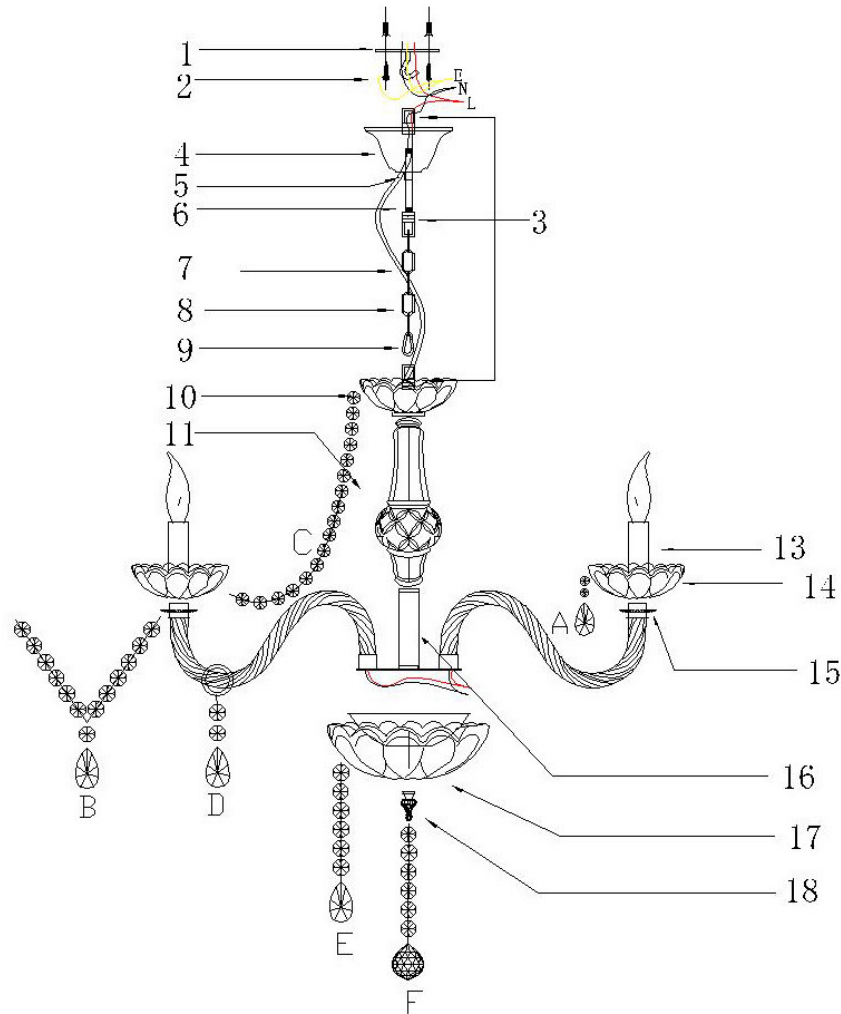

- | | |
|-------------------|------------------------|
| 1. Mounting plate | 10. Top cup |
| 2. Screws | 11. Glass stem |
| 3. Hanging nut | 12. Glass ball |
| 4. Ceiling rose | 13. Metal tube |
| 5. Small screw | 14. Glass cup |
| 6. Metal rod | 15. Metal washer |
| 7. Electric wire | 16. Metal tube |
| 8. Metal chain | 17. Bottom bowl |
| 9. Lock catch | 18. Metal cap & washer |

A: 2*14#+38# 40pcs

B: (6+6+2)*14#+50# 10pcs

C: 16*14# 10pcs

D: 40#+2*14#+50# 10pcs




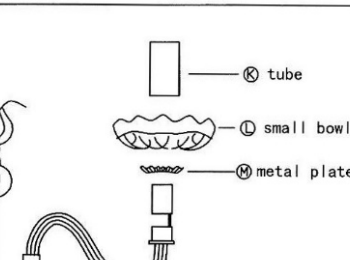






E: 8*14#+50# 6pcs

F: 8*14#+40# 1pcs

E14 Bulb x 10

Installation diagram

2/2 page

 <p>Step 1: Take the hole position of hanging plate as reference, fix the hole position on the ceiling, suggest to use pen to draw good position.</p>	 <p>Step 2: use the \varnothing 6 mm drill two holes on the ceiling, according to the drawing before a good location</p>		
 <p>Step 3: hammer A Colloidal particles into the hole that has been drilled.</p>	 <p>Step 4: screw the screwdriver, rotate C the tapping screw, and fix B mounting anchor to the ceiling with the self-tapping screw.</p>	<p>Step 7: remove the upper nut of the lamp arm tooth tube. Pass the lamp arm wire and the tooth tube through the circular disc hole. Then, push the gasket nut through the wire and lock the nut. Live line(L)(lettering on the wire)</p> <p>of the lamp arm is connected with Live line(L) of the lamp body, neutral line(N) of the lamp arm is connected with neutral line(N) of the lamp body.</p> <p>Warning: this is very important here, can not receive wrong!</p>	<p>Step 9: First put the transparent ring on the lamp arm, then put M the metal plates on the lamp arm, then put L the small bowl, then put K the tube, finally turn the light bulb, test the light to see if it will be on. If it doesn't work, check the wiring. Note: K the tube should be inserted into the middle hole of L the small bowl.</p>
 <p>Step 5: put the hanging pole H through the canopy G, twist The suspension loop E on the hanging pole H, and hang The suspension loop E on themounting anchor, B, and then connect the two main lines of the lamp body to the two power lines on the ceiling respectively. Be careful not to connect wrong, there is a word line is live line, there is earth wire</p>	 <p>Step 6: touch the canopy to the ceiling, cover the wire, and tighten the fixing screw on the side of the canopy with a screwdriver to prevent the canopy from falling.</p> <p>① hanging chain hanging chain are linked one by one. If they are long, they can be shortened by removing a few rings, Note that the spring buckle is securely fastened to the lamp body hanger ring</p>	 <p>Step 8: after connecting the wire, tighten the corrugated tube, and fix the metal bowl, bowl and lid use single nut in order</p>	 <p>Step 10: Find the crystal packaging according to the beaded schematic and hang the crystal pendant to the corresponding position of the lamp body according to the number on the bag.</p>