



# Karbon® | K-6268-C11

Articulating deck-mount bar sink faucet with 6" spout, Silver tube and lever handle

## Features

- Unique articulated-joint design directs water to any angle and folds out of the way when not in use
- Single 1-5/16" (33 mm) diameter remote joystick lever handle is simple to use and makes adjusting water temperature easy
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Integral sprayhead provides laminar flow or aerated spray at the touch of a button
- Variable spout reach from less than 2" (51 mm) to over 13" (330 mm)
- 1.8 gpm (6.8 lpm) maximum flow rate at 60 psi (4.14 bar)



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-30-2026 00:16 - US-CA

THE BOLD LOOK  
OF **KOHLER**®

## Codes/Standards

*ADA, CSA B651 compliant when installed to the specific requirements of these regulations.*

ADA CSA B651

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 372  
NSF/ANSI/CAN 61  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
NSF/ANSI/CAN 61|NSF/ANSI/CAN 372  
ADA  
ICC/ANSI A117.1  
CSA B651

## Technical Information

*All product dimensions are nominal.*

### Handle

Handle Style/Type: Lever

### Spout

Spout Reach: 6" (152 mm)

### Flow Rate

Faucet Flow Rate: 1.75 gpm (6.6 l/min)

## Material

- Premium metal and carbon fiber construction
- KOHLER finishes resist corrosion and tarnishing

## Recommended Products/Accessories


K-23723 Faucet cleaner

## Warranty

*See website for detailed warranty information.*

KOHLER® Faucet Lifetime Limited Warranty



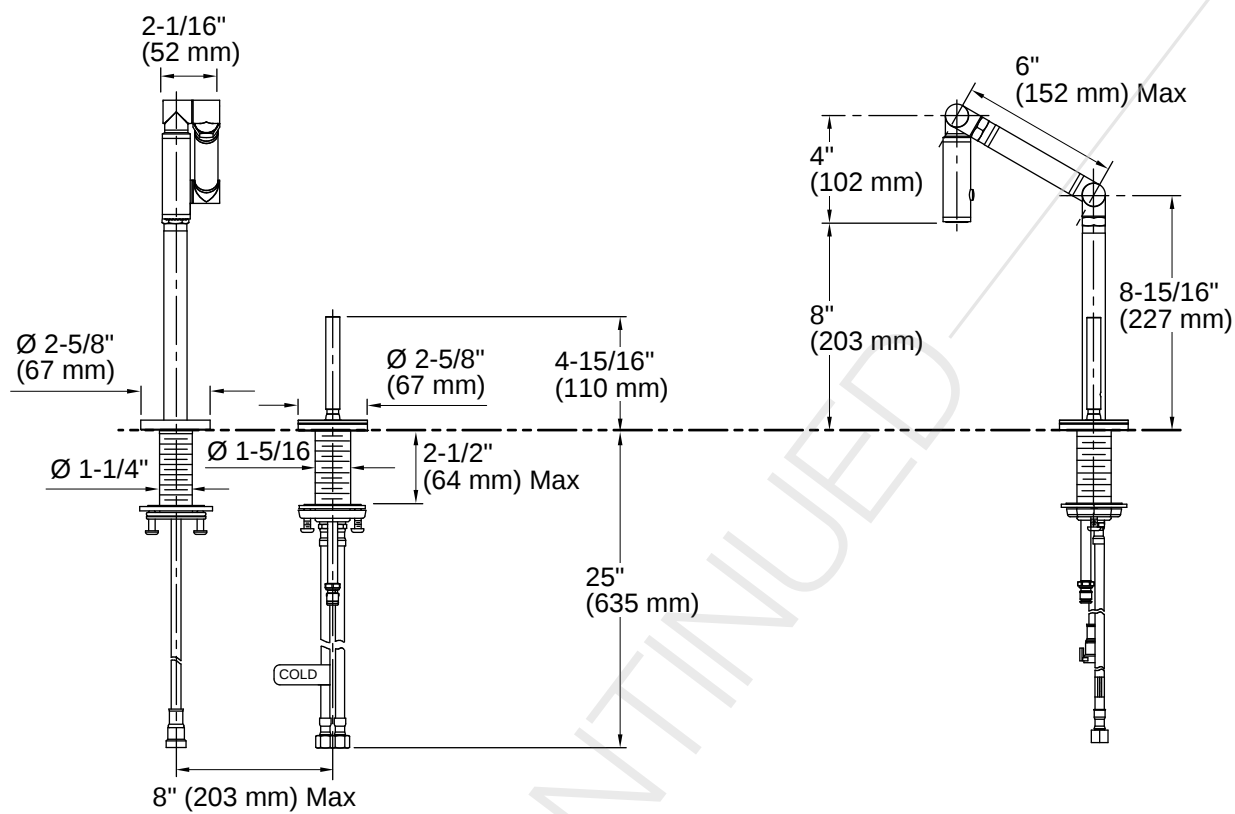

## Installation

- Two-hole deck-mount
- Flexible supply lines and installation ring simplify installation

## Installation Notes

*Install this product according to the installation instructions.*

ADA compliant for faucet handles only  
 ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

