




DIMENSIONS:

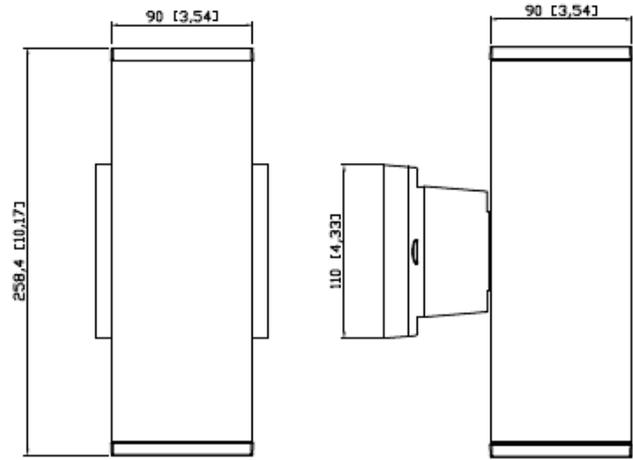

WMCS-UDL-MCT-BR-DT
WMCS-UDL-MCT-BN-DT

LED WALL MOUNT CYLINDER LIGHTS

Ideal for general site lighting, walkways and stairways, alleys, loading docks, doorway, pathway and parking areas

ELECTRICAL SPECIFICATIONS:

- Voltage: 120V
- Wattage: 24W (Up-Down light)
- Power Factor: 0.95
- Efficacy: 80LM/W

HOUSING SPECIFICATIONS:

- Outdoor Wall Cylinders
- Housing: Aluminum
- Finish: Bronze & Brushed Nickel
- Lifespan: 50,000 hr.
- providing a reliable weather-tight seal
- IP Rating: IP65, Suitable for Wet Locations

CERTIFICATIONS: ETL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
WMCS-UDL-MCT-BR-DT	24W	120V	1920LM	MCT*
WMCS-UDL-MCT-BN-DT	24W	120V	1920LM	MCT*

LIGHTING SPECIFICATIONS:

- Dimming: TRIAC dimming
- Light directions: UP and DOWN
- Lens: Clear glass
- Total lumens: 1920LM
- Color temperature: MCT: 5000K/4000K/3000K
- Color rendering index: >80

WARRANTY: 7 years

