


SWIVEL CHAIR

Instruction Manual

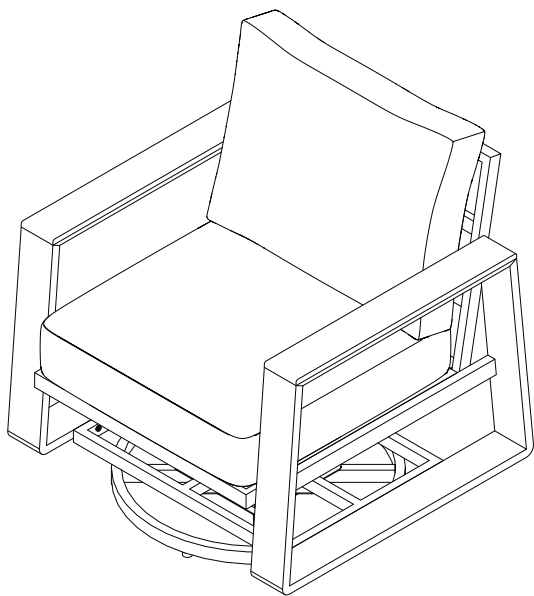

- Excellent weather resistance
- Easy to clean and maintain

Email: wycatwork@gmail.com

Instruction Manual

ASSEMBLY INSTRUCTIONS:

- Our clear, easy-to-follow, step-by-step instructions will guide you through the project from start to finish.
- Do not skip any steps. It is of utmost importance to assemble all of the parts according to the directions.
- Item identification: For ease of identification, all parts are labeled to correspond to the step number in which the part is used.

IMPORTANT:

- Read following instructions carefully before using the swivel chair.
- Be aware that some parts are heavy and have sharp edges.
- Do not overtighten screws (Insert all screws before tighten screws).
- Firmly secure all bolts, screws and nuts before use.
- Please do not exceed the weight limitations of this item.
- Reconfirm that all bolts, screws, and nuts are secure every 90 days.

CARE & SAFETY:

- Always use on firm level ground.
- Keep all children and pets away from assembly area. Children and pets should be supervised while the product is being assembled.
- The assembled product should be located at least 6 feet (2m) from any obstruction such as fence, garage, house, overhanging branches, laundry lines or electrical wires.
- Do not use or store this item in the proximity of open flame or flammable/-combustible chemicals.
- In case of fire, do not attempt to extinguish any burning polypropylene with water.
- Please contact Customer Service if you have any problems or discover any missing parts.

Care & Maintenance



Do not clean furniture with harsh cleansers or polish, avoid using steel wool to clean the furniture.



To obtain the longest lifespan of your outdoor products, minimizing exposure to direct sunlight is recommended.



Children should not climb or jump on the furniture.



To obtain the longest lifespan of your outdoor products, avoid extended and lengthy exposure to rain and snow. Whenever possible cover the product and /or place under patio or awnings.



Stains may be removed with mild soap solution and damp cloth.



Keep away from sources of ignition.












Dust and pick-up spills using a clean, non-colored, lint-free cloth.










Do not use sharp objects on the product surface.

ASSEMBLY PARTS

A 	B 
Right Armrest: 1 pc	Left Armrest: 1 pc
C 	D 
Seat Panel: 1 pc	Backrest: 1 pc
E 	F 
Support Frame: 1 pc	Bottom Frame: 1 pc
G 	H 
Swivel Plate: 1 pc	Seat Cushion: 1 pc
I 	
Back Cushion: 1pc	



ASSEMBLY PARTS

① 	② 
M6*40 Screws: 2 pcs	M6*35 Screws: 6 pcs
③ 	④ 
M6*30 Screws: 4 pcs	M6*15 Screws: 8 pcs
⑤ 	⑥ 
Washers: 8 pcs	Allen Wrench: 1 pc







Please Contact:
wycatwork@gmail.com

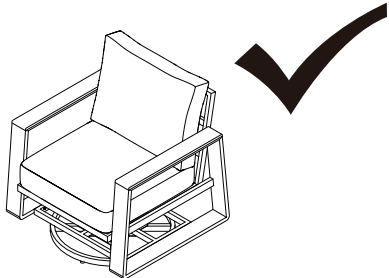



Step 1

Place the swivel plate(G) onto the bottom frame(F), align the holes, then put the washers(⑤) insert the M6*15 screws(④). Use Allen wrench(⑥) to tighten the M6*15 screws(④).



G x1




F x1




④ x4



⑤ x4




⑥ x1

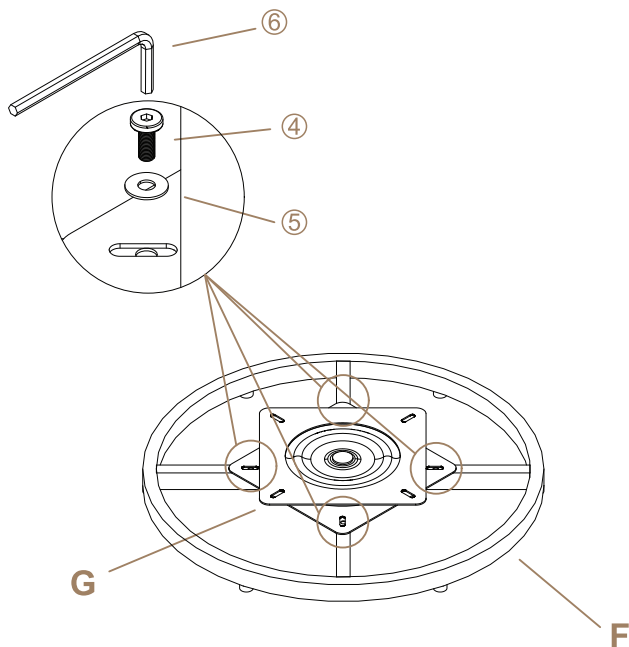


Step 2


After completing Step 1, flip the connected unit so that the bottom frame (F) is on top of the swivel plate (G).



G x1




F x1

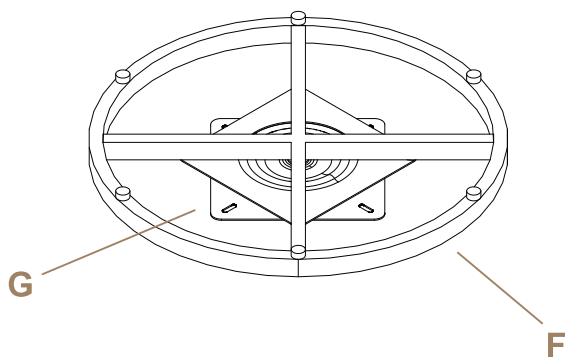


Step 3


Take the connected swivel plate (G) and bottom frame (F), place them onto the support frame (E), align the holes, then put the washers(⑤) insert the M6*15 screws(④). Use Allen wrench(⑥) to tighten the M6*15 screws(④).



Gx1



Fx1




Ex1




④x4



⑤x4




⑥x1

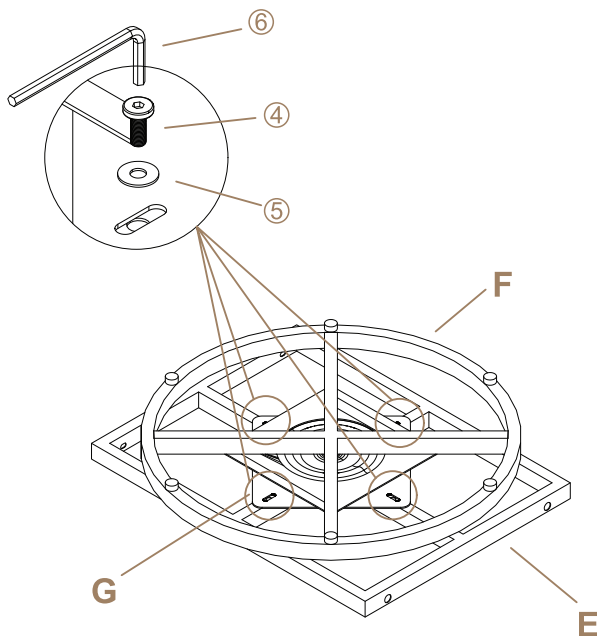


Step 4


Connect the seat panel(C) with the backrest(D) together, first insert all the M6*40 screws(①) into the hole and align them, then use the Allen wrench(⑥) to tighten the M6*40 screws(①).




C x1



D x1




① x2




⑥ x1

Note: Leave a 5mm gap when installing the screws. Tighten them only after aligning the backrest (D) and armrest holes in the next step.

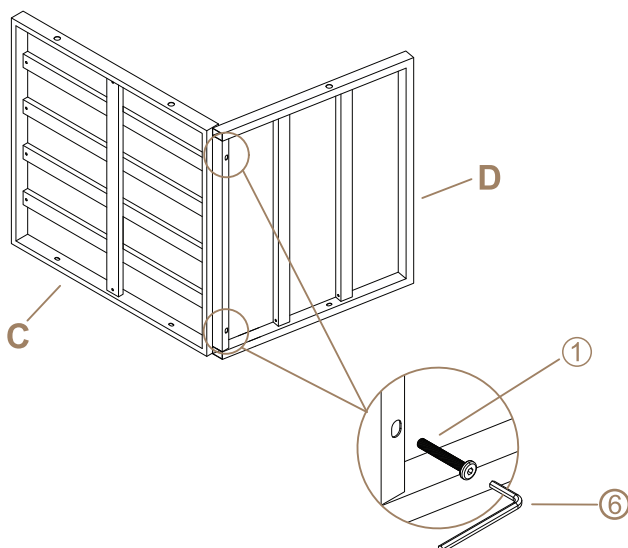


Step 5


Connect the right armrest(A) with the seat panel and backrest together, align the holes, then use Allen wrench(⑥) to tighten M6*35 screws (②) and M6*30(③) screws completely.




Ax1




Cx1




Dx1




②x1



③x2




⑥x1

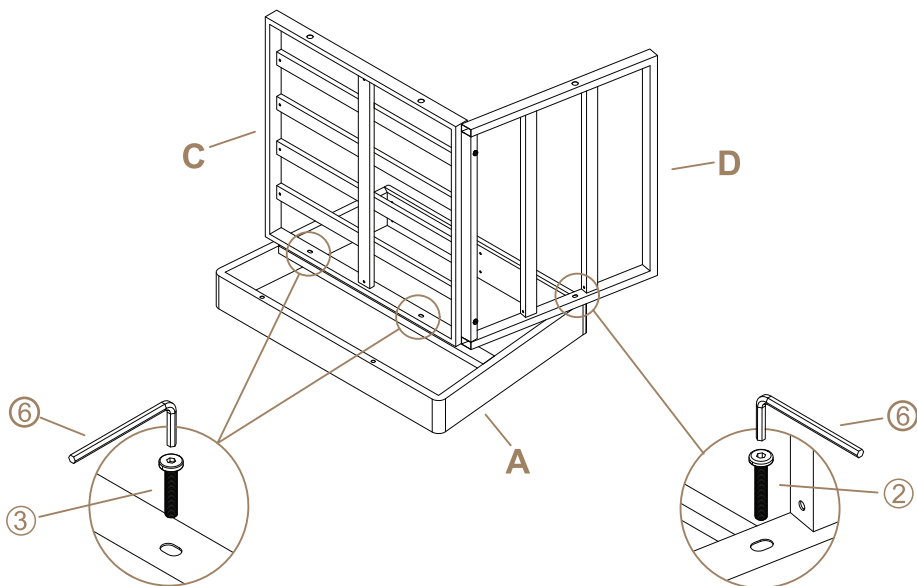


Step 6


Connect the left armrest(B) with the seat panel and backrest together, align the holes, then use Allen wrench(⑥) to tighten M6*35 screws (②) and M6*30(③) screws completely.




A x1




B x1




C x1




D x1




② x1



③ x2




⑥ x1

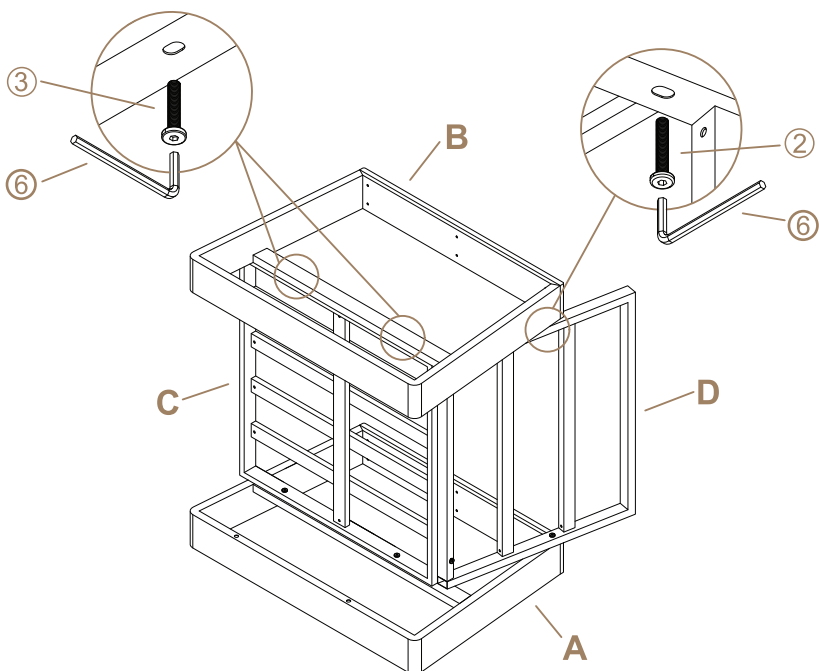


Step 7

Connect the seat and swivel base together, align the holes, then use Allen wrench (⑥) to tighten M6*35 screws (②) completely.

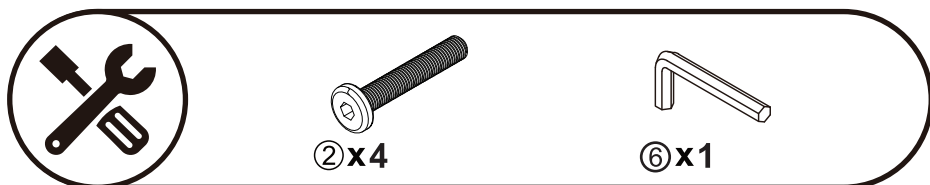


Note: To install, partially thread 4 screws into their corresponding holes about 4/5 of the way.
Once align all screws, tighten them completely.

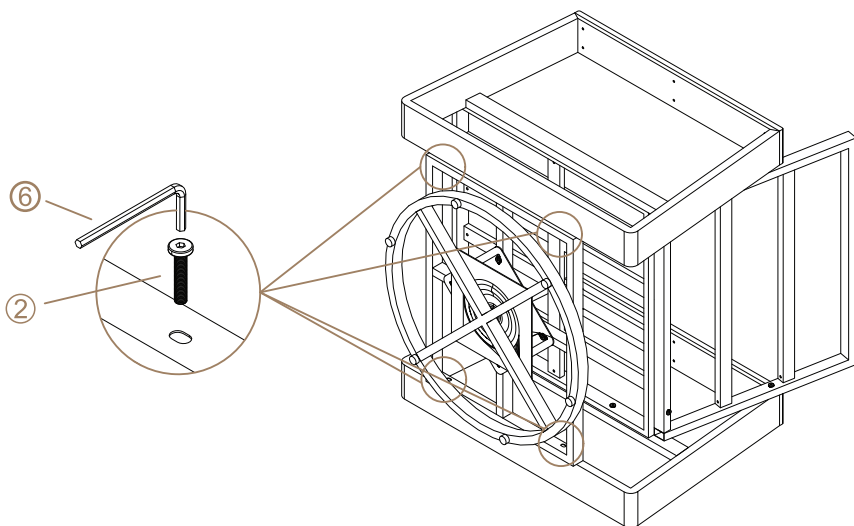


Step 8

Place the sofa upright and put the seat cushions(H) and back cushions(I).



I x1




H x1

PAY ATTENTION

Avoid sitting on the front edge or armrests to prevent the chair from tipping over.

Do not exceed the maximum load of 220 LBS.

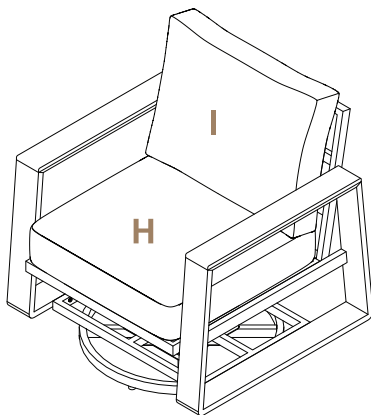

DONE!

*Due to transportation, the cushion may be slightly compressed and the surface fabric may have creases. It will take time to recover, but gently tapping it can speed up the rebound.

WARRANTY

Swivel Chair

3-year basic Warranty Program

- ▶ We offers a 3-year basic warranty on the entire swivel chair from the date of purchase against defects in material and workmanship. During this period we will repair and replace, at our discretion the defective component.
- ▶ This warranty does not apply to improperly installed, handled, abused, damaged by user error, nor to any unit which has been repaired or altered by unauthorized repair companies.
- ▶ Under no circumstances will the customer entitled warranty to consequential or incidental damages. This limited 3-year basic warranty will only grant customers certain legal rights; customers may have other rights according to different state laws.

HOW TO CONTACT US ON AMAZON?

Step 1:


Log in to your
Amazon account.

Step 2:

Go to Your Orders.
Select the item you
purchased from us.

Step 3:

Select Contact seller.

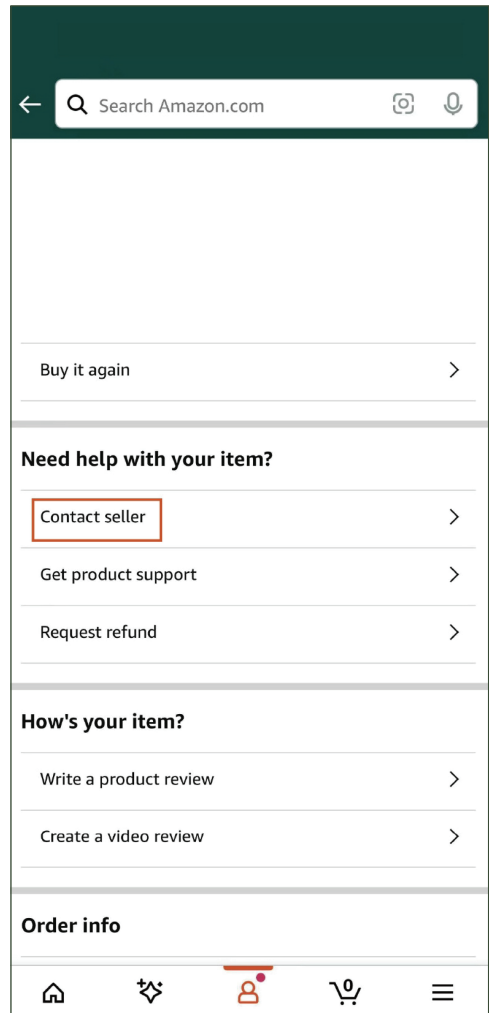

Swivel Chair



THANK YOU
FOR YOUR PURCHASE ON US
YOUR SUPPORT MEANS A LOT TO US



Scan to watch installation video
and activate your warranty.

THANK YOU FOR SHOPPING WITH US!

If you have any questions, or need assistance with use, parts, or customer service, please contact: **wycatwork@gmail.com**. To help us identify your order, please include your 17-digit Amazon Order #.
Our professional team will be there to assist you.

Customer Service Team

CUSTOMER SUPPORT



wycatwork@gmail.com
(Email)

Whatsapp
Toll Free

