

RECESSED


DOWNLIGHT RETROFIT

CCT SELECT


4" & 5-6"



4"

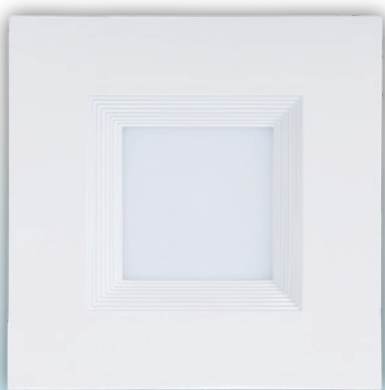

BAFFLED

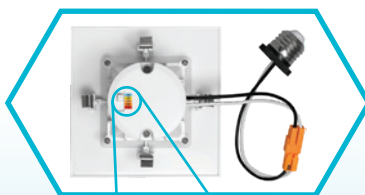

CCT DIP SWITCH



SMOOTH

5-6"



CCT DIP SWITCH



SPECIFICATIONS

ELECTRICAL

		MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	FREQUENCY	LUMEN EFFICACY	LIFETIME
4"	BAFFLED	LR23784	LED/DL4/5CCT/FL/B/SQ	11	120V	YES	60Hz	88	50,000
	SMOOTH	LR23785	LED/DL4/5CCT/FL/SQ	11	120V	YES	60Hz	88	50,000
5-6"	BAFFLED	LR23788	LED/DL5-6/5CCT/FL/B/SQ	14	120V	YES	60Hz	88	50,000
	SMOOTH	LR23789	LED/DL5-6/5CCT/FL/SQ	14	120V	YES	60Hz	88	50,000

PHOTOMETRIC

MODEL	COLOR (CCT)	TEMP	LUMEN	CRI	FINISH	IC RATED	WET LOCATION	COST/YR	ETL LISTED	ENERGY STAR	TITLE 24
LR23784	2700K, 3000K, 3500K, 4000K, 5000K	CCT CHANGING	750	90	WHITE	YES	YES	\$ 1.02	YES	YES	
LR23785	2700K, 3000K, 3500K, 4000K, 5000K	CCT CHANGING	750	90	WHITE	YES	YES	\$ 1.02	YES	YES	
LR23788	2700K, 3000K, 3500K, 4000K, 5000K	CCT CHANGING	1100	90	WHITE	YES	YES	\$ 1.51	YES	YES	YES
LR23789	2700K, 3000K, 3500K, 4000K, 5000K	CCT CHANGING	1100	90	WHITE	YES	YES	\$ 1.51	YES	YES	YES

GENERAL

DIMENSIONS

