


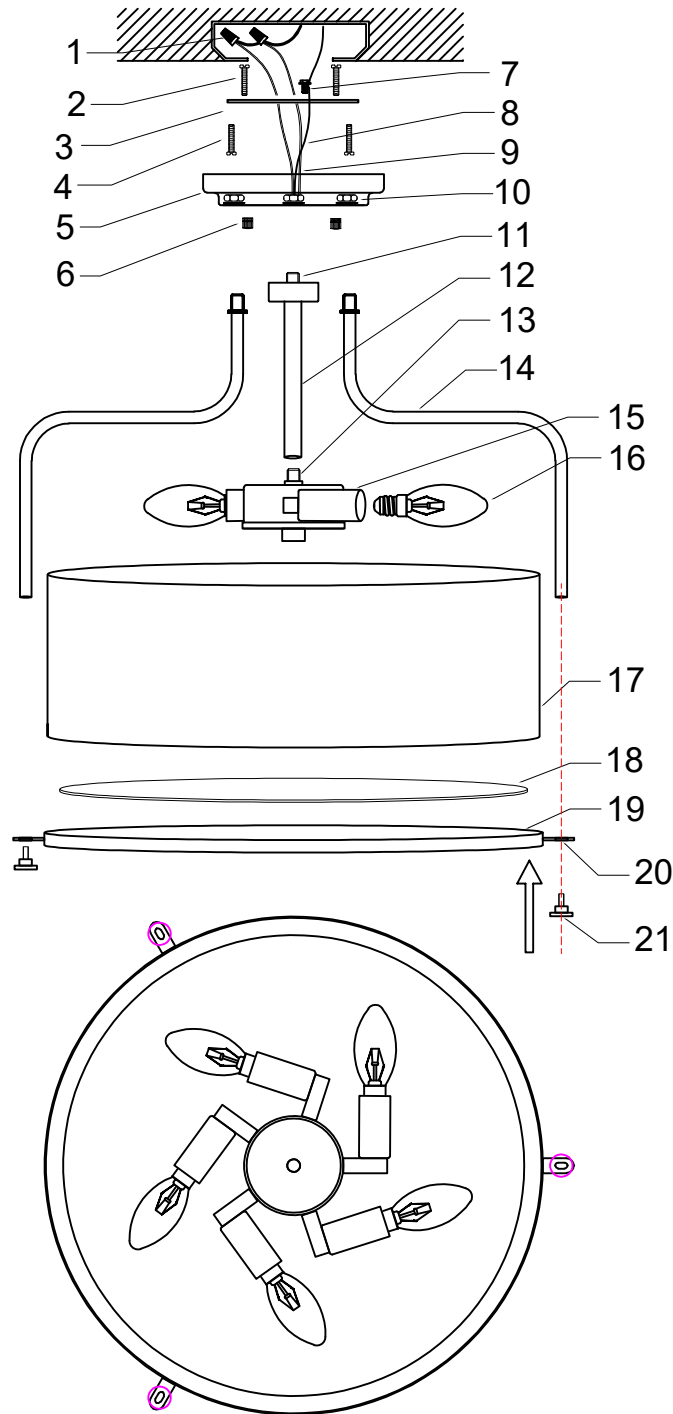

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

- A: Thread the straight tube (12) and ceiling plate (5) sequentially through the main wire (9) and ground wire (8);
 - B: Fasten the straight tube (12) to the threaded tube (13);
 - C: Secure the ceiling plate (5) to the threaded tube (11) with the screw washer (10);
 - D: Secure the lamp arm (14) to the ceiling plate (5) with the screw washer (10), then adjust to the desired angle;
 - E: Secure the lampshade diffuser (18) and lampshade (17) with the metal ring (19). Then pass the screw rod (21) through rail clips (20) and tighten clockwise onto the lamp arm (14);
 - F: Install the bulb (16) (not included) into the lamp holder (15) as indicated;
 - G: Secure the mounting bracket (3) to the junction box with screw rods (4);
- H:
- (1) Connect the black wire of the main wire (9) to the live wire, and the white wire to the neutral wire, attach them separately with wire connectors (1);
 - (2) Pay attention that the bare wire can not be exposed to prevent leakage of electricity;
 - (3) Then fix the ground wire of the light (8) and external ground wire on the mounting bracket (3) with green screws (7);
- I: Pass the ceiling plate (5) through the screw rod (2), then tighten the cap nut (6) to secure the light fixture.