
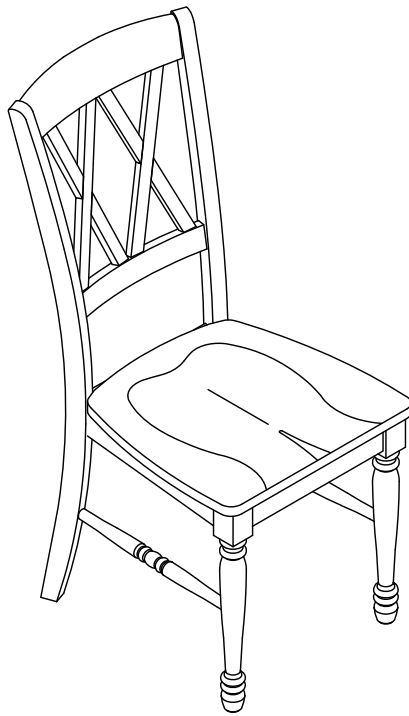
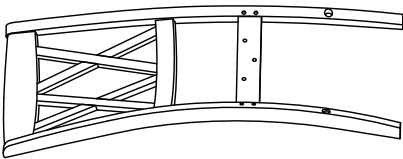











Dining Chair



PART LIST


A 	B 	C 
Chair Back 1 PC	Seat Frame 1 PC	Left Front Leg 1 PC
D 	E 	
Right Front Leg 1 PC	Side Stretcher 2 PCS	

HARDWARE LIST

#1 	#2 	#3 
1-3/4" x Ø1/4" x D12 Short Bolt 3 PCS	3-3/8" x Ø1/4" x D12 Long Bolt 4 PCS	1/8" x 1-1/2"L Screw 4 PCS
#4 	#5 	#6 
Flat Washer 11 PCS	Spring Washer 11 PCS	Nut 4 PCS
#7 	#8 	
Wrench 1 PC	Allen Key 1 PC	


ADDITIONAL TOOLS (Not Provided)

Note: It is not recommended to use power tools during assembly.




Phillips Head Screw Driver


Step 1. Carefully turn seat frame (part #B) upside down on a soft protective surface such as a carpet. Attach left front leg (part #C) and right front leg (part #D) to seat frame (part #B) by using flat washers (part #4), spring washers (part #5), nuts (part #6) and wrench (part #7).
Note: Please do not fully tighten bolts until unit is fully assembled.

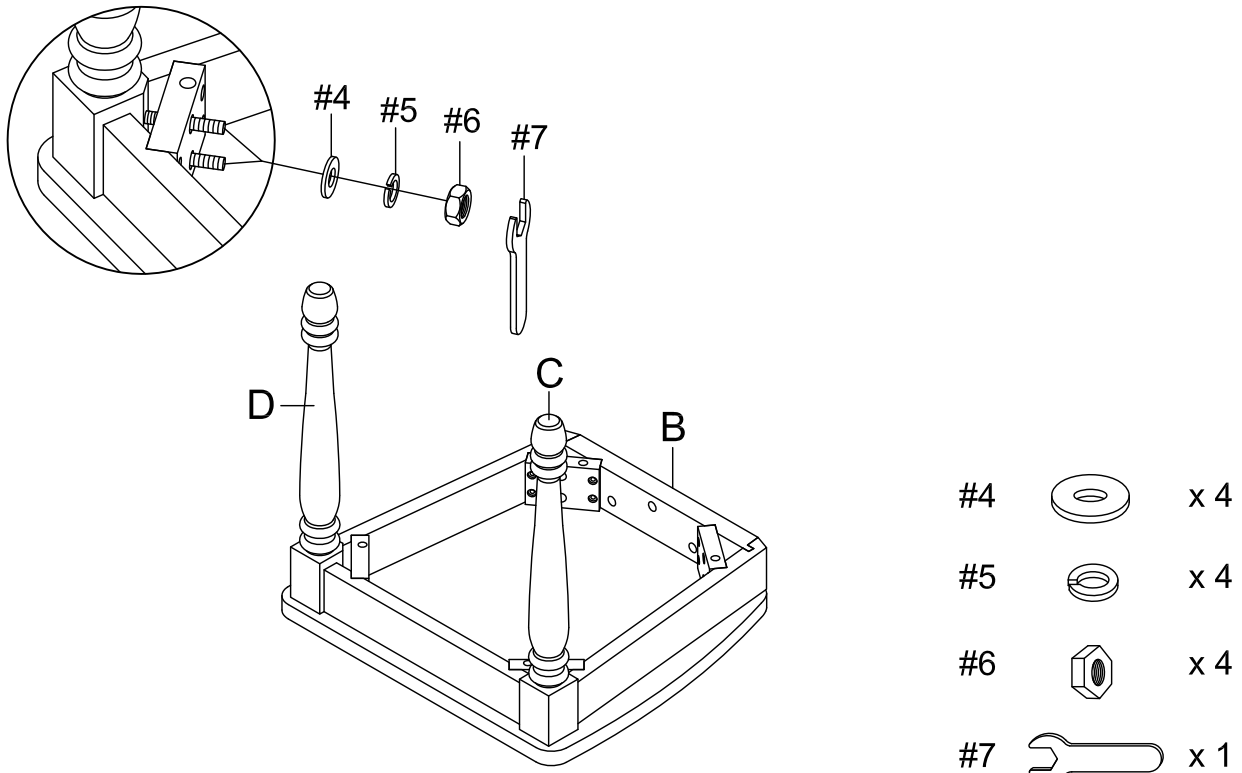

Step 2. Carefully turn the chair back (part #A) upside down. Attach assembled parts (part #B, #C & #D) to chair back (part #A) by using side stretchers (part #E), flat washers (part #4), spring washers (part #5), short bolts (part #1) and Allen key (part #8).

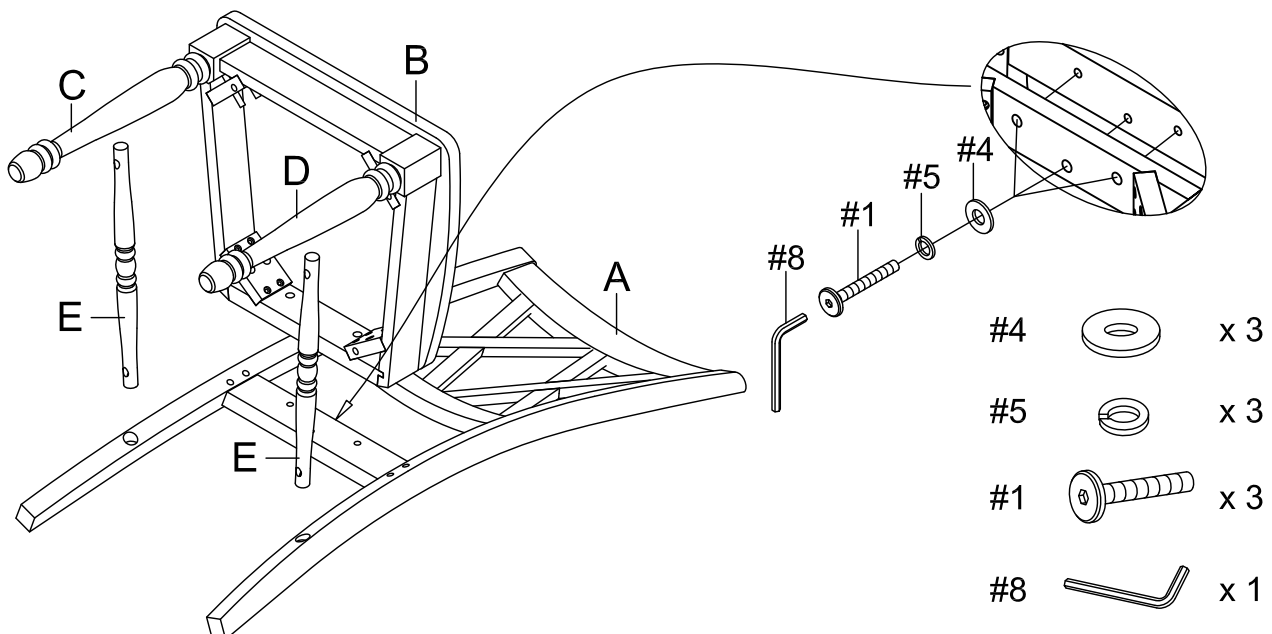

Step 3. Insert flat washers (part #4), spring washers (part#5), long bolts (part #2) into the holes at corner of seat frame (part #B) and chair back (part #A) and tighten by using Allen key (part #8).

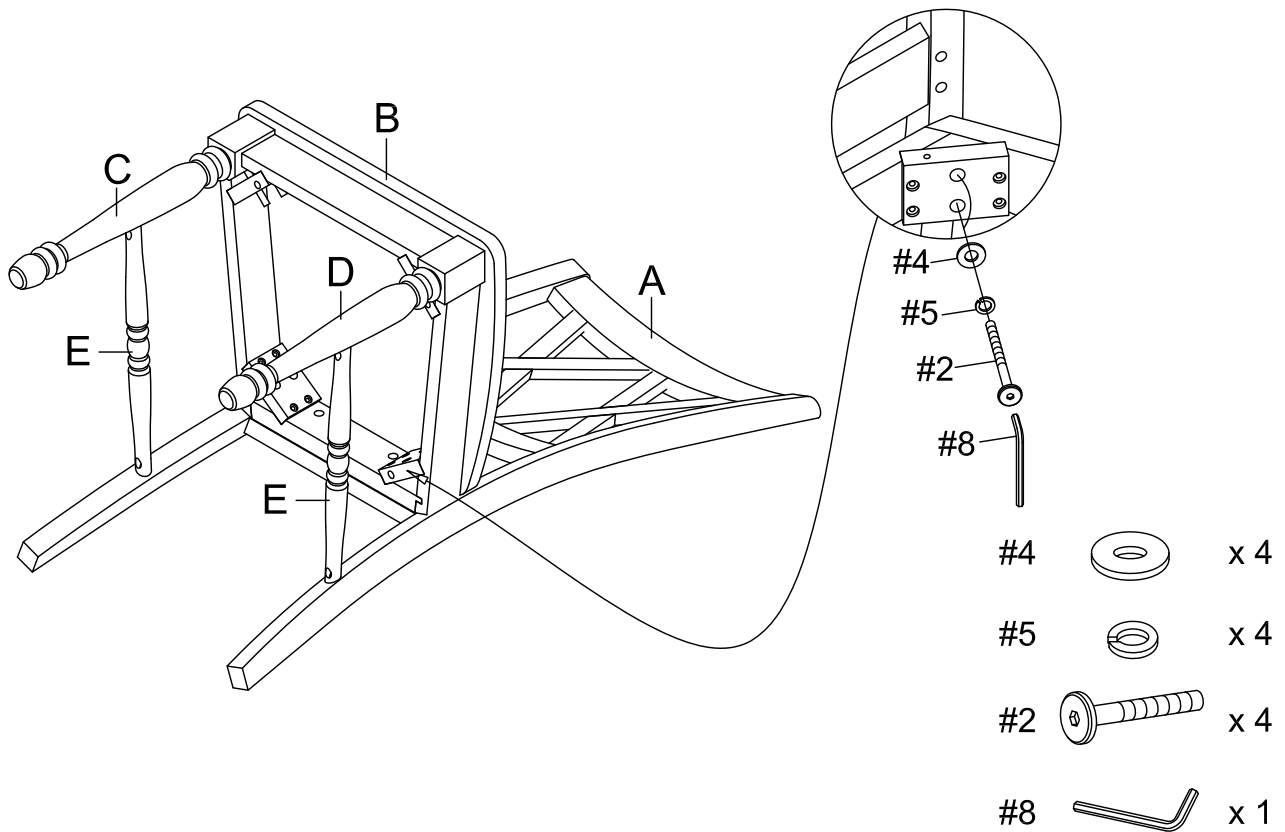

Step 4. Insert screws (part #3) into the holes of side stretchers (part #E) and tighten by a Phillips head screw driver.

Note: Please fully tighten all bolts at this time.

