



AmgoodSupply

Thank you for purchasing our product!

Issues with your order? Give us a chance to make things right.
Do not return this item back to the store. Contact our friendly customer
service department with any problems, comments or concerns.
Replacements for missing or damaged parts are shipped within 1 business day.

Email: **Support@AmGoodSupply.com**

Please check out our other products

Stainless Steel Work Tables
Equipment Stands
Stainless Steel Shelves
Commercial & Utility Sinks
Bakery Racks
Hood Filters
Storage Shelving
Utility Carts
Dunnage Rack
Commercial Floor Strainers
Grease Traps




AmGood Supply is a leading manufacturer and distributor of stainless steel and metal products for commercial and residential applications.


Our customers include homeowners, restaurants, retail and manufacturing businesses, non-profits, as well as state, local, and federal government agencies.

WWW.AMGOODSUPPLY.COM


Double OverShelf Assembly Instruction

Accessories


A. L-Bracket  2 PCS	B. Pipe  6 PCS	C. M8*1*10 Screw  18 PCS	D. Shelf Panel  1 PCS	E. Shelf Panel  1 PCS	F. I-Bracket  2 PCS
---	--	--	---	---	---

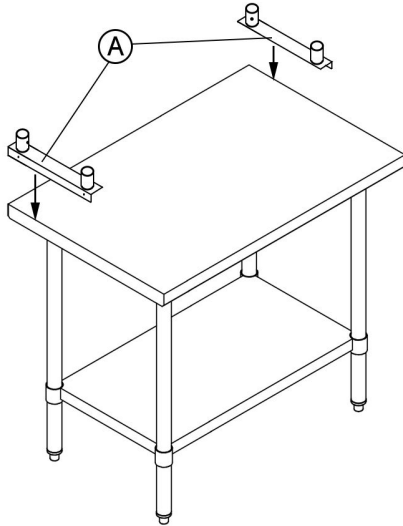


1. Position the two L-brackets (A) against the back of the table. Pre-drill holes through the sides of the tabletop to accommodate the screws. Secure the L-brackets to the table using screws (not provided).

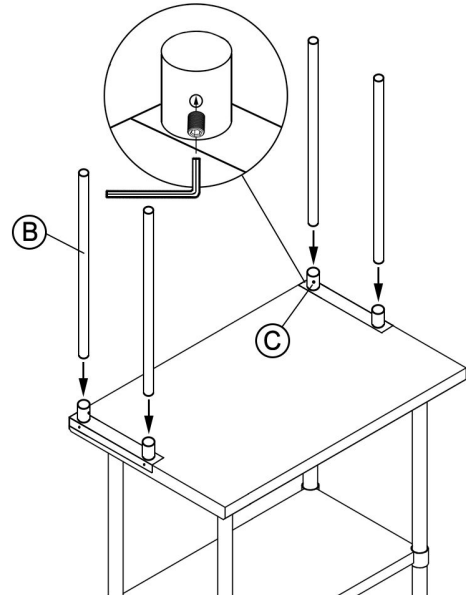

2. Secure the four legs (B) to the L-brackets using the Allen wrench and set screws (C) provided.

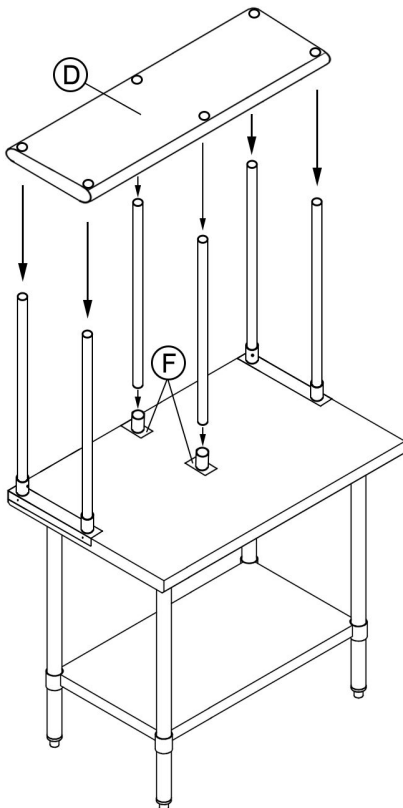

3. Measure and mark the desired height for the lower shelf on the left and right uprights. The shelf height can be adjusted later if needed. Slide the lower shelf (D) into place and once the shelf is positioned correctly, use the provided set screws and Allen wrench to tighten it securely in place. If needed, secure the 2 brackets (F) to the table using screws

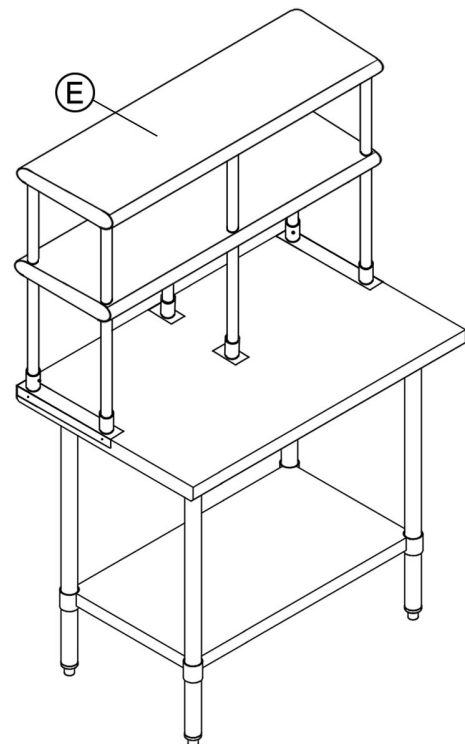

4. Place the over shelf top (E) onto the legs and secure them into the gussets using the set screws. If a set screw is difficult to insert, loosen it slightly before tightening it into place.