

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

# Whirl

## Round Multi Light 3000K

| Model & Size               | Color Temp & CRI               | Watt | Lumens | Finish   |
|----------------------------|--------------------------------|------|--------|----------|
| PD-19403R 8" - 3<br>Lights | 2<br>700K/3000K/3500K/4000K 90 | 63 W | 2897   | BK Black |

Example: **PD-19403R-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION


Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

### FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

|               |                                     |
|---------------|-------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K             |
| Input:        | 120/277V, 50/60Hz                   |
| CRI:          | 90                                  |
| Dimming:      | ELV: 100-10% , TRIAC: 100-5%        |
| Rated Life:   | 50000 Hours                         |
| Standards:    | ETL, cETL<br>Damp Location Listed   |
| Construction: | Aluminum body with silicon diffuser |




### FINISHES:



Black

### LINE DRAWING:

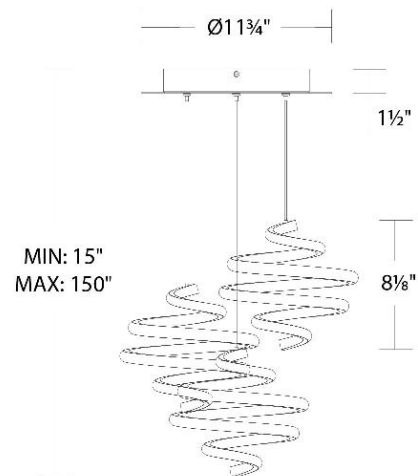

PD-19403R

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Whirl

## Round Multi Light 3000K

| Model & Size               | Color Temp & CRI               | Watt  | Lumens | Finish   |
|----------------------------|--------------------------------|-------|--------|----------|
| PD-19405R 8" - 5<br>Lights | 2<br>700K/3000K/3500K/4000K 90 | 101 W | 4621   | BK Black |

Example: **PD-19405R-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION


Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

### FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

|               |                                     |
|---------------|-------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K             |
| Input:        | 120/277V, 50/60Hz                   |
| CRI:          | 90                                  |
| Dimming:      | ELV: 100-10% , TRIAC: 100-5%        |
| Rated Life:   | 50000 Hours                         |
| Standards:    | ETL, cETL<br>Damp Location Listed   |
| Construction: | Aluminum body with silicon diffuser |




### FINISHES:



Black

### LINE DRAWING:

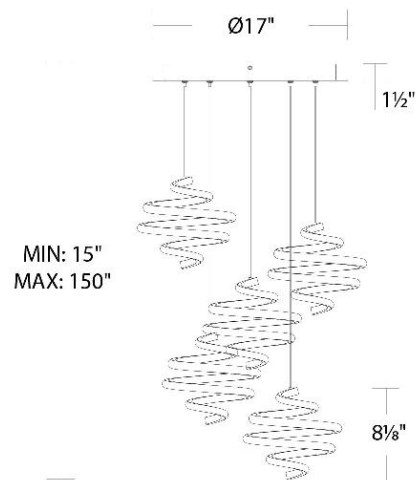

PD-19405R

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

# Whirl

## Round Multi Light 3000K

| Model & Size                | Color Temp & CRI               | Watt  | Lumens | Finish   |
|-----------------------------|--------------------------------|-------|--------|----------|
| PD-19409R 8" - 9"<br>Lights | 2<br>700K/3000K/3500K/4000K 90 | 187 W | 8318   | BK Black |

Example: **PD-19409R-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION


Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

### FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

|               |                                     |
|---------------|-------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K             |
| Input:        | 120/277V, 50/60Hz                   |
| CRI:          | 90                                  |
| Dimming:      | ELV: 100-10%, TRIAC: 100-5%         |
| Rated Life:   | 50000 Hours                         |
| Standards:    | ETL, cETL<br>Damp Location Listed   |
| Construction: | Aluminum body with silicon diffuser |




### FINISHES:



Black

### LINE DRAWING:

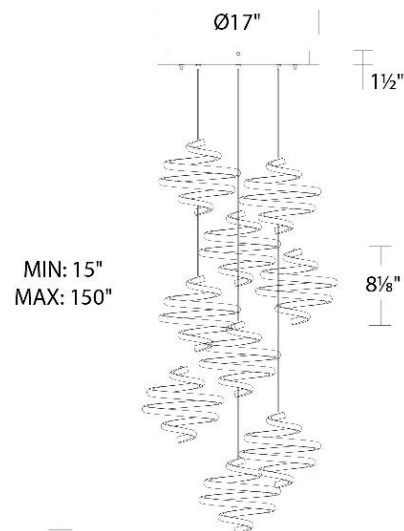

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Whirl

## Round Multi Light 3000K

| Model & Size             | Color Temp & CRI               | Watt  | Lumens | Finish   |
|--------------------------|--------------------------------|-------|--------|----------|
| PD-19415R 8" - 15 Lights | 2<br>700K/3000K/3500K/4000K 90 | 315 W | 13556  | BK Black |

Example: **PD-19415R-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

### FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

|               |                                     |
|---------------|-------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K             |
| Input:        | 120/277V,50/60Hz                    |
| CRI:          | 90                                  |
| Dimming:      | ELV: 100-10% , TRIAC: 100-5%        |
| Rated Life:   | 50000 Hours                         |
| Standards:    | ETL, cETL                           |
|               | Damp Location Listed                |
| Construction: | Aluminum body with silicon diffuser |




### FINISHES:



Black

### LINE DRAWING:

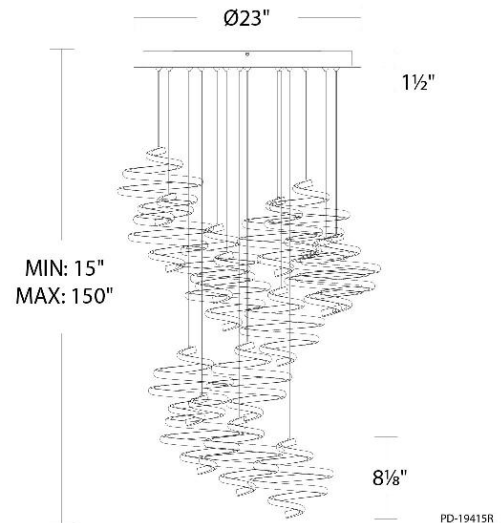

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Whirl

## Round Multi Light 3000K

| Model & Size             | Color Temp & CRI               | Watt  | Lumens | Finish   |
|--------------------------|--------------------------------|-------|--------|----------|
| PD-19421R 8" - 21 Lights | 2<br>700K/3000K/3500K/4000K 90 | 439 W | 18142  | BK Black |

Example: **PD-19421R-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION


Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

### FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

|               |                                     |
|---------------|-------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K             |
| Input:        | 120/277V,50/60Hz                    |
| CRI:          | 90                                  |
| Dimming:      | ELV: 100-10% ,TRIAC: 100-5%         |
| Rated Life:   | 50000 Hours                         |
| Standards:    | ETL, cETL<br>Damp Location Listed   |
| Construction: | Aluminum body with silicon diffuser |



### FINISHES:



Black

### LINE DRAWING:

