



36*84 inch Hidden Barn Door Installation Manual

Any question please contact us :
support@jubest.com












YCM12-36x84IN+HD

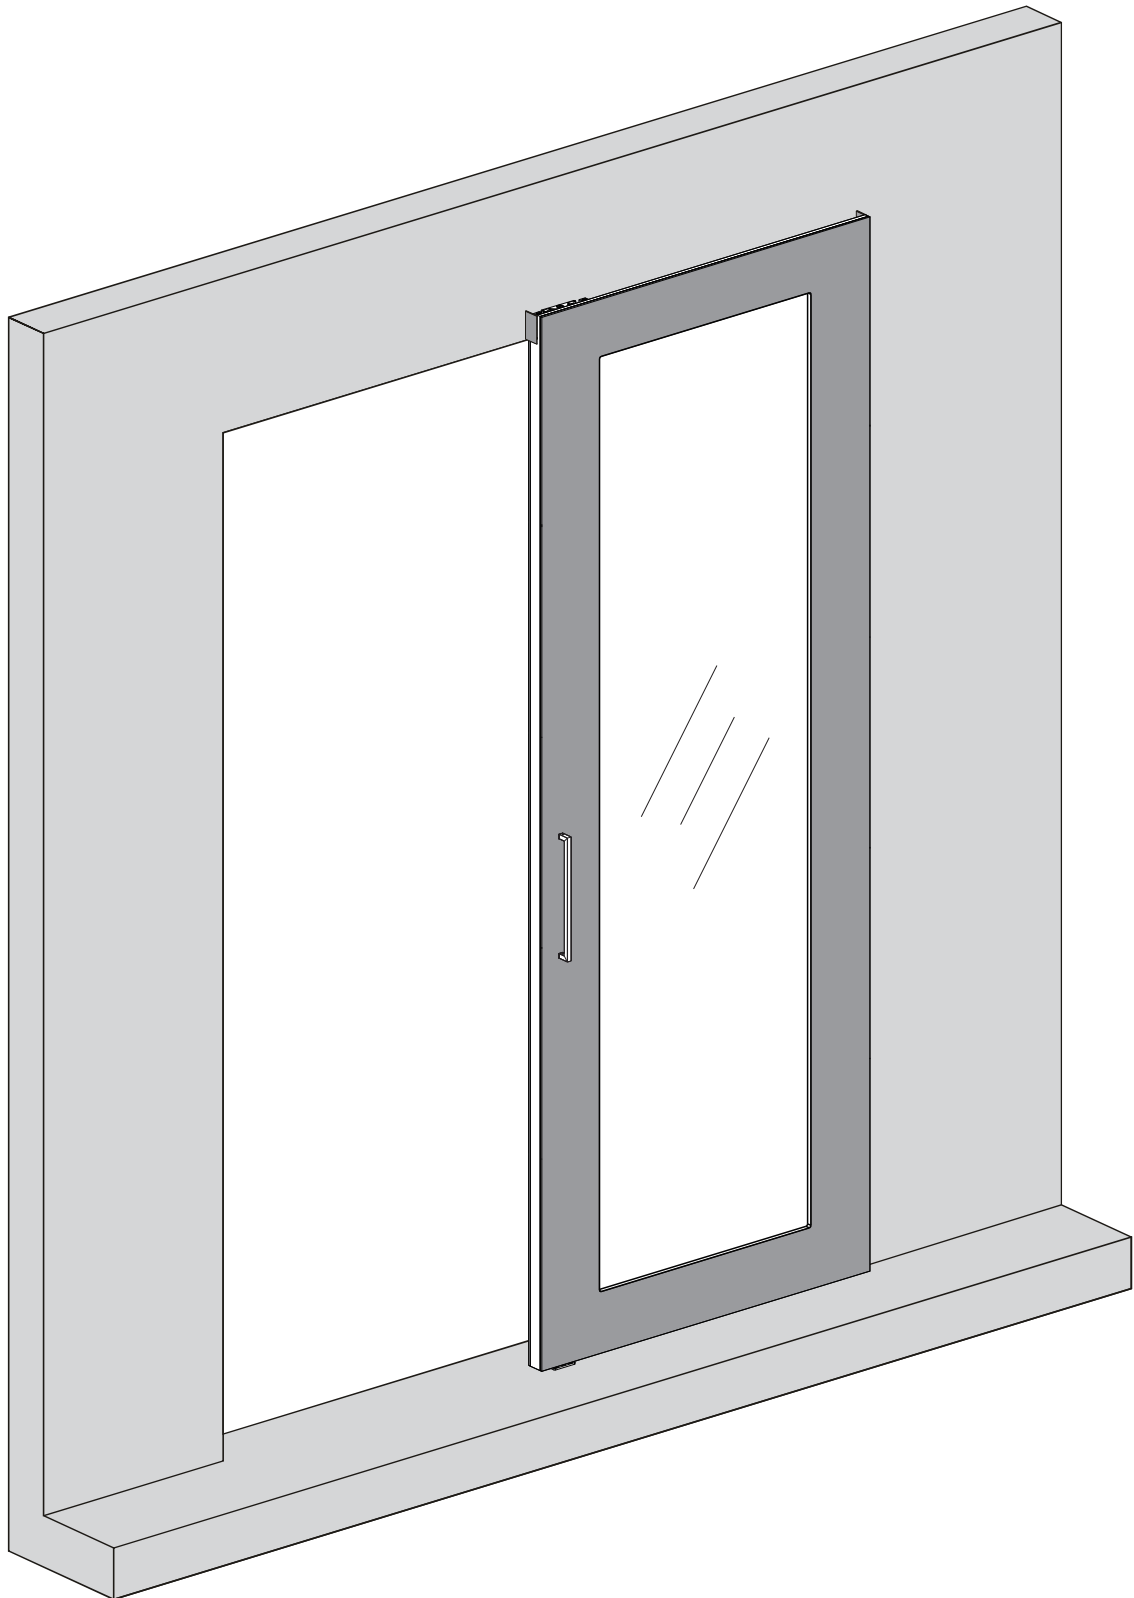

TOOLS REQUIRED

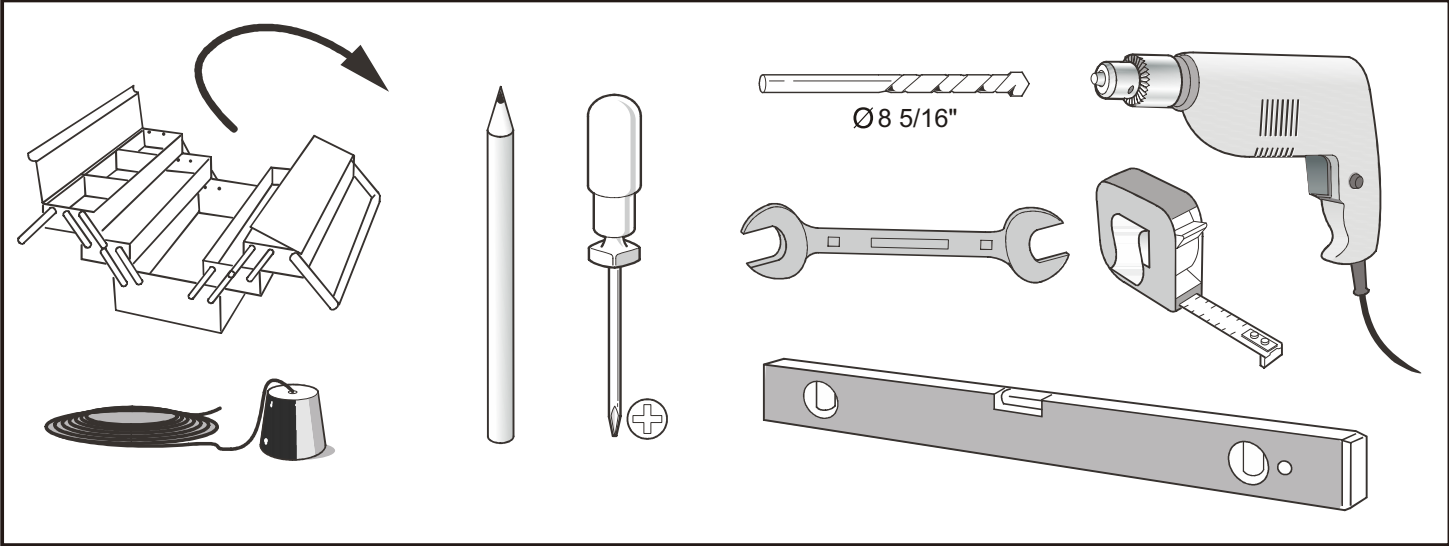


WHAT IS IN THE BOX

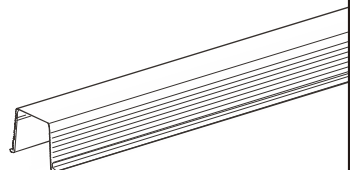A Adjustable top roller  (x1)  (x4) ST 11/64"x1 31/32" (4.2mmx50mm)  (x4) Ø 5/16" (8mm)	B Soft close kits  Left(x1)  Right(x1)	C Sliding track  (x1)  (x9) ST 9/64"x33/64" (3.5mmx13mm)	D End caps for track  (x1)  (x1)  (x2) ST 7/64"x3/8" (2.9mmx9.5mm)
E Bottom roller  (x2)  (x4) ST 11/64"x63/64" (4.2mmx25mm)	F Bottom guide channel  (x1)	G Floor mounted guide  (x1)  (x2) ST 3/16"x1 1/2" (4.8mmx38mm)  (x2) Ø 5/16" (8mm)	H Flush pull  (x1)  (x1)  (x2) ST 7/32"x63/64" (5.5mmx25mm)  (x2) ST 11/64"x1 1/4" (4.2mmx31.7mm)
I Spacer  (x1)	J Door slab  (x1) 36"x84" (914mmx2134mm)	 (x1)	

Door opened position


Door closed position

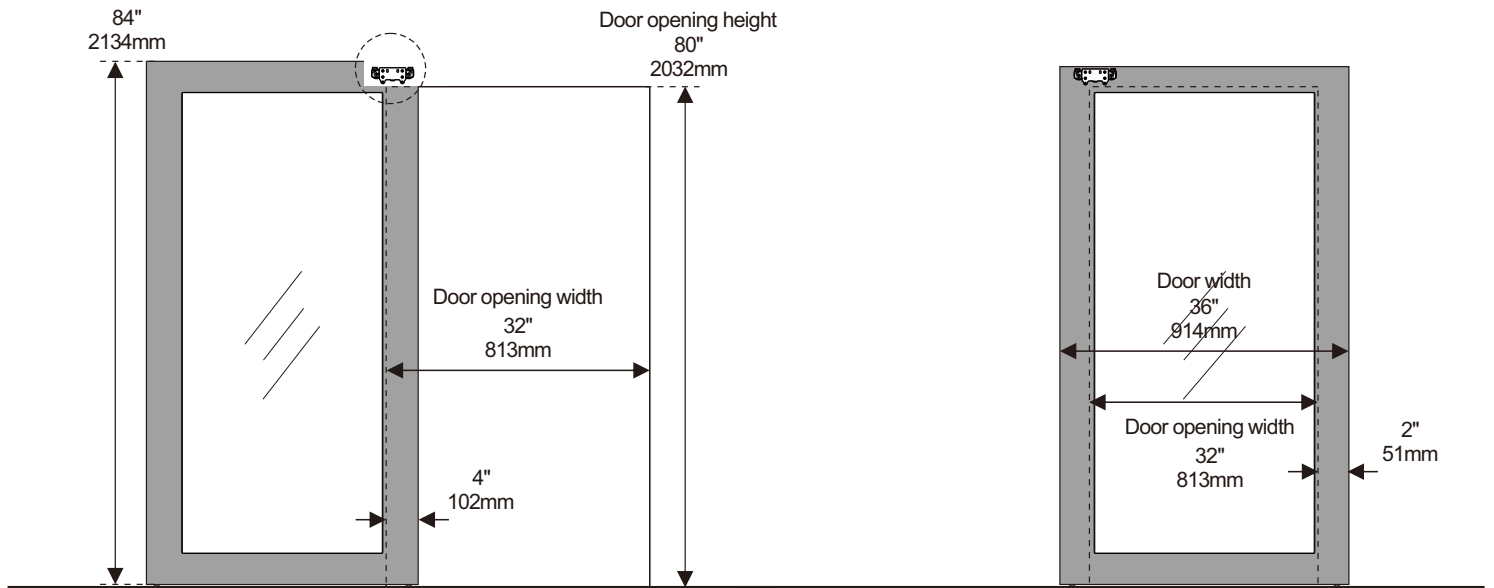


fits 32*80 or 34*80 inch door opening, please consult with us before installation if you have other sizes of door opening

Door opened position


Door closed position

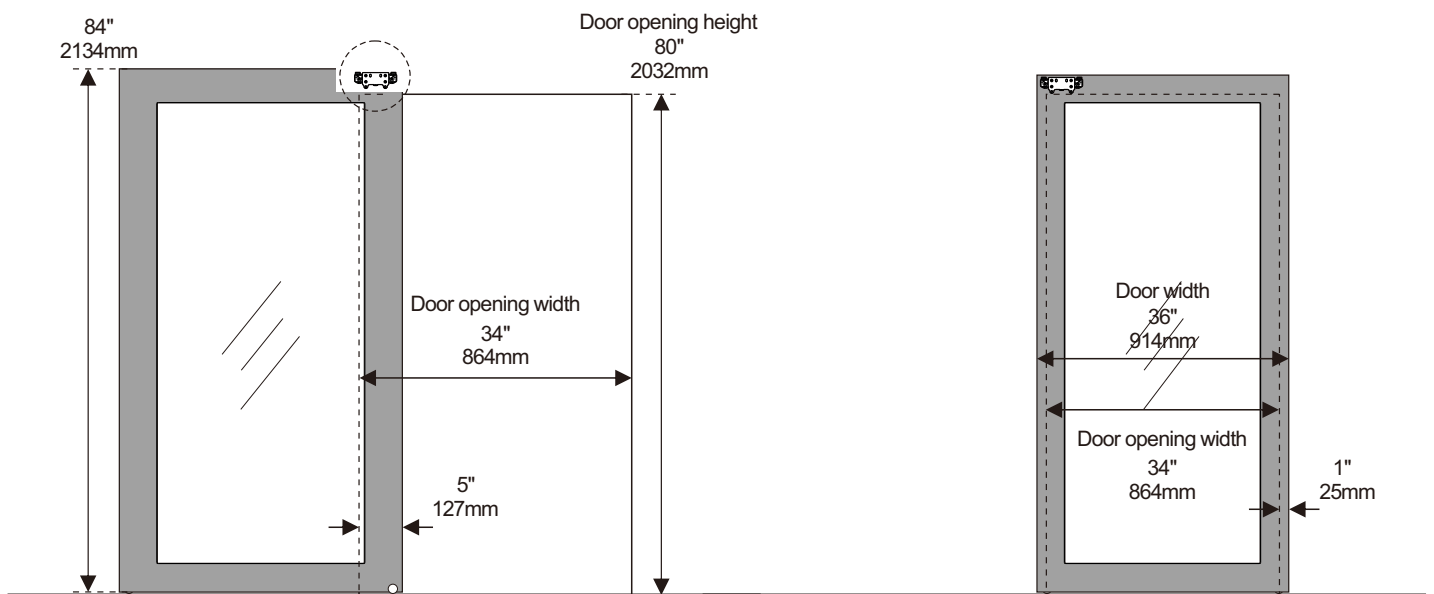

Section drawing

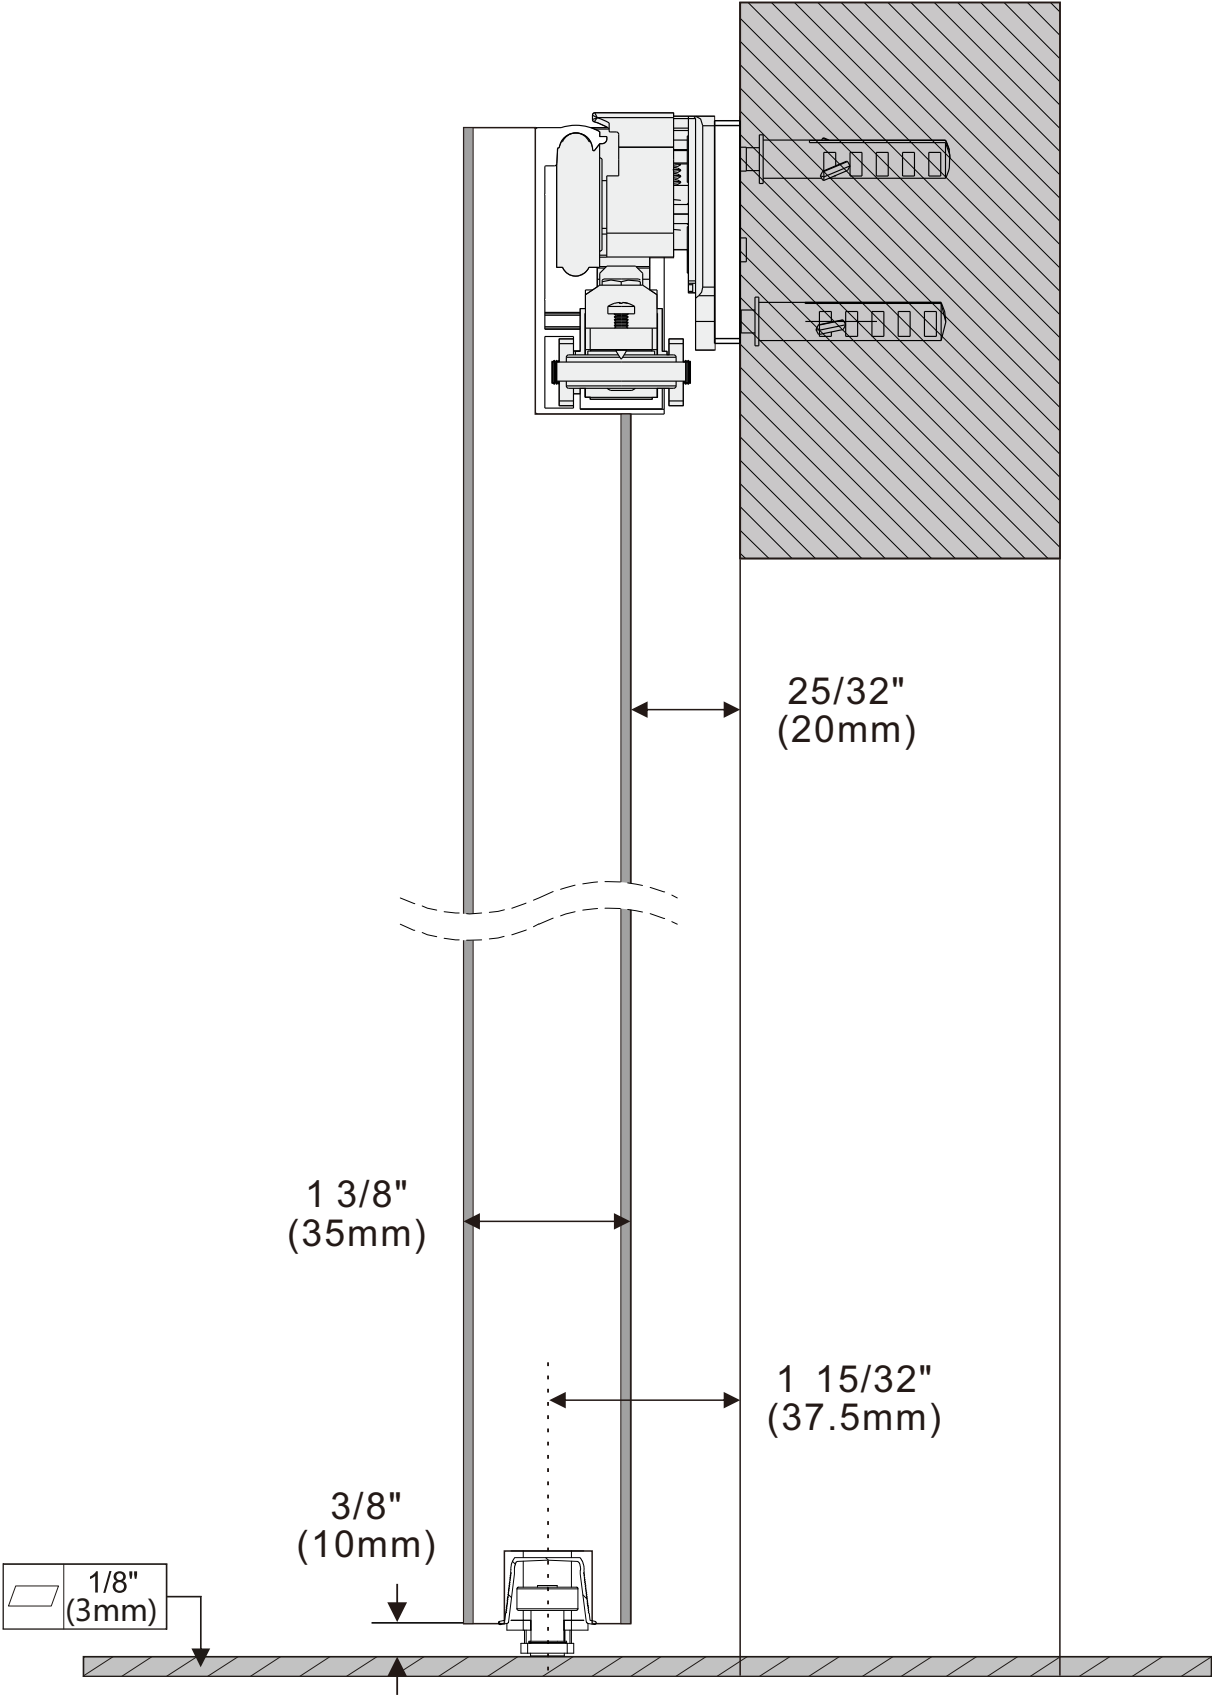


1 Mount aluminum track (C) on door (J)

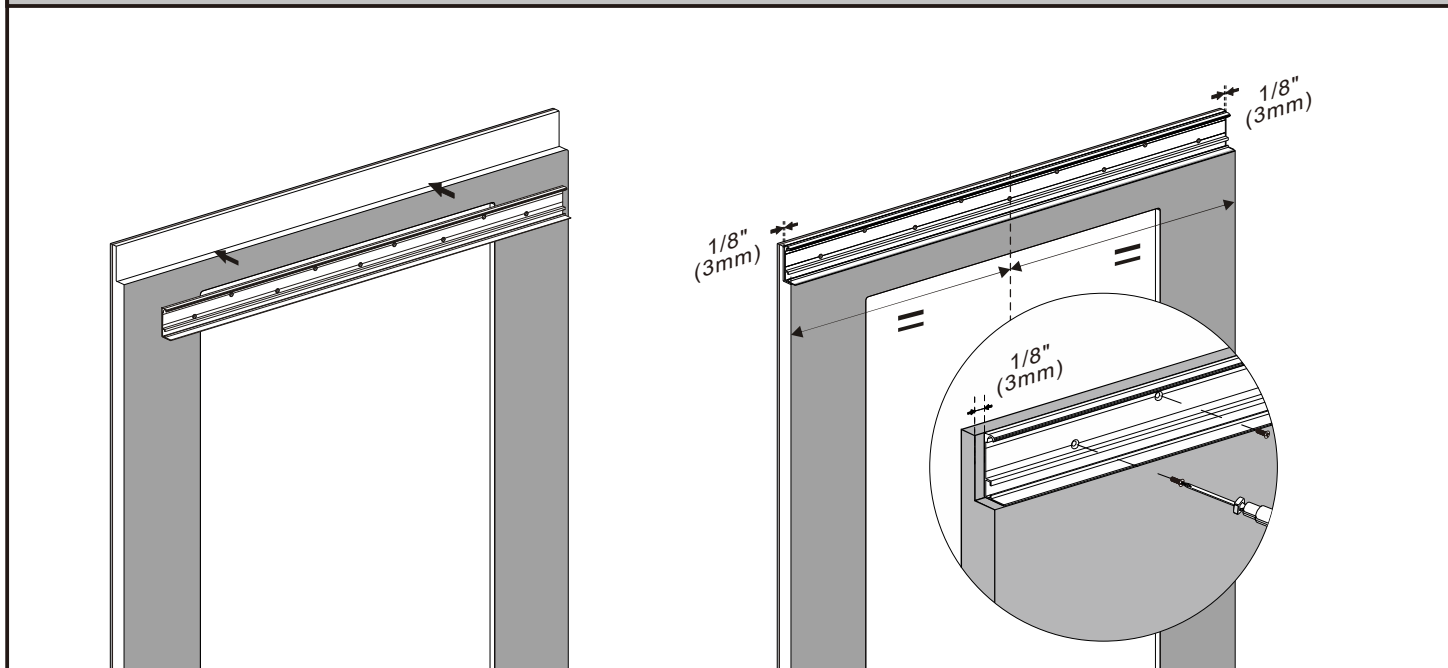


2 Mount soft close kits(B)


① Activate soft close devices by hand

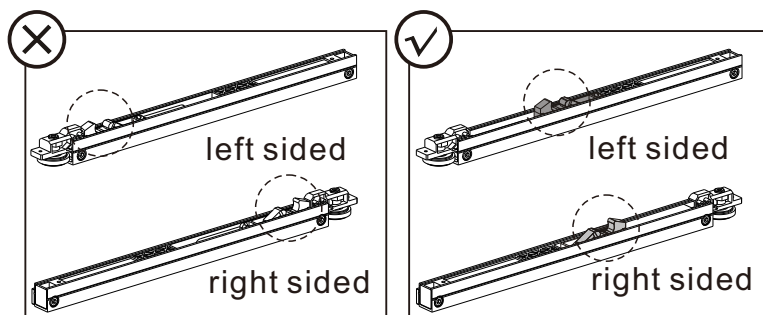


② Loosen screw on both ends of soft close device

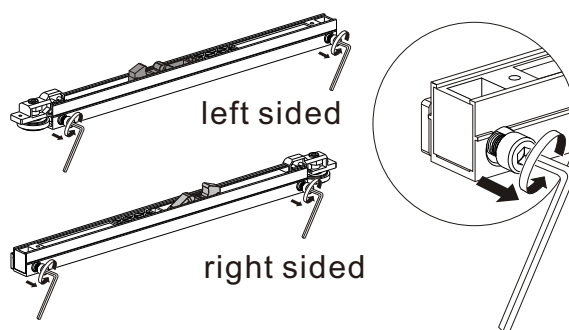


③ Slide both left sided and right sided soft close devices in the track (C)

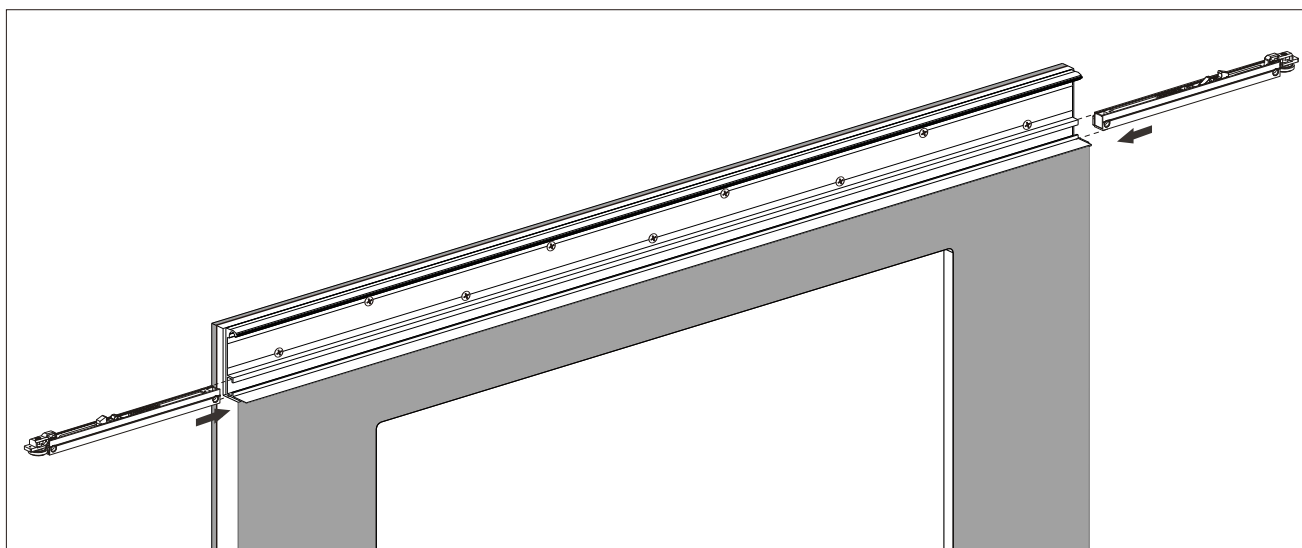

- ④ Ensure it is flush with the end of track(C) and fasten the screw

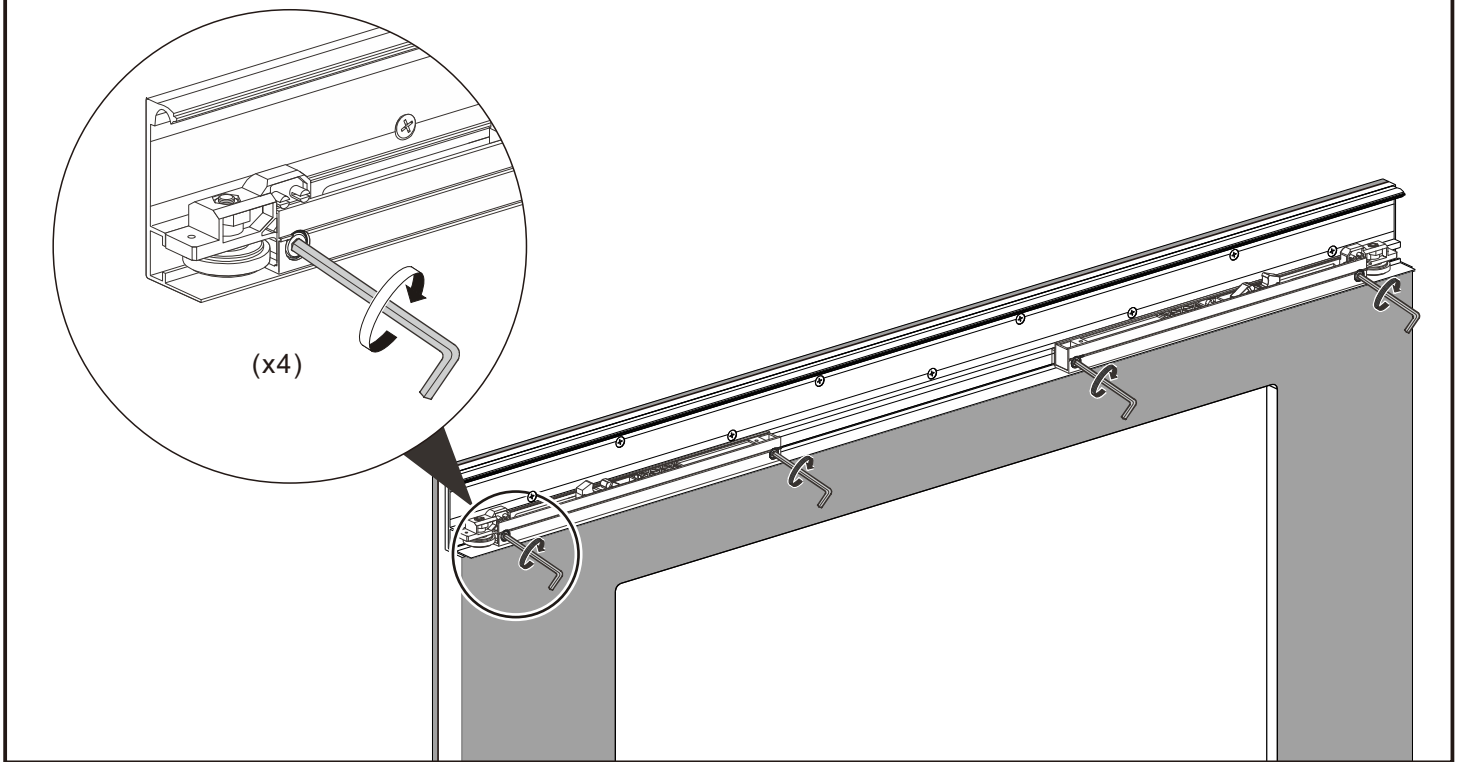


- 3 Fasten caps(D) onto both ends of track

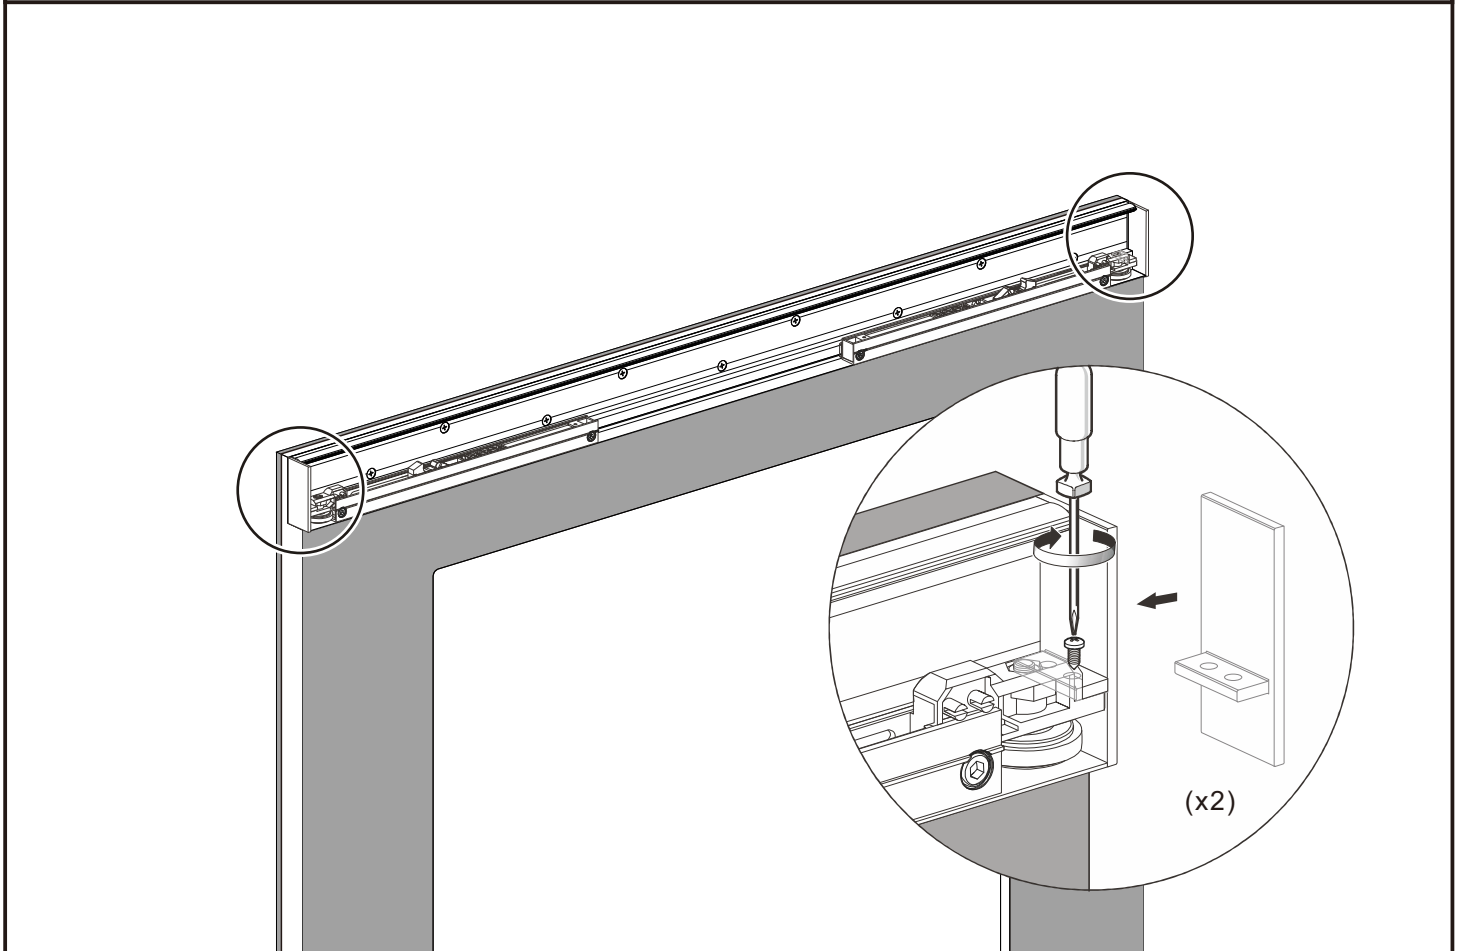


4 Install bottom roller(E) and guide channel(F) inside the slot of door slab(J)


① Remove the wheel from the case

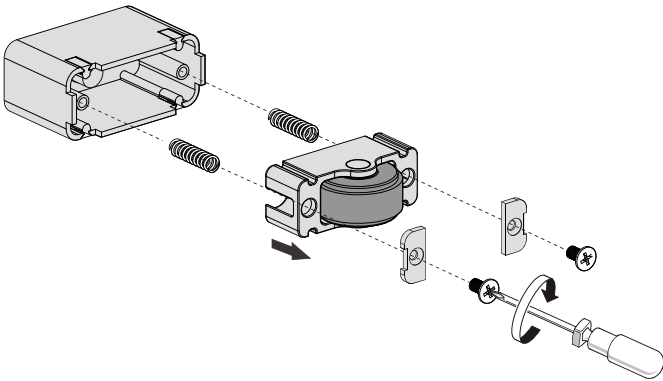


② Fasten bottom roller case inside the bottom of door slab

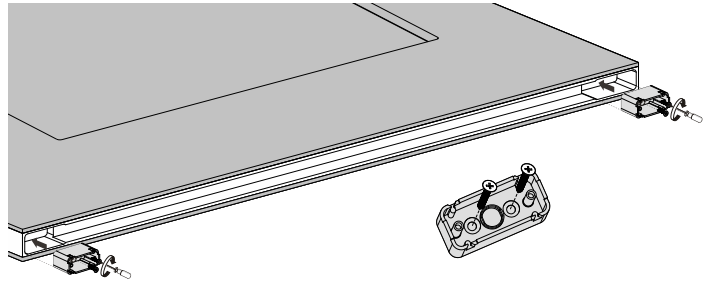

③ Fasten the wheel inside the case

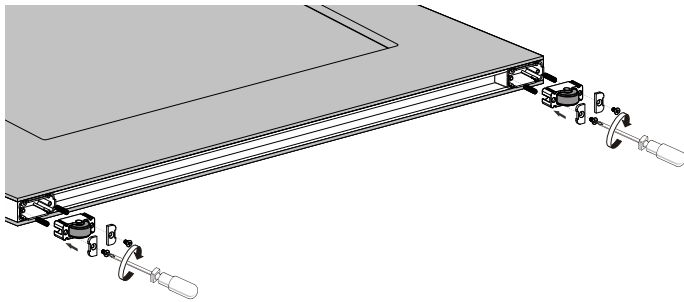


④ Press fit guide channel inside the slot

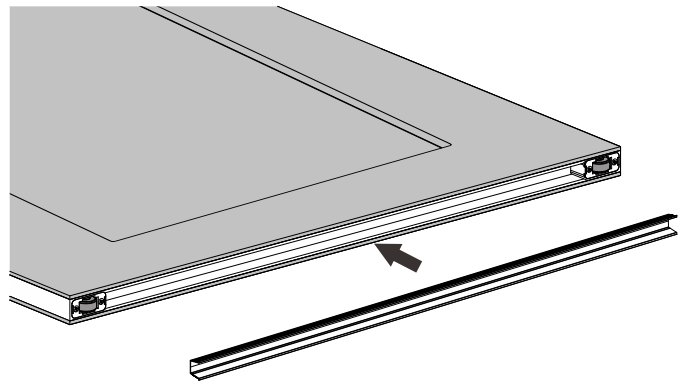




5 Mount adjustable top roller(A) and mount floor guide(G) NOTE: top roller assembly must be installed into wall blocking.

Door opening size:32x80"

① Loose the screw and remove anti-jump block

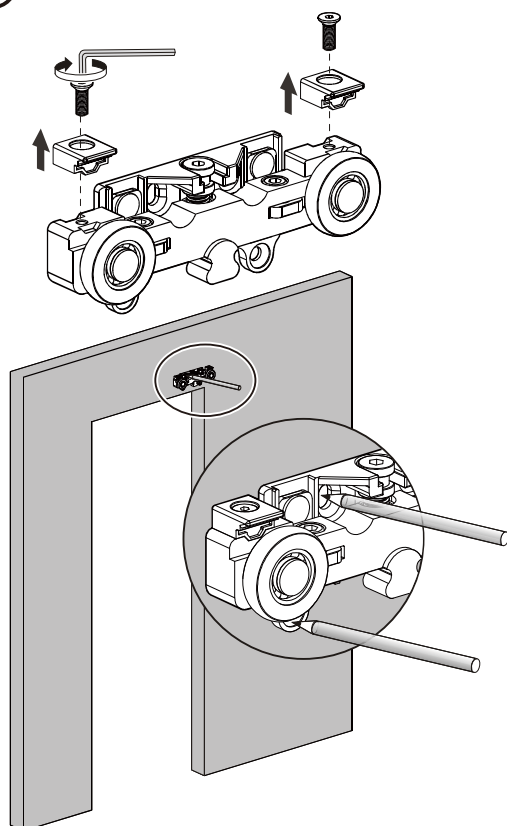


② Fasten the top roller onto wall through spacer(I)

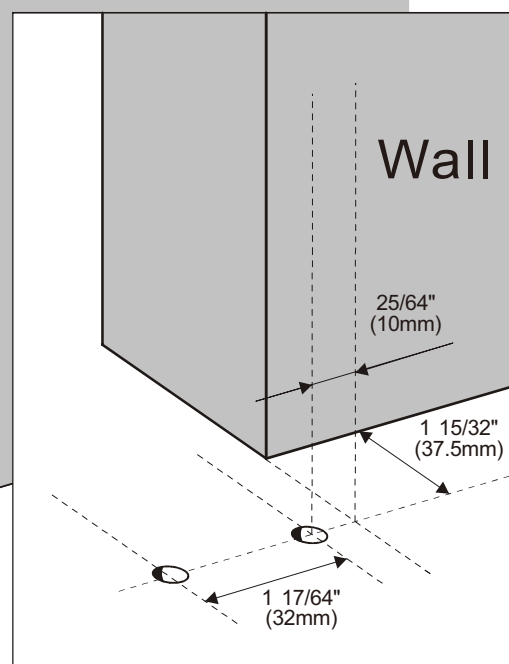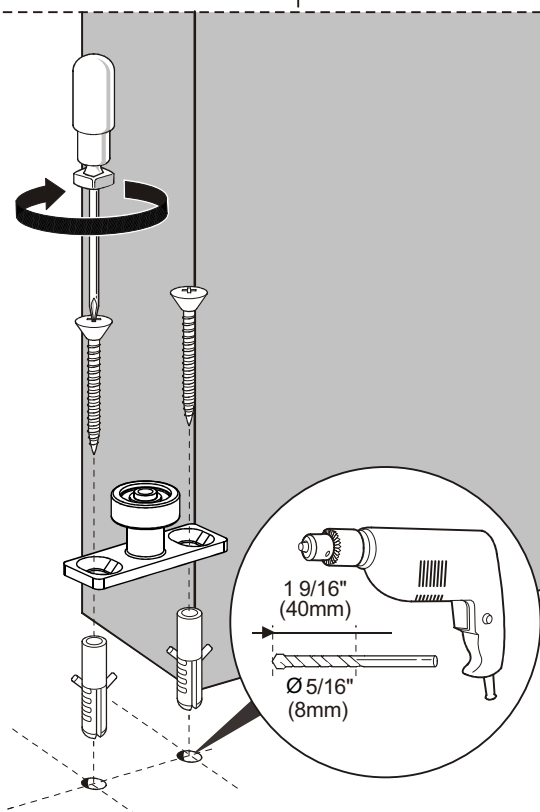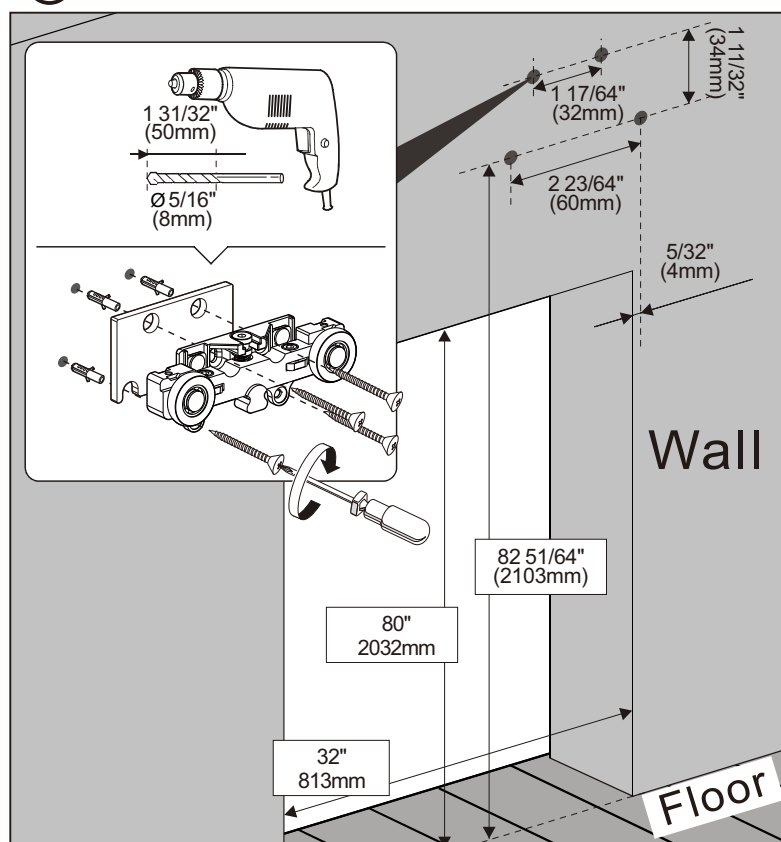




5 Mount adjustable top roller(A) and mount floor guide(G) NOTE: top roller assembly must be installed into wall blocking.

Door opening size:34x80"


① Loose the screw and remove anti-jump block

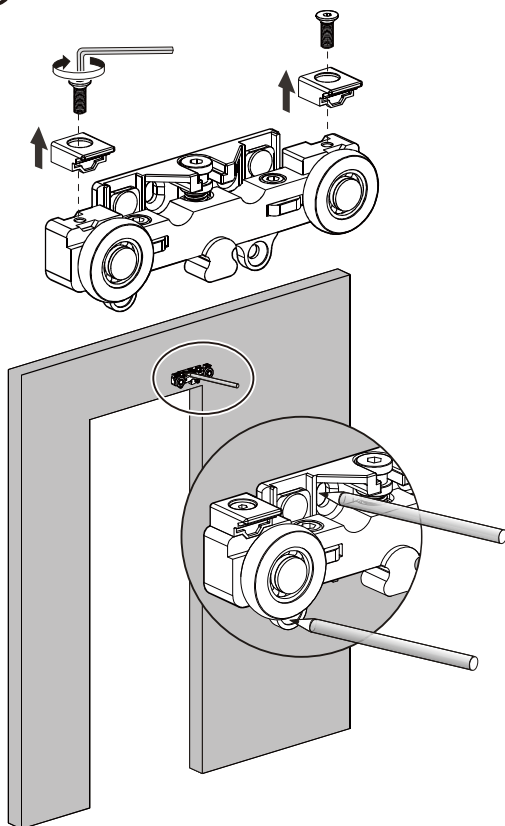


② Fasten the top roller onto wall through spacer(I)

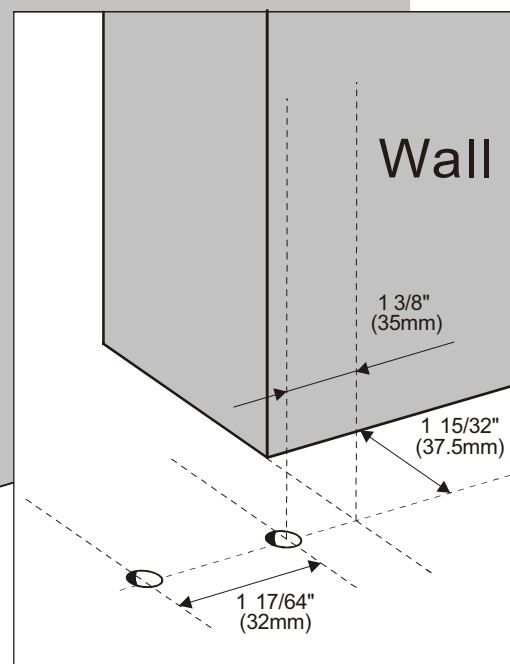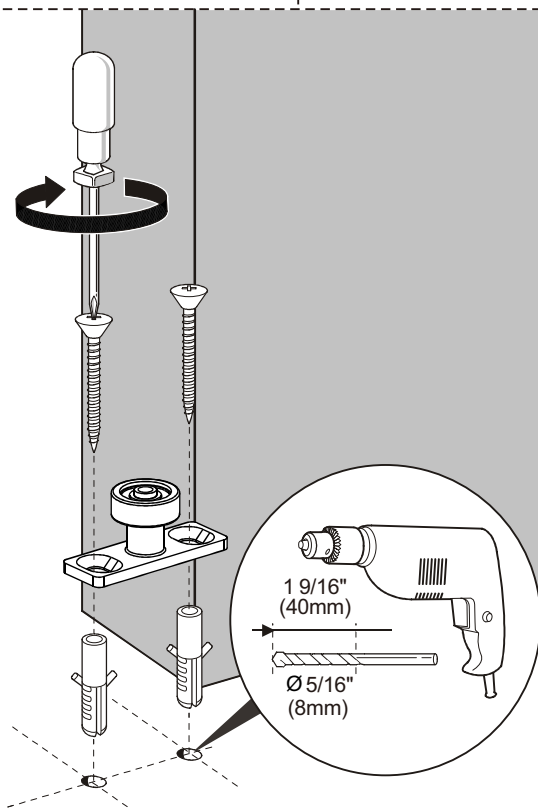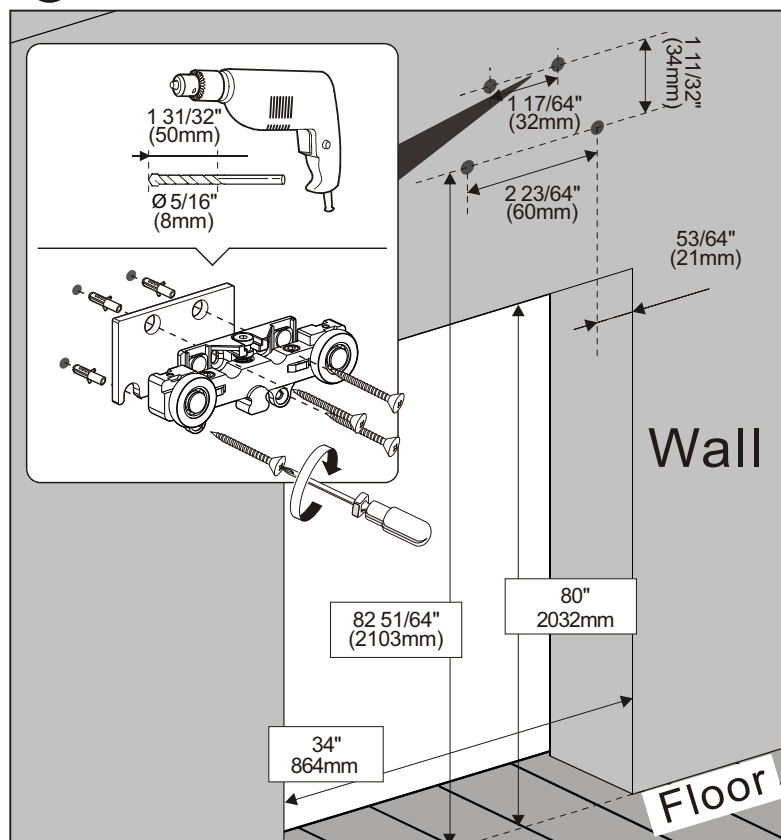


6 Install door slab(J) onto top track(C)
and slide the door slab to ensure top roller(A) is at the center of track(C) horizontally

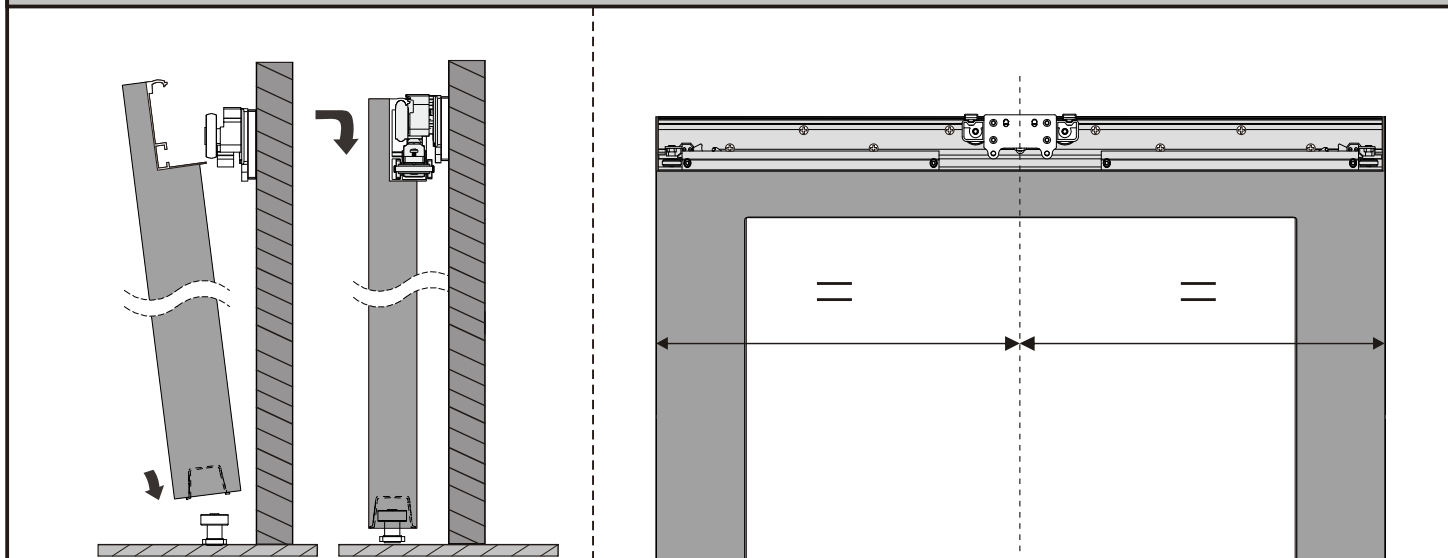

7 Fasten the screw to adjust the hanger height to ensure wheel touches the upper inside of track

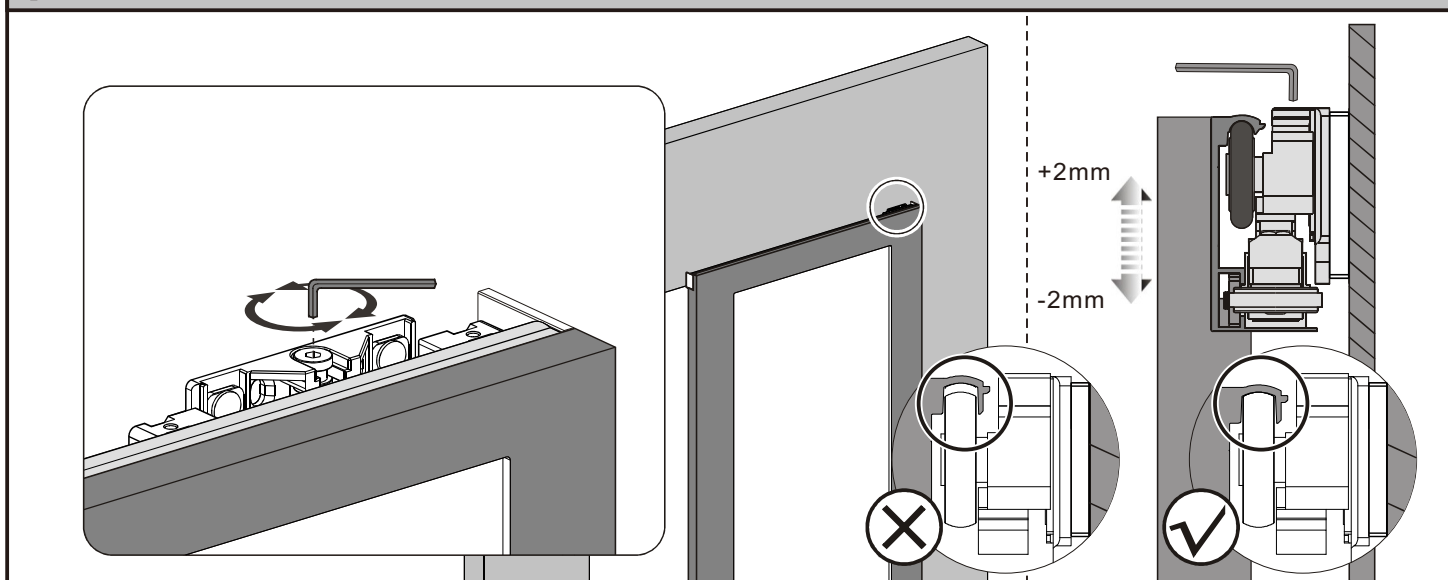


8 Tighten the anti-jump block



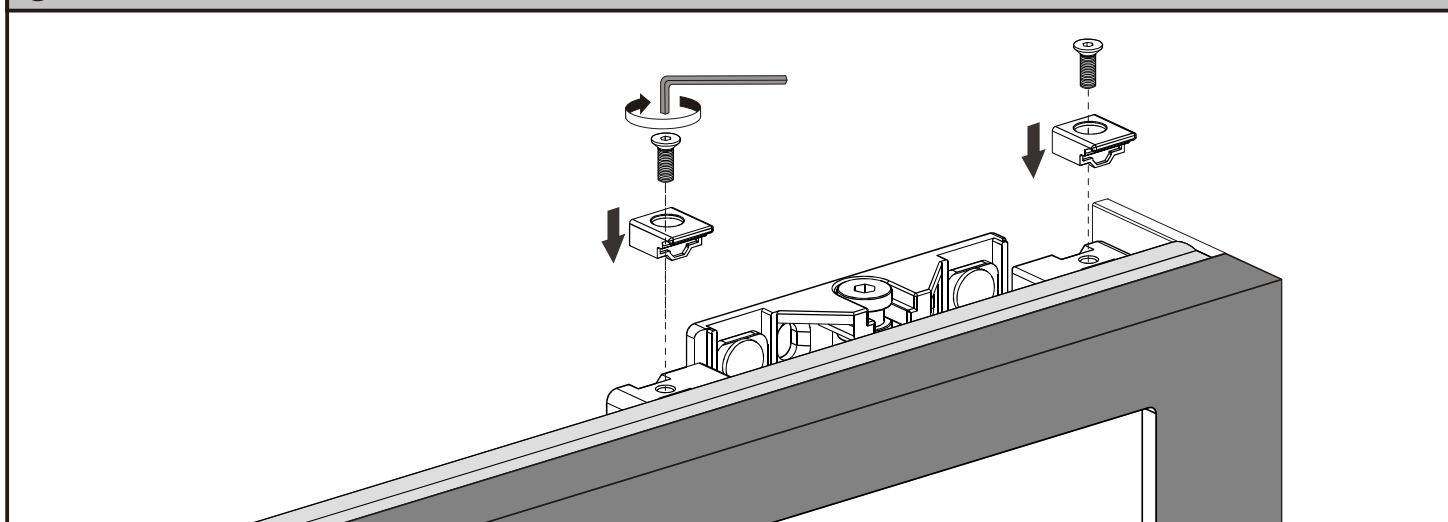


9

Slide the door slab both left and right to ensure actuator is in between the fin of soft close device

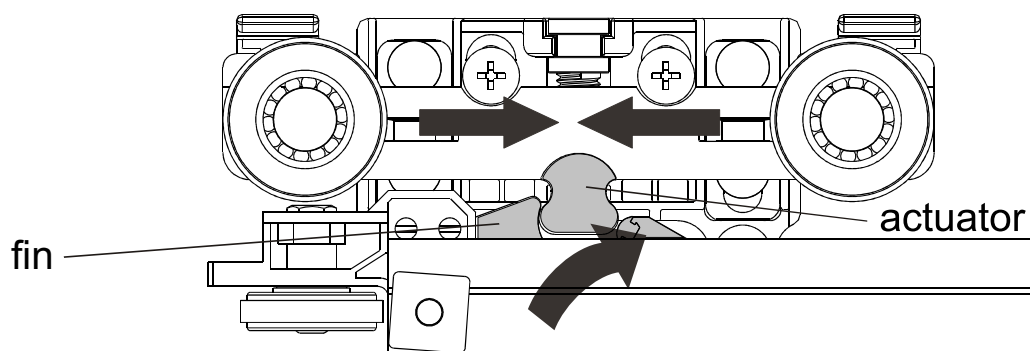**10**

Adjust the tightness of the screw to ensure door slab(J) is parallel with wall

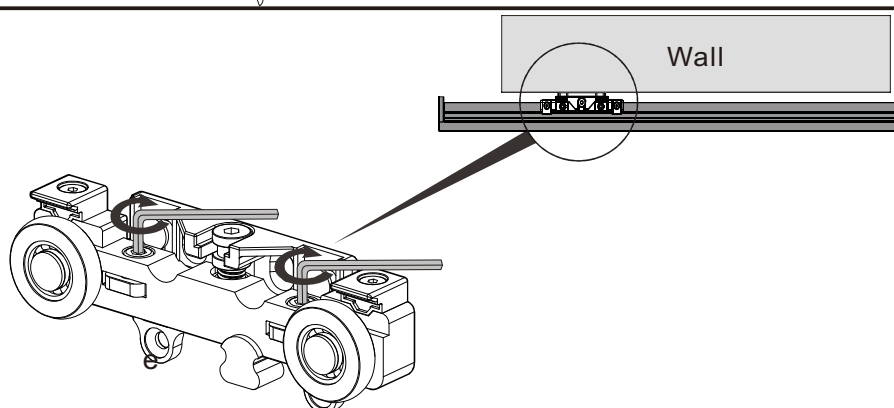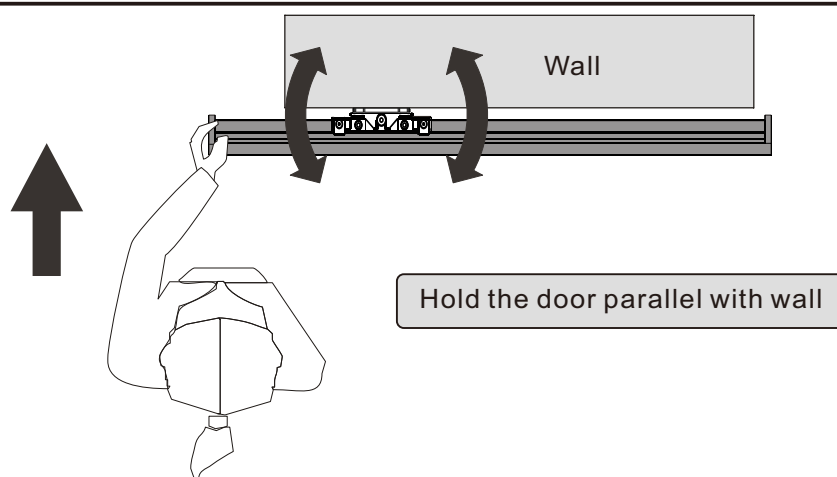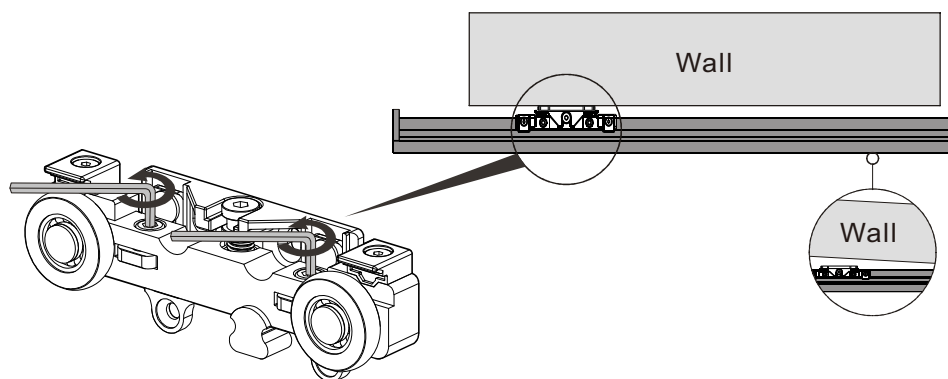

11 install flush pull(H) onto both sides of door slab(J)

