



# ASSEMBLY INSTRUCTION

ITEM S5683/S5684/S5685/S5686/S5687

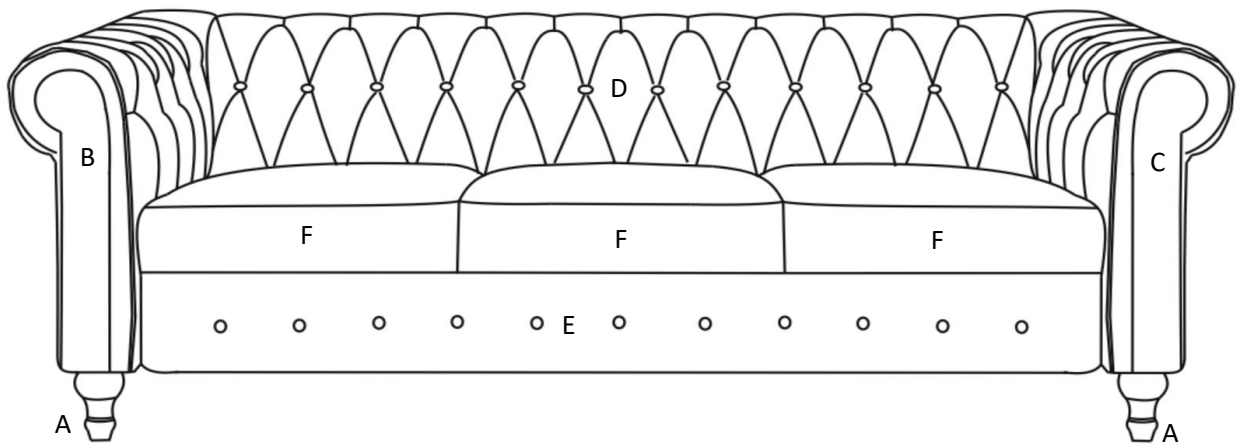


A: Legs 4PCS



B: Left arm 1PC



C: Right arm 1PC

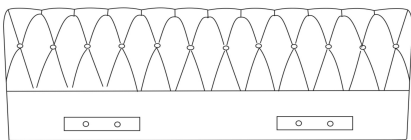


D: Back Rest 1PC



E: Front Board 1PC




F: Seat cushion 3PCS G: Base support 1PC H: Allen Key 1PC

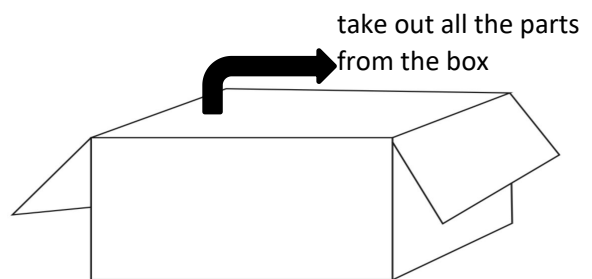


### STEP 1

Turn the legs A clockwise to fixed it on the both arm(B&C).

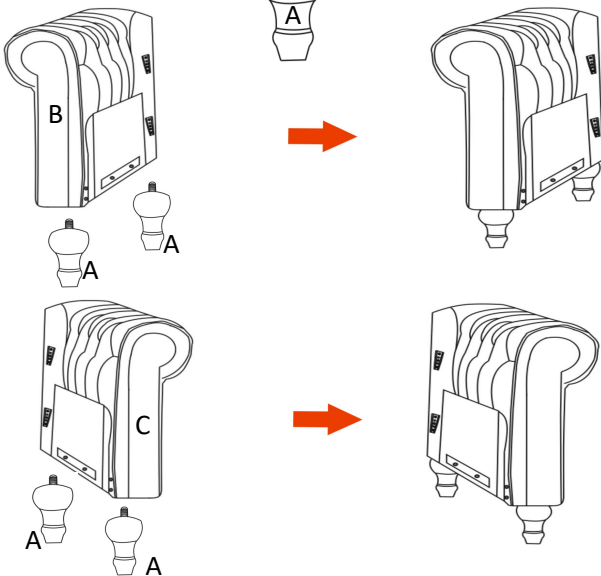


### STEP 2

Hook on the Back Rest (D) into Left Arm (B) and Right Arm (C) securely.

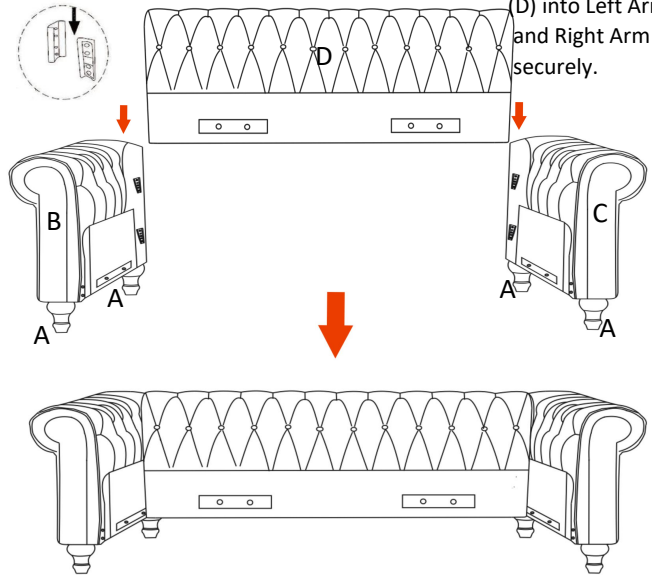


### STEP 3

Slightly loosen the four bolts using Allen Key(H) without removing the bolts completely from both Side Arms (B&C). Hook on Front Board (E) hooks into loosen bolts, once placed tighten and secure all four bolts with Allen Key (H)

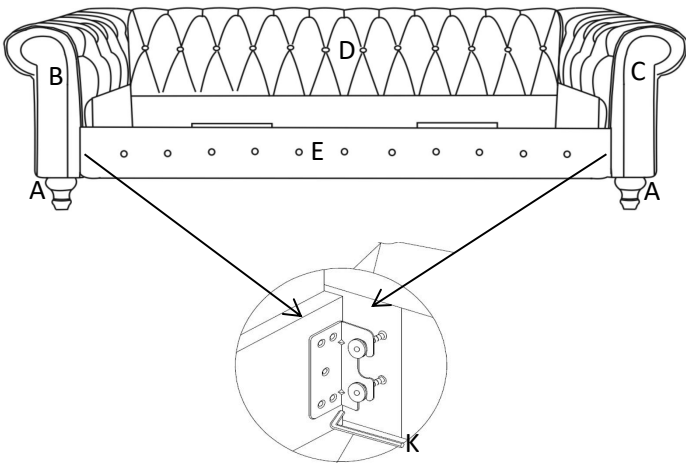


### STEP 4


① Put the Base support (G) into the sofa frame

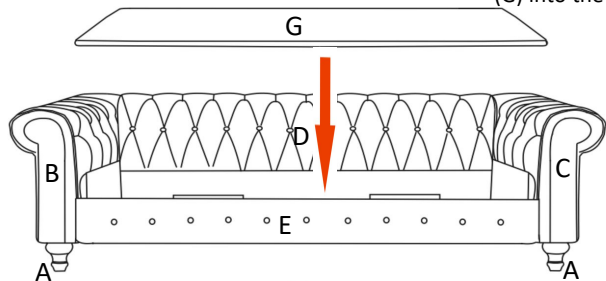

② Put the Seat cushion(F) on the Base Support(G)

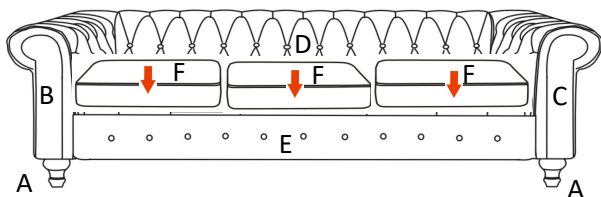


### STEP 5

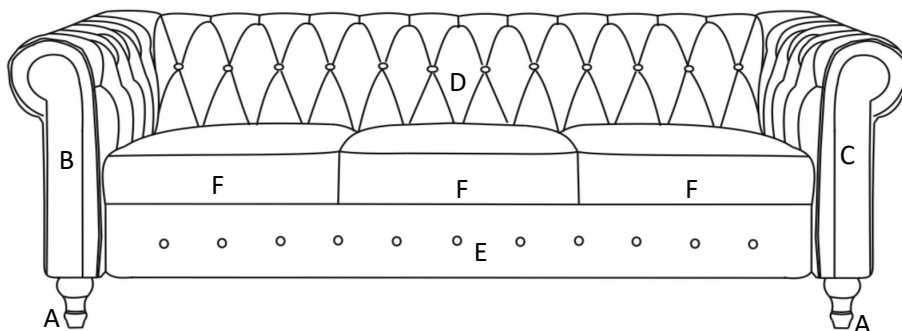


# ASSEMBLY INSTRUCTION

ITEM S5683/S5684/S5685/S5686/S5687

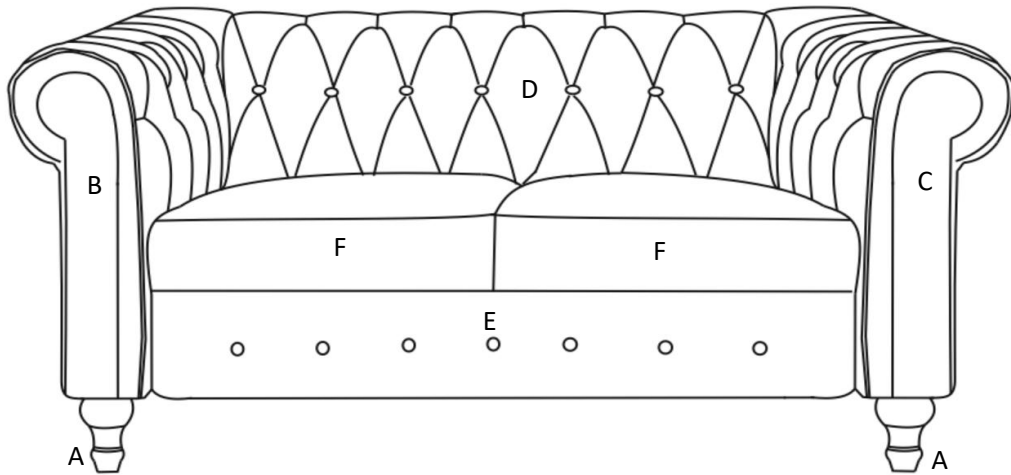


A:Legs 4PCS




B:Left arm 1PC



C:Right arm 1PC

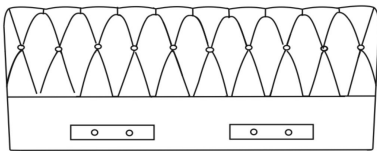

D:Back Rest 1PC




E:Front Board 1PC




F:Seat cushion 2PCS G: Base support 1PC H:Allen Key 1PC

take out all the parts  
from the box

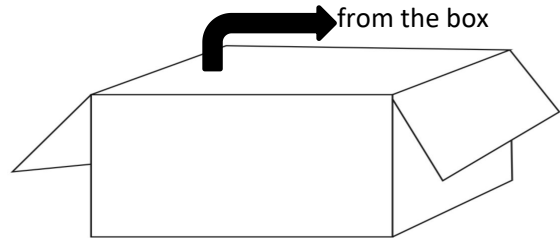


### STEP 1

Turn the legs A clockwise to fixed it on the both arm(B&C).

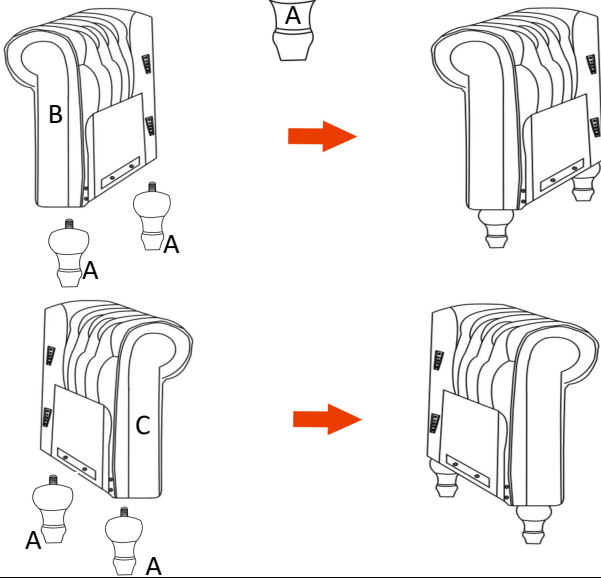


### STEP 2

Hook on the Back Rest (D) into Left Arm (B) and Right Arm (C) securely.

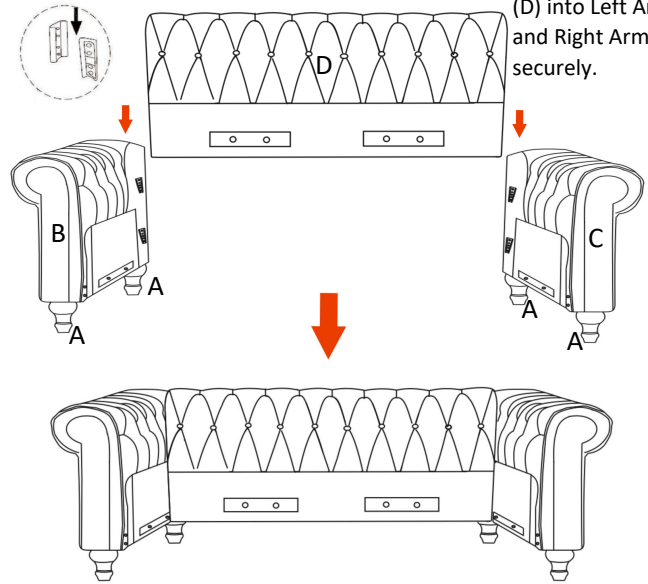


### STEP 3

Slightly loosen the four bolts using Allen Key(H) without removing the bolts completely from both Side Arms (B&C). Hook on Front Board (E) hooks into loosen bolts, once placed tighten and secure all four bolts with Allen Key (H)

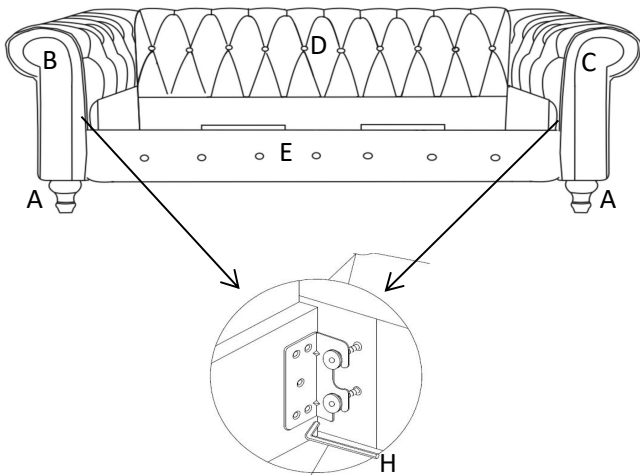


### STEP 4


① Put the Base support (G) into the sofa frame

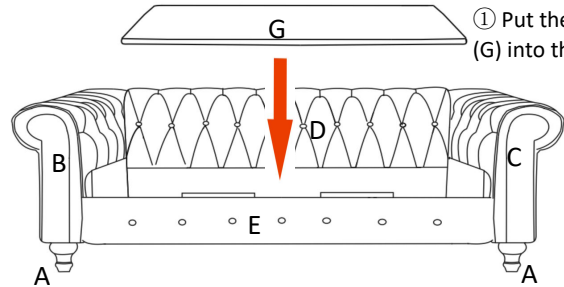

② Put the Seat cushion(F) on the Base Support(G)

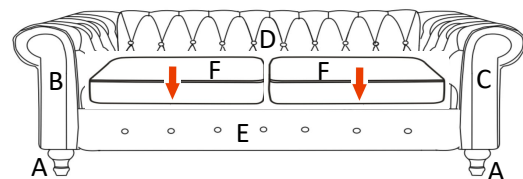


### STEP 5

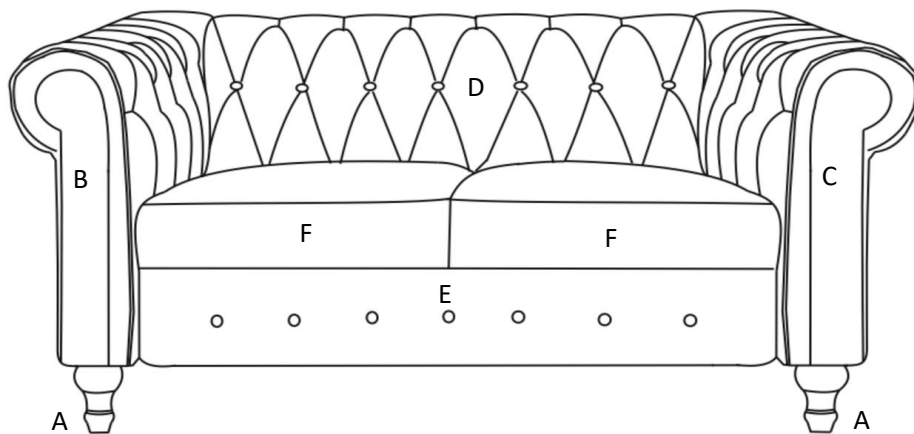

# ASSEMBLY INSTRUCTION

ITEM S5683/S5684/S5685/S5686/S5687

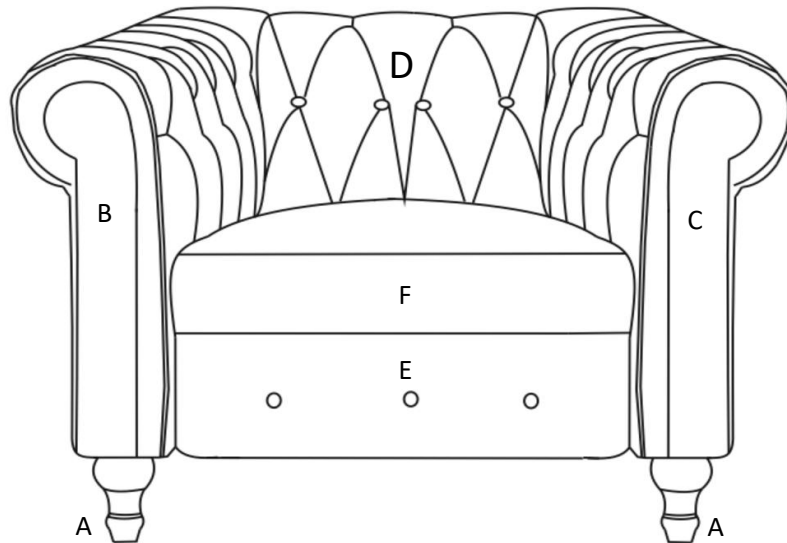


A:Legs 4PCS



B:Left arm 1PC




C:Right arm 1PC



D:Back Rest 1PC



E:Front Board 1PC




F:Seat cushion 1PC



G: Base support 1PC




H:Allen Key 1PC

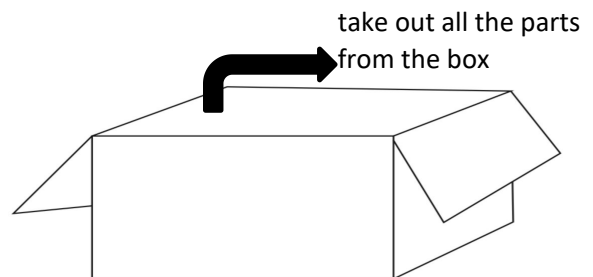


### STEP 1

Turn the legs (A) clockwise to fixed it on the both arm(B&C).

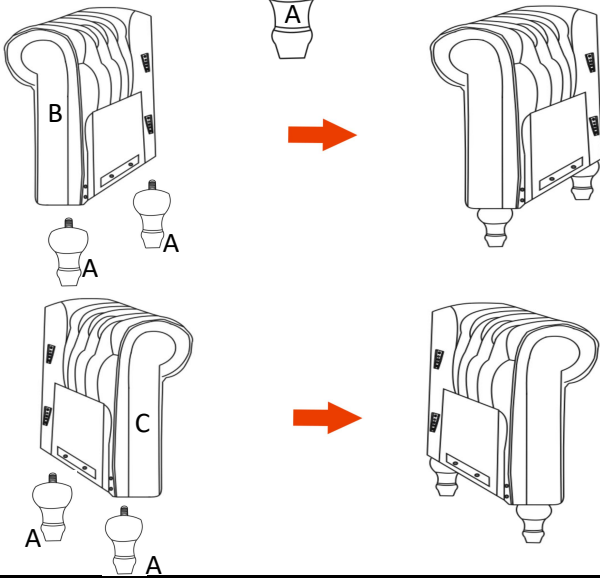


### STEP 2

Hook on the Back Rest (D) into Left Arm (B) and Right Arm (C) securely.

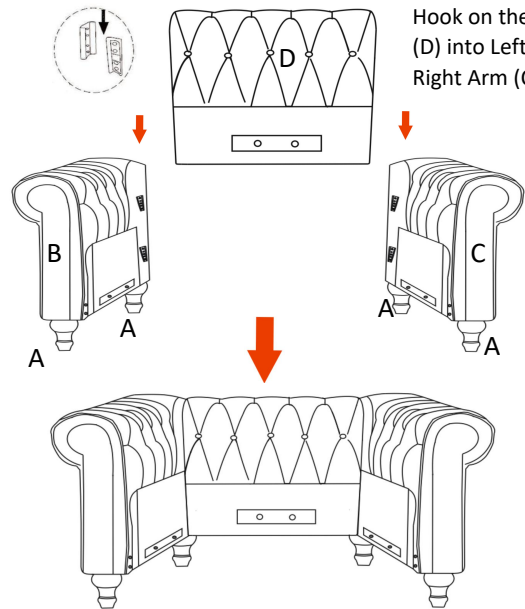


### STEP 3

Slightly loosen the four bolts using Allen Key(H) without removing the bolts completely from both Side Arms (B&C). Hook on Front Board (E) hooks into loosen bolts, once placed tighten and secure all four bolts with Allen Key (H)

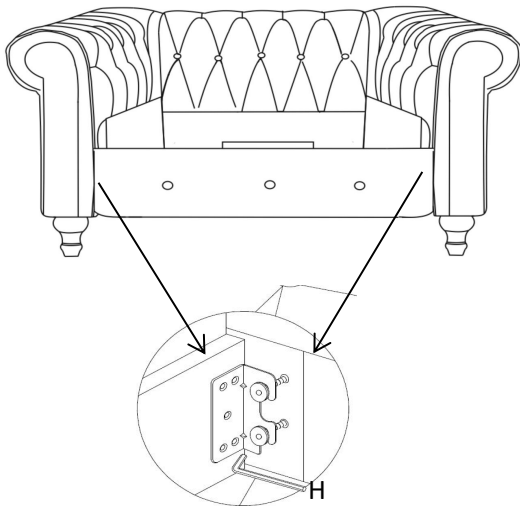


### STEP 4

① Put the Base support(G) into the sofa frame

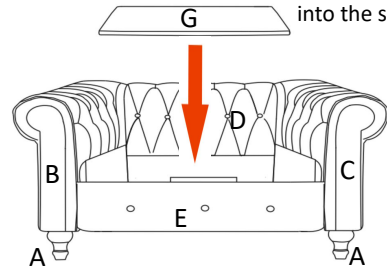

② Put the Seat cushion(F) on the Base Support(G)

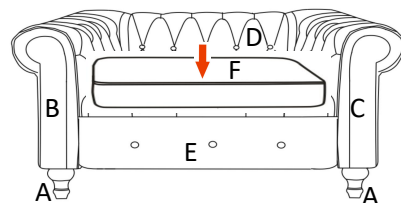

### STEP 5

