

TWO-HANDLE WALL MOUNT FAUCET

inch(mm)

2327200

1.2GPM 4.5L/min

You may need



For easy installation of your faucet you will need:

To READ ALL the instructions completely before beginning.




To READ ALL warnings, care, and maintenance information.


With 1.2 gpm are compliant with California water efficiency regulations, Complies with California Proposition 65 and with the Federal Safe Drinking Water Act.

In areas with extremely low water pressure causing the basin faucet water flow to be unsatisfactory, the water flow regulator may be removed to improve the water flow in the Spout.

Cleaning and Care


Care should be given to the cleaning of this product. Although its finish is extremely durable, it can be damaged by harsh abrasives or polish. To clean, simply wipe gently with a damp cloth and blot dry with a soft towel.

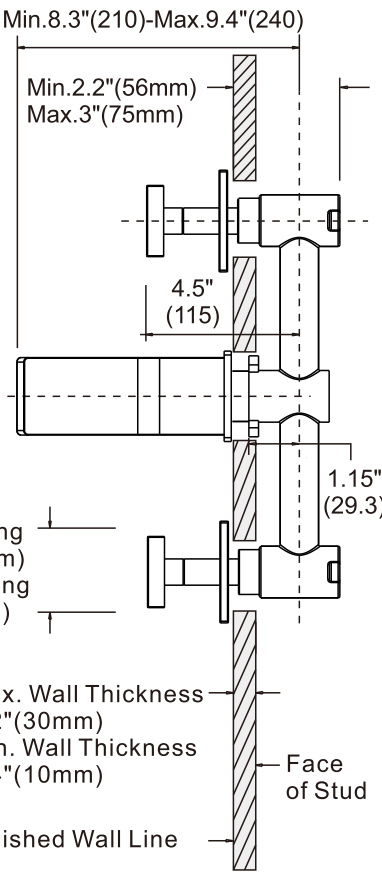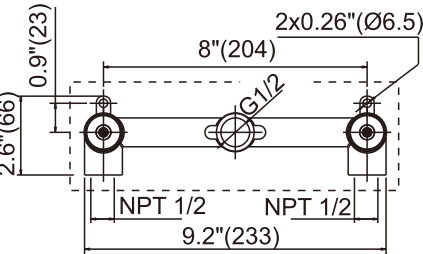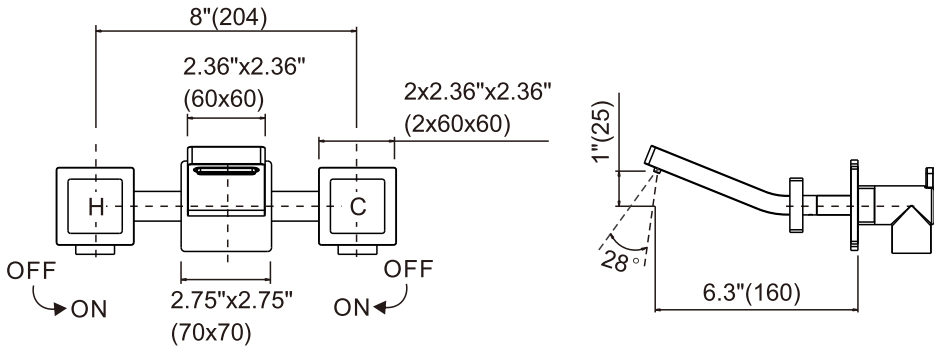

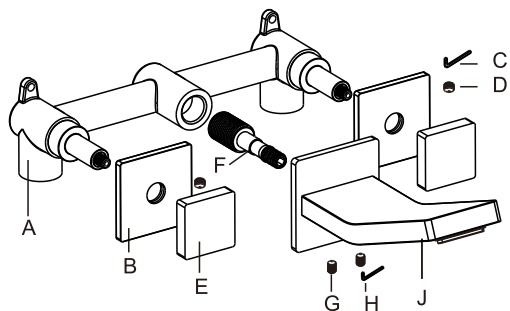


A. Faucet Body
B. Handle Escutcheon (X2)
C. #2.5 Hex Key
D. M5 Set Screw (x2)
E. Handle (x2)
F. G1/2 Connector
G. #2 Hex Key
H. M4 Set Screw (x2)
J. Spout

1

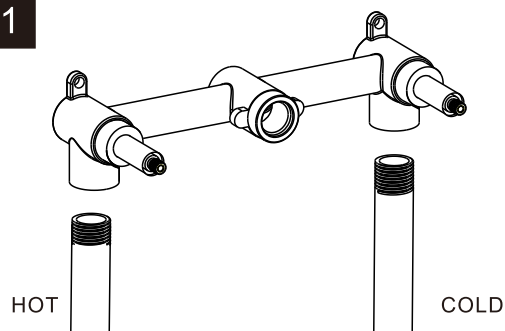


Ensure water is turned off prior to faucet installation.

2

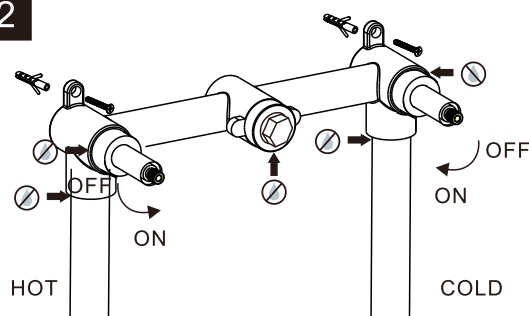

1. Turn on hot and cold water supplies.
2. Turn on stems, and flush water lines for one minute.
3. Check all connections at arrows for leaks.
4. Finish, turn stems off until they stop.
5. Fasten the faucet to the wall.


3

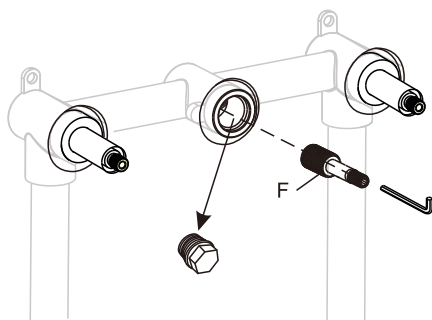

Apply teflon tape in a clockwise direction to all threaded connections.

2. Install G1/2 Connector (F) onto center valve.
3. Tighten G1/2 Connector (F) with wrench.
4. G1/2 Connector (F) is engaged to wall.


4

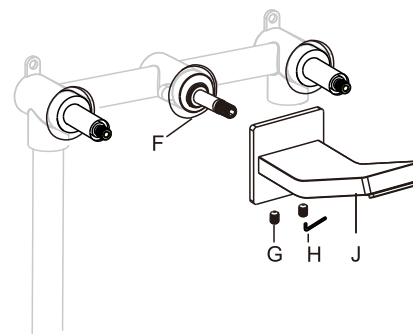

NOT WITH apply teflon tape to the spout (J) installation.

1. Install spout (J) with spout escutcheon onto G1/2 Connector.
2. Set Screw (G) onto spout escutcheon (H) by #2 Hex Key, Tighten Set Screw (G).


6

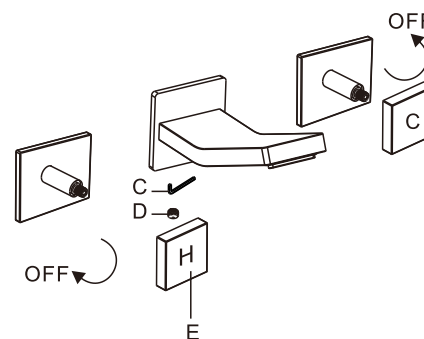

Turn stems off until they stop.

1. Place Set Screw (D) onto Hex Wrench (C) and insert into handle (E).
2. Tighten Set Screw (D).


5

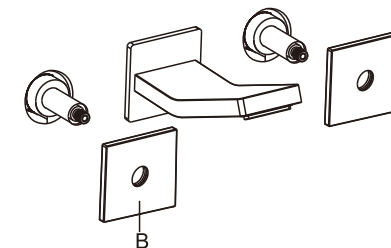

1. Tighten handle escutcheon (B) with hand.

ensure handle escutcheon (B) is engaged to wall.

7

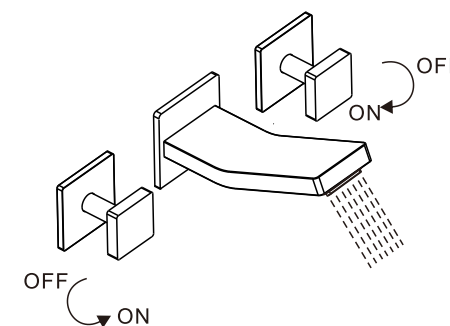

To flush debris from the plumbing system :

1. Turn on both handles and run water for 15 seconds.
2. Turn off handles.