


USER MANUAL



(Rated 110-130V/60HZ,
bulb 40W maximum.)



GU10*5
Light Bulb(Not included)

Packing List		
Part Name	QTY/ PCS	Parts Pictures
Lamp Body	1	
40MM Crystal Ball	36	
Strands Bag (1~36)	1	
Gloves	2	
Plastic Plugs	6	
Self-tapping Screws	6	
Hook	6	
Door Buckle	6	

Q:What is the finish of the base?

A:It is chrome. (Note: There is a white PE film on the surface of the base, which needs to be peeled off to expose the actual chrome surface. The layer is used to protect the chrome surface from scratches.)

Q:How many bulbs are included? What type of bulb is compatible?

A:Bulbs are not included. It requires 5 GU10/Bi-pin bulbs.

Q:What is the maximum compatible wattage for each bulb?

A:Halogen bulbs do not exceed 40W each, LED bulbs do not exceed 9W each.

Q:What is the voltage of the light?

A:Applicable voltage range 90-260v.

Q:Is this fixture dimmable?

A:Yes, it can be dimmed. But it requires dimmable bulbs, and a dimmer needs to be installed for this light.

Q:Can it be installed in a sloping ceiling?

A:It cannot be installed directly on the sloping ceiling. However, you can use an "adapter" so-called "chandelier lift", and you need to make sure it is level when installing.

Q:What power source does this product use?


A:Hardwired.

Q:Is this product ETL
(Electrical Testing Labs) listed?

A:Yes, ETL Listed.

Q:Is the hanging height adjustable?

A:No, it is fixed.

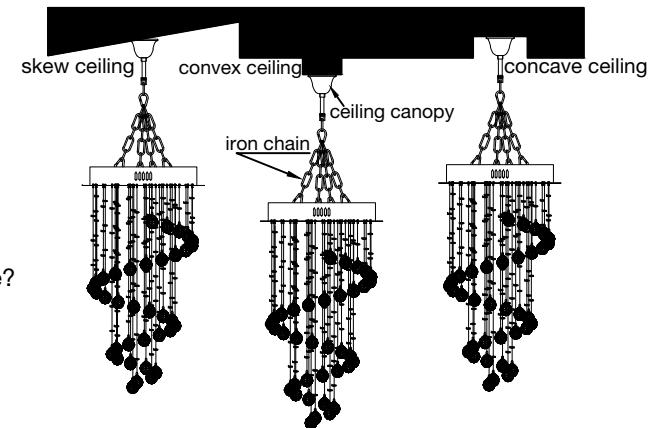

Assembly and Installation Steps

Size: Ø400*H740MM

Step 1

1A. Lock the crossbar to the junction box of the ceiling by using 4pcs of 5/32 screws in the accessories bag.
1B. Connect the wires. The hot/positive(+) wire is the one which has writing on it. The negative(-) wire is the one which has no writing.



Step 2

There are 4 screws and 4 nuts in the plastic bag. Hang the lamp to ceiling by attaching the screws to the nuts.

Step 3

Install 5 GU10 (Not included).



Step 4

Tear off the protect film.

Step 5

Buckle the crystal ball and hang the crystal string on the metal ring. The recommended installation sequence is from 1 to 36.

①-③⑥ Strand Each 1 pcs
crystal ball 36 pcs

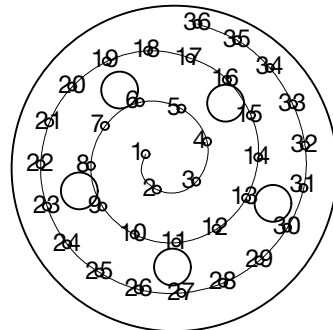


Please note: The parts in this table are completely unassembled, for illustrative purpose. In the actual product that you receive, some parts are assembled and attached together.

WIRE CONNECTION DIAGRAM

Wires met safety standards are recommended to connect the supply circuit.

CAUTION: Risk of fire

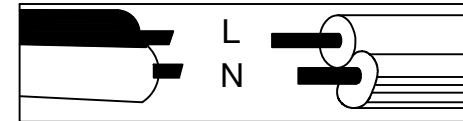

CANOPY INSTALLATION INSTRUCTIONS

Please read all instructions carefully. Before you proceed to install, make sure that the power off and remains off until installation is complete.

