PREMIUM TRUCK SCISSOR DOCK LIFT - WL-100-5-48

ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE
DIMENSIONS WITH YOUR SALESPERSON

STANDARD FEATURES

MODEL NUMBER: WL-100-5-48 UNIT TO BE MOUNTED: AT SURFACE OR IN PIT (CIRCLE ONE) CAPACITY (EVENLY DISTRIBUTED):

5,000 LBS

OVERALL PLATFORM SIZE: (48" X 96")

RAISED HEIGHT 68" ± 2"

LOWERED HEIGHT: 8"
REMOVABLE HANDRAILS AND 4"NONREMOVABLE TOE BOARDS 42" HT W/

21" MIDRAIL

TRUCK BRIDGE IS 48" W X 18" L AT ROLLER END W/ CHAINS & HANDLES FRAME SIZE IS: 41" W X 93" L

SHIPPING WT APPROX: 2500 LBS ± 6 1/2 HP POWER UNIT (SEE BOTTOM

OF PAGE)

W/8'OF HYDRAULIC HOSE -HAND-HELD CONTROL ON A

4'-20' COIL CORD

REFER TO THE UNIT'S ELECTRICAL

DIAGRAM FOR

ELECTRICAL SERVICE

REQUIREMENTS

-INSTALL TO MEET ALL APPLICABLE

STATE & LOCAL

CODES FOR YOUR AREA!

5" BEVELED TOE GUARD

ARCHITECTURAL REVIEW FOR CORRECTNESS OF PIT AND FOR


COMPLIANCE TO LOCAL AND STATE

CODES IS RECOMMENDED.


DIMENSION TOLERANCE ± 1/4"

SPECIAL FEATURES

NONE

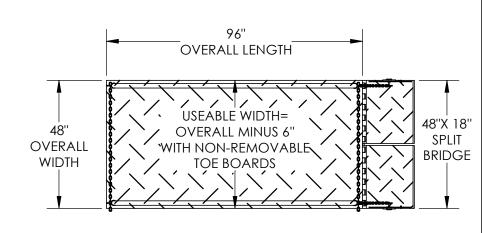

** STANDARD UNIT NOT INTENDED FOR SIDE CROSS LOAD **

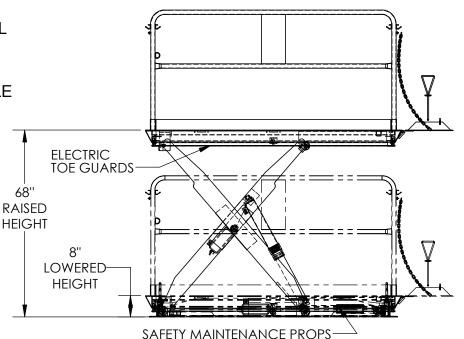

	FOR INTERNAL USE ONLY PROJECT SIGN OFF			
A P		SALES		
P		ENG.		
R		FAB.		
0		POWER		
A	HYDRAULIC UNIT OVERALL DIMENSIONS 14"W x 33"L x 31"H			

(COMES W/ 8FT HOSE)

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ALL SPECIAL UNITS ARE NON-RETURNABLE

[] As drawn [] As marked

Signed: Date:

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

POWER	AC	C DC (1:)	YOIL	
MOTOR VOLTAGE 115 208				230	460	
DEDICATED CIRCUIT REQUIRED 60Hz						
MOTOR PH	iase - s	SINGLE		THR	EE	
CONTRO)L	HAND		ГООТ		

