

artos[®]

TS275

OPERATING SPECIFICATIONS

Square 2-Way Pressure
Balance Shower Trim Kit with
Hand Held Shower



INCLUDES

Rain Head & Arm
Valve Trim
Hand Shower

OPERATING PRESSURE

Minimum: 15 psi
Maximum: 125 psi
Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW CAPACITY

Shower Head: 1.8 USGPM
Hand Shower: 1.8 USGPM

STANDARDS

ASSE 1016-2011 | ASME_A112.1016-2011 | CSA B125:16-11





artos[®]

TS275

PRODUCT DIMENSIONS

Square 2-Way Pressure
Balance Shower Trim Kit with
Hand Held Shower

for trim kit


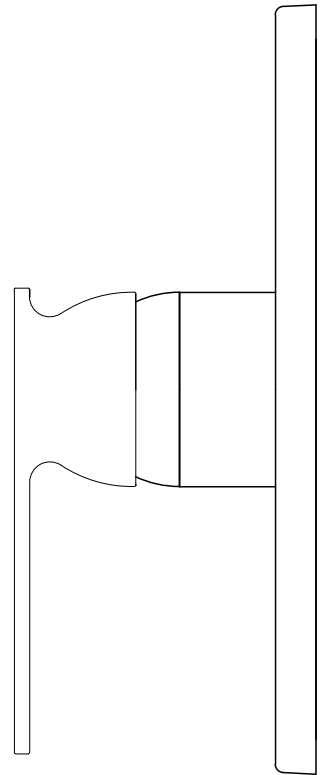
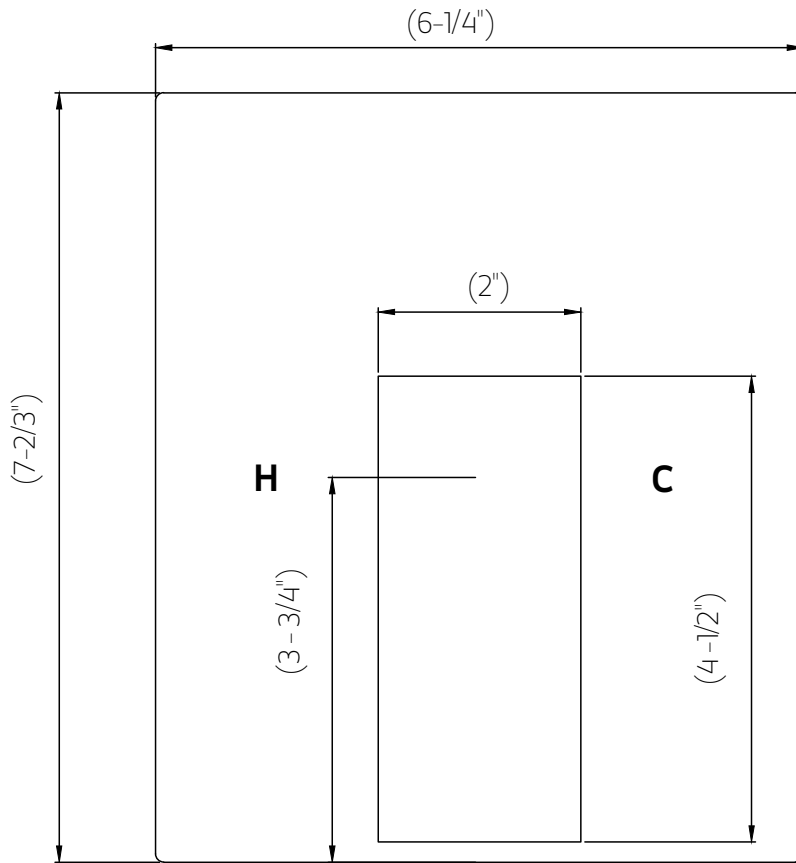


TS275

PRODUCT DIMENSIONS

Square 2-Way Pressure
Balance Shower Trim Kit with
Hand Held Shower

for shower head

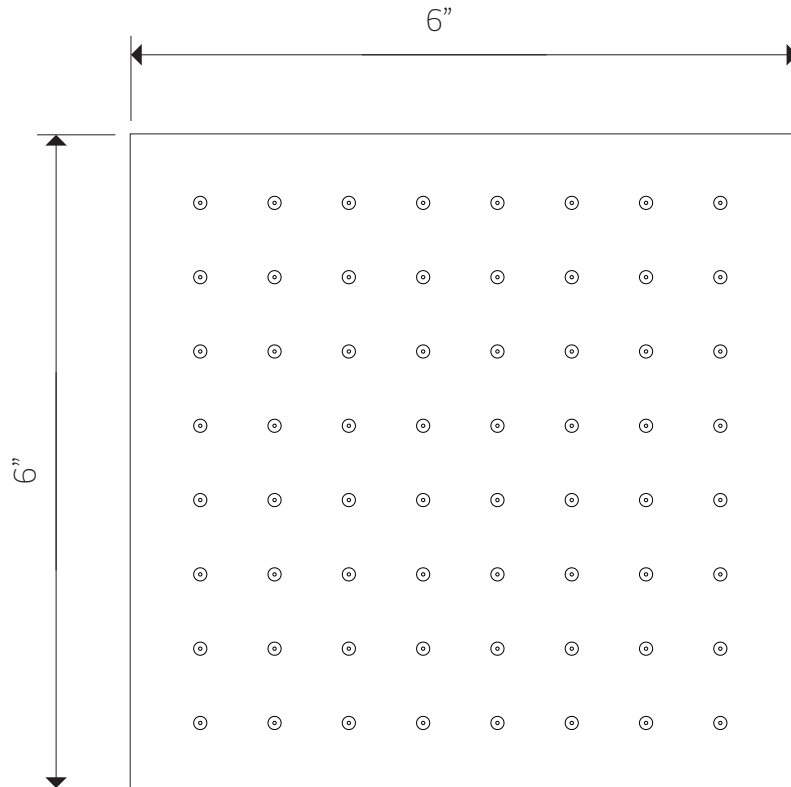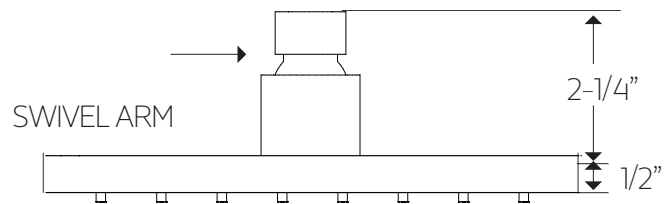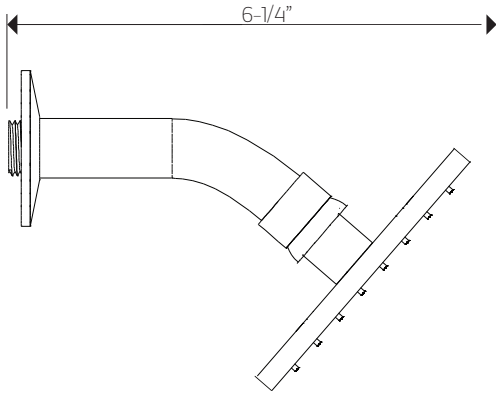

artos[®]

TS275

PRODUCT DIMENSIONS

Square 2-Way Pressure
Balance Shower Trim Kit with
Hand Held Shower

