Triton® Bowe® | K-400T70-4ANA

0.5 gpm centerset bathroom sink faucet with aerated flow, gooseneck spout and lever handles, drain not included

Features

- Quarter-turn washerless ceramic disc valves
- Vandal-resistant aerated flow
- Lever handle
- Less drain
- 0.5 gpm (1.9 lpm) maximum flow rate at 60 psi (4.14 bar)

Sustainability

Available Colors/Finishes

Color tiles intended for reference only.

CP Polished Chrome

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-14-2026 11:01 - US-CA

THE BOLD LOOK OF KOHLER

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type:	Lever

Spout

Spout Reach:	5-3/16" (132 mm)

Flow Rate

Faucet Flow Rate:	0.5 gpm (1.9 l/min)

Valves

Included Valves:	Ceramic disc, Thermostatic Mixer

Material

- Brass
- Brass valve bodies

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-14-2026 11:01 - US-CA

THE BOLD LOOK OF KOHLER.

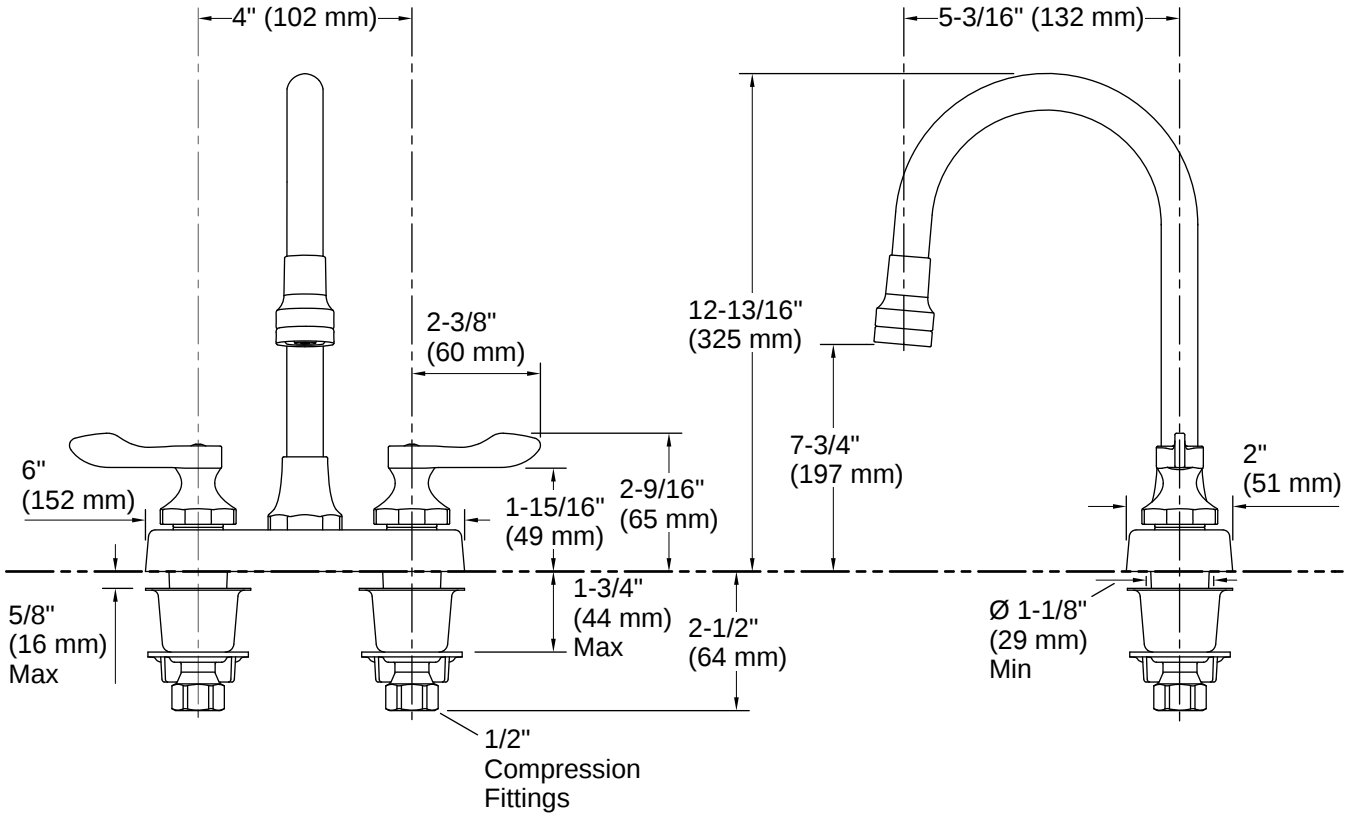

Installation Notes

Install this product according to the installation instructions.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-14-2026 11:01 - US-CA

THE BOLD LOOK OF KOHLER.