

NOTICE

- *Please make sure that you have all parts indicated and they are in good condition before you begin assembly of this item. Refer to part list and hardware list below for guidance.
- *This item should be assembled on a soft surface to prevent scratching the finish during assembly.
- *This item may require periodic tightening.
- *If you are having difficulty, our friendly Customer Care team is always here to help.

PREPARATION

- *Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- *If any part is missing or damaged, do not attempt to assemble the product.
- *Tools Required for Assembly (included): Allen Key
- *Estimated Assembly Time: 10 minutes.

CARE AND MAINTENANCE


Store outdoor furniture indoors or cover well when not in use. Dust regularly with small brush or vacuum. Spills should be taken care of immediately before they harden or stain with a slightly damped sponge.

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Seat Frame		2x	HW1	Allen Bolt (M6x45)		4x
B	Back Frame		2x	HW2	Allen Bolt (M6x20)		4x
CSH1	Seat Cushions		2x	HW3	Flat Washer (M6)		8x
				HW4	Allen Key (4x75)		1x

INSTALLATION & ASSEMBLY

19.69"L x 23.62"W x 34.26"H

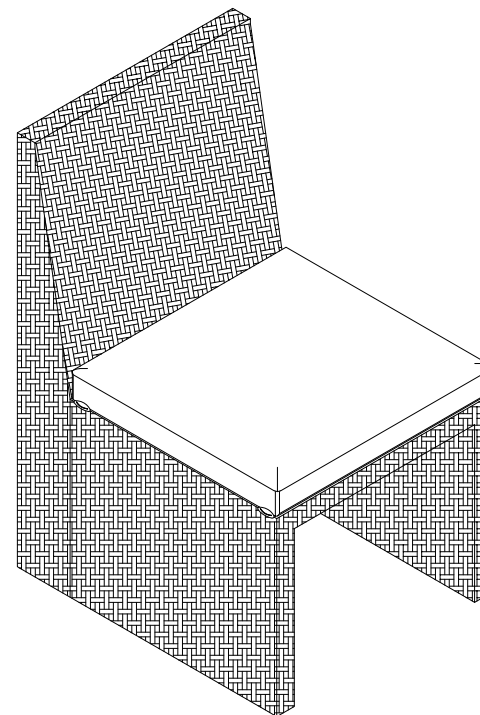

! WARNING !



Weight capacity : 275 Lbs (single seat)

Warning : Do not stand on chair

Warning : Do not over torque bolts/screws

PREPARATION



*Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.

*If any part is missing or damaged, do not attempt to assemble the product.

*Estimated Assembly Time : 10 minutes.

*Tools Required for Assembly (included): Allen Key


*If you are having difficulty, our friendly Customer care team is always here to help.

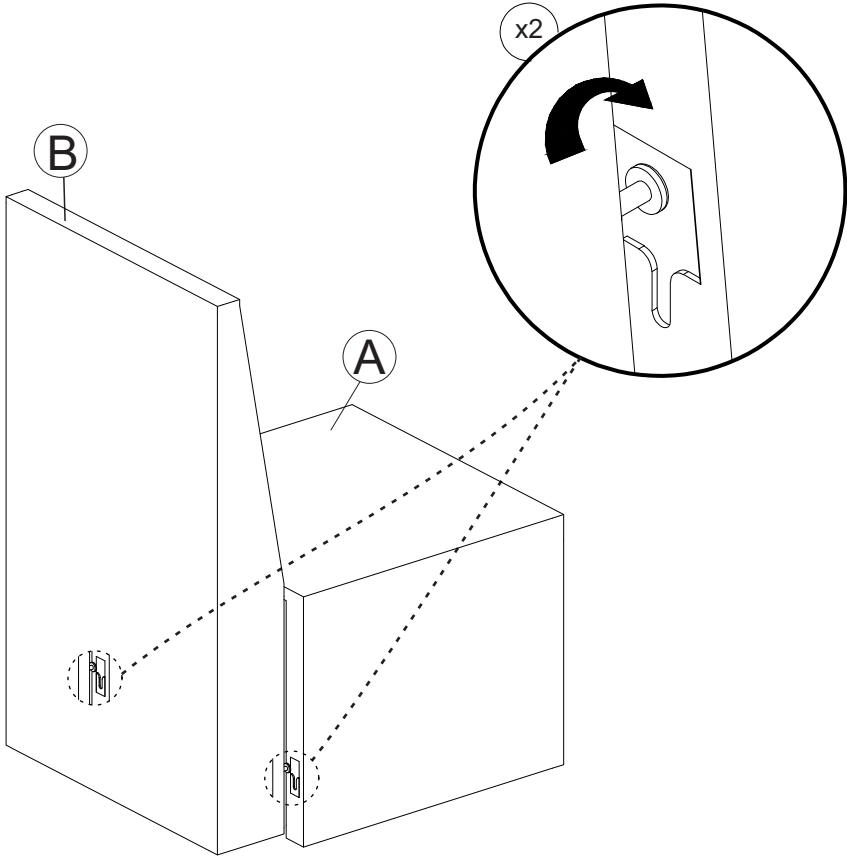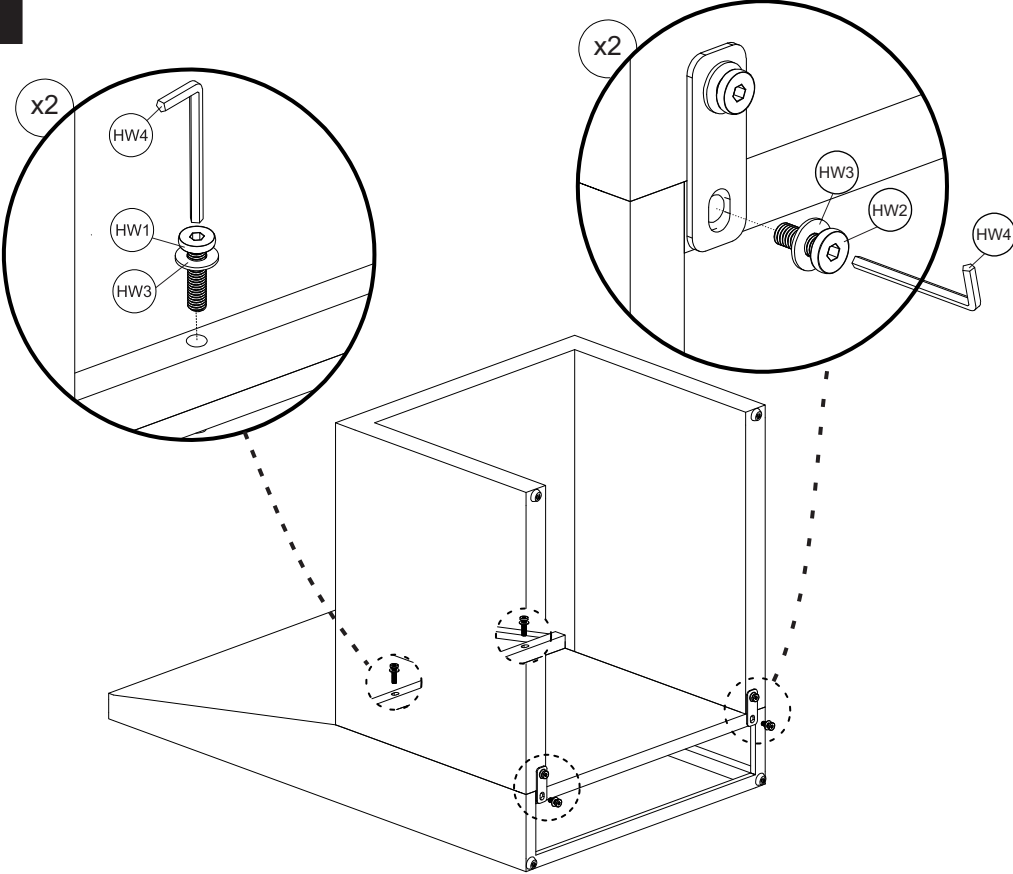1 	2 
STEP 1: On a soft surface, align the latch on the Back Frame (B) with the hole on the Seat Frame (A). Make sure the lock is tight.	STEP 2: Align the screw holes on the Back Frame (B) to the screw holes on the Seat Frame (A). Place the Flat Washer (HW3) on the Allen Bolts (HW1 & HW2) in the order shown below. Use the Allen Key (HW4) to screw in the Bolts (HW1 & HW2) with the washers attached.

PREPARATION


- *Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- *If any part is missing or damaged, do not attempt to assemble the product.
- *Estimated Assembly Time : 10 minutes.
- *Tools Required for Assembly (included): Allen Key
- *If you are having difficulty, our friendly Customer care team is always here to help.

3

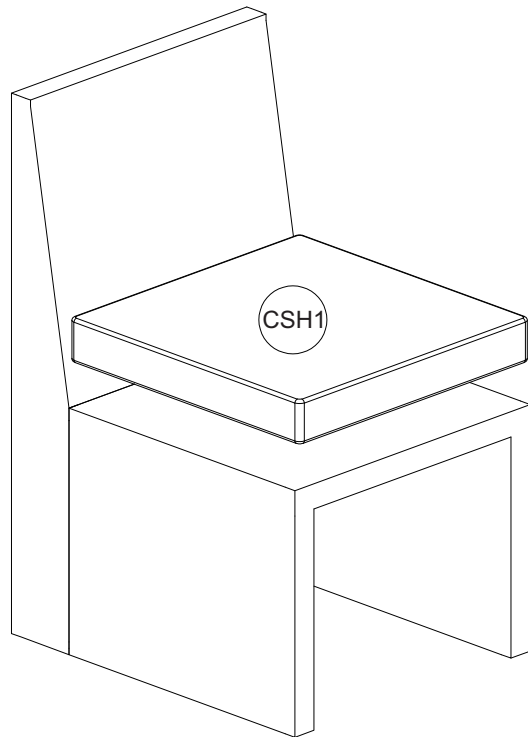

STEP 3: Place the Seat Cushion (CSH1) on the assembled chair frame.

4

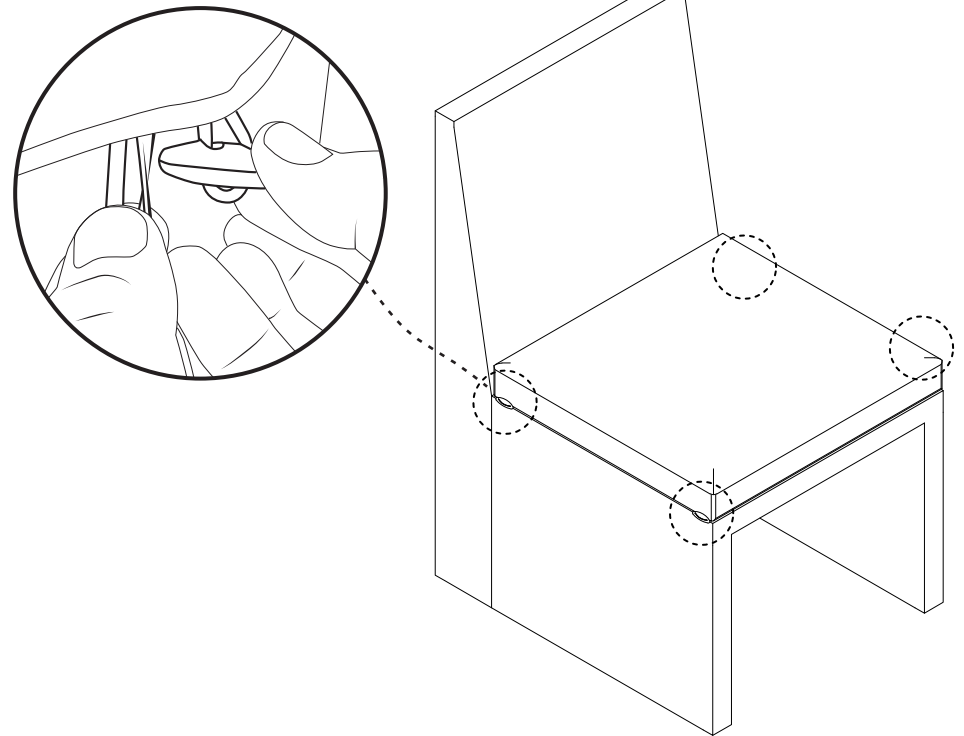


STEP 4: Insert the toggle wood buttons on Seat Cushion through the loops along the side edges of Chair Seat to secure the cushion in place.

PREPARATION

- *Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- *If any part is missing or damaged, do not attempt to assemble the product.
- *Estimated Assembly Time : 10 minutes.
- *Tools Required for Assembly (included): Allen Key
- *If you are having difficulty, our friendly Customer care team is always here to help.

5

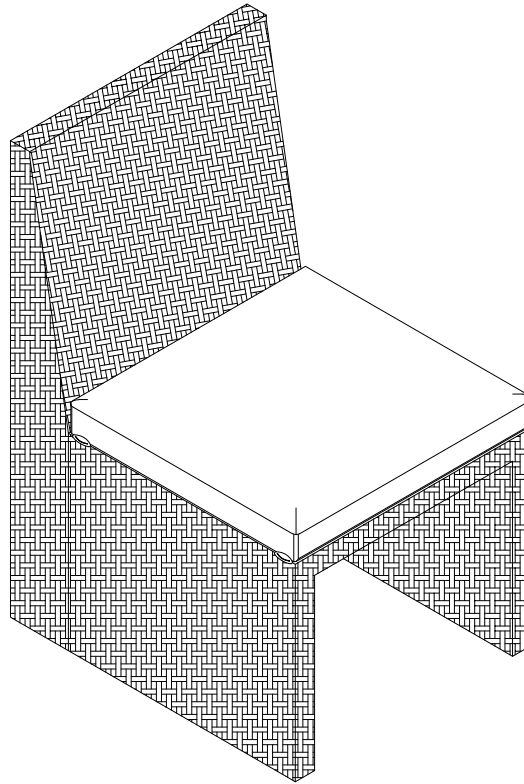

STEP 5: Finishing for using