

RECESSED DOWNLIGHT

ROUND & SQUARE

2", 3", 4"



SPECIFICATIONS

ELECTRICAL


	MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	EFFICACY (LPW)	IC RATED	LIFETIME
2"	LR23237	LED5W/DL2/GB/30K/FL	5	120V	YES	80	YES	50,000
	LR23238	LED5W/DL2/GB/40K/FL	5	120V	YES	80	YES	50,000
	LR23239	LED5W/DL2/GB/50K/FL	5	120V	YES	80	YES	50,000
3"	LR23240	LED8W/DL3/GB/30K/FL	8	120V	YES	75	YES	50,000
	LR23245	LED8W/DL3/GB/50K/FL	8	120V	YES	75	YES	50,000
	LR23247	LED8W/DL3/GB/30K/SQ	8	120V	YES	75	YES	50,000
	LR23249	LED8W/DL3/GB/50K/SQ	8	120V	YES	75	YES	50,000
4"	LR23251	LED11W/DL4/GB/30K/RD	11	120V	YES	91	YES	50,000
	LR23253	LED11W/DL4/GB/40K/RD	11	120V	YES	91	YES	50,000
	LR23254	LED11W/DL4/GB/50K/RD	11	120V	YES	91	YES	50,000

PHOTOMETRIC


MODEL	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	DAMP LOCATION	COST/YR	ENERGY STAR	ETL LISTED
LR23237	3000K	SOFT WHITE	400	40°	80	YES	\$ 0.60	YES	YES
LR23238	4000K	COOL WHITE	400	40°	80	YES	\$ 0.60	YES	YES
LR23239	5000K	BRIGHT WHITE	400	40°	80	YES	\$ 0.60	YES	YES
LR23240	3000K	SOFT WHITE	600	40°	80	YES	\$ 0.60	YES	YES
LR23245	5000K	BRIGHT WHITE	600	40°	80	YES	\$ 0.96	YES	YES
LR23247	3000K	SOFT WHITE	600	40°	80	YES	\$ 0.96	YES	YES
LR23249	5000K	BRIGHT WHITE	600	40°	80	YES	\$ 0.96	YES	YES
LR23251	3000K	SOFT WHITE	1000	40°	80	YES	\$ 1.32	YES	YES
LR23253	4100K	COOL WHITE	1000	40°	80	YES	\$ 1.32	YES	YES
LR23254	5000K	BRIGHT WHITE	1000	40°	80	YES	\$ 1.32	YES	YES

GENERAL

DIMENSIONS

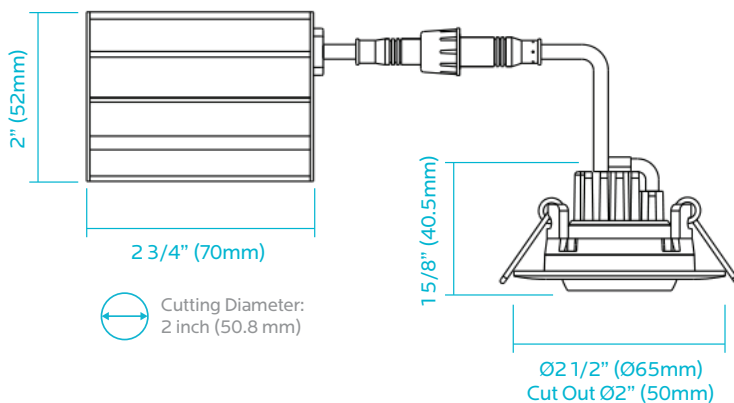


2" ROUND

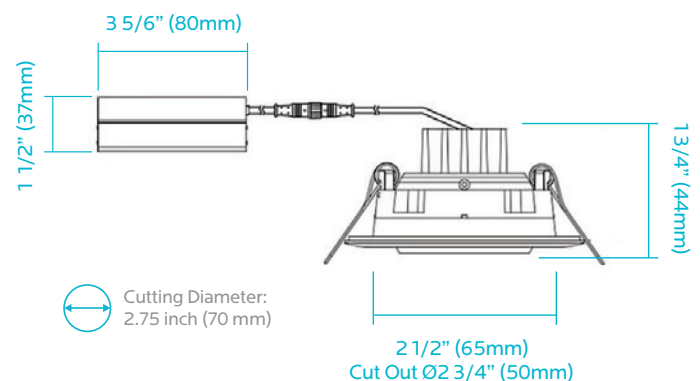


3" ROUND

DIMENSIONS

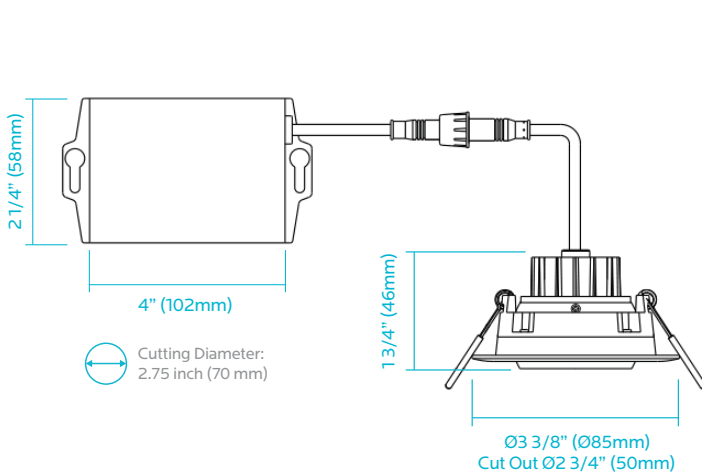





3" SQUARE

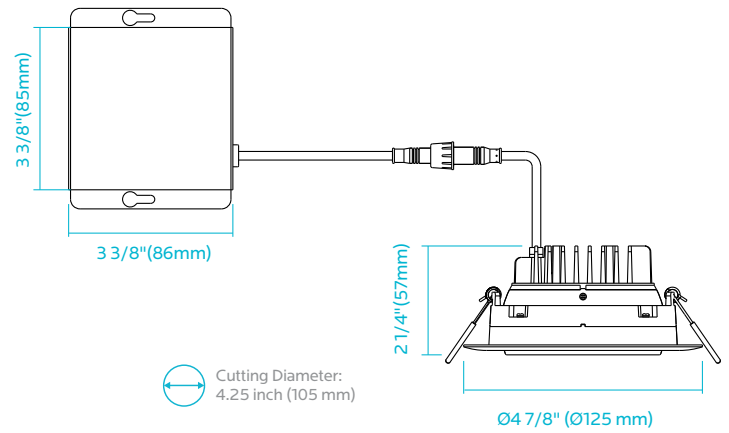

4" ROUND

INSTALLATION

2" GIMBAL

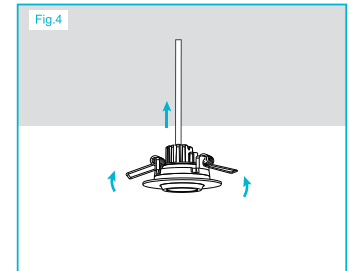

3"/4" GIMBAL

