

EL1499S

4" Low Voltage Shallow Housing



PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

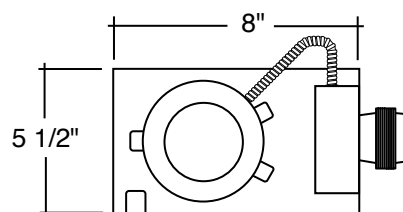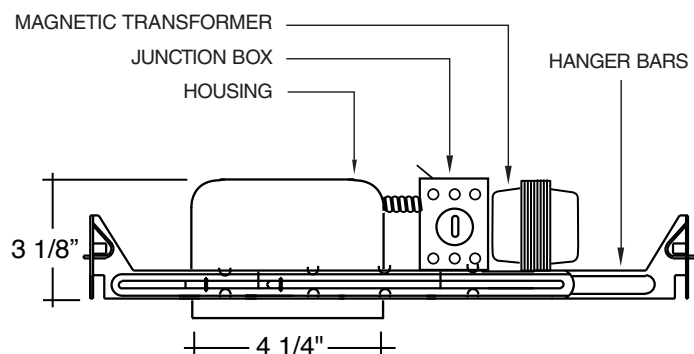

PRODUCT SPECIFICATIONS

Housing Features: Integral thermal protector guards against improper lamping. Single wall construction. 3 5/8" deep aluminum housing. For use in non-insulated ceilings, where insulation can be kept 3" from all sides of fixture.

Lamp: 12V, 50W Maximum; MR16.

Lamp Holder: MR16 Socket.

Trim Ring: Polycarbonate trim ring, metal trim ring, designed to conceal ceiling cutout.

Transformer: 120V / 12V / 50VA
Magnetic Transformer AC Type.

Note: Use only dimmers specifically designed for used with magnetic transformer. Low voltage luminaires may produce audible sound when used with dimmers.

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" knockout. Junction box provided with removable access plates. Maximum (6) no. 12 AWG branch circuit conductors.

Mounting: Hanger bars span 24".
Housing accommodates various ceiling thickness.

Mounting Frame: Stamped galvanized steel material for corrosion resistance.

Labels:

- U.L. listed for damp locations.
- U.L. listed for feed through wiring.

CATALOG NUMBER

Example: EL1499S-EL1421W

See trims page for variety of trims available.