

NOTICE

- * Please make sure that you have all parts indicated and they are in good condition before you begin assembly of this item. Refer to part list and hardware list below for guidance.
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly.
- * This item may require periodic tightening.

PREPARATION


- *Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 10 minutes.
- * If you are having difficulty, our friendly Customer Care team is always here to help.

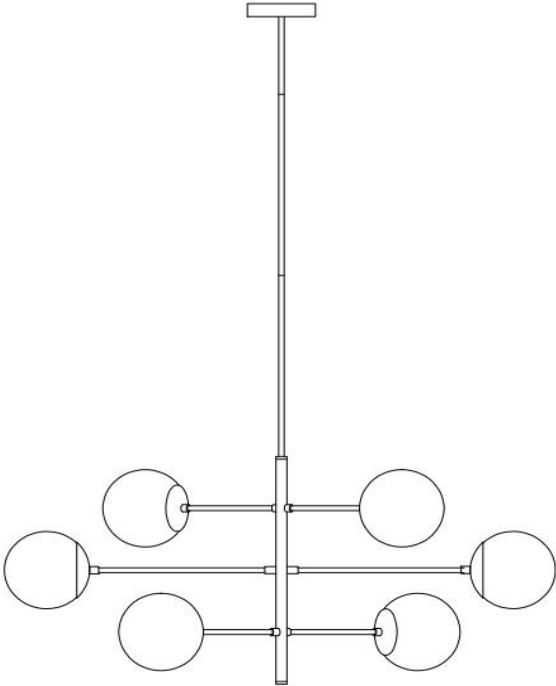
41.3"LX28.4"WX(19.5 -52.9")H

CARE AND MAINTENANCE

Unplug lamps before using any cleaning solutions. Dust shades with a feather duster or with an appropriate vacuum_brush attachment. Wipe with a soft, dry cloth and clean lamp bases with the methods appropriate to the material.Avoid the use of chemicals and household cleaners as they may damage the finish.

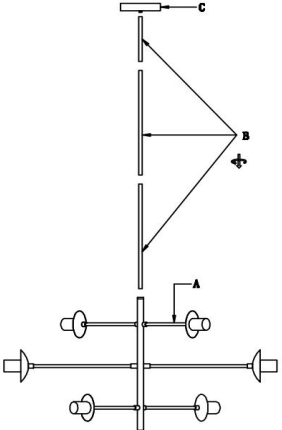
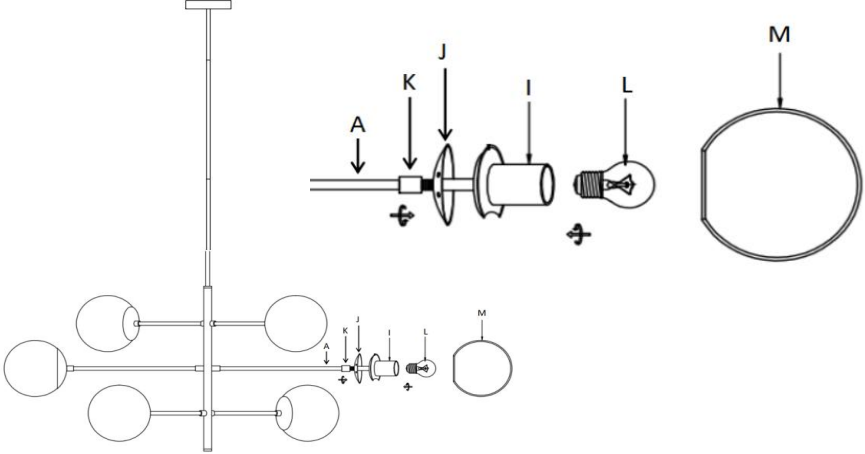
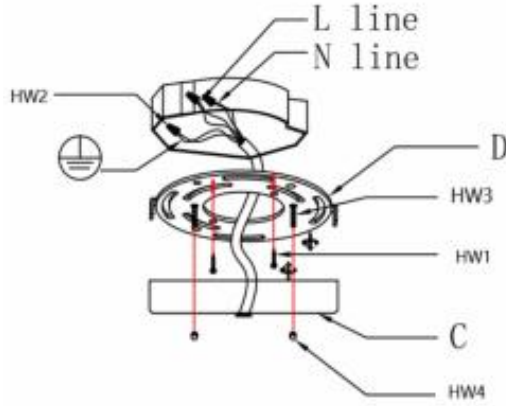
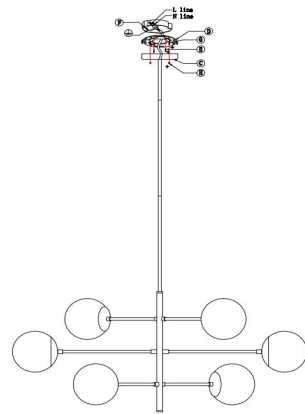
Part List and Hardware List

PEICE	DESCRIPTION	PICTURE	QUANTITY	PEICE	DESCRIPTION	PICTURE	QUANTITY
A	Lamp Body		1X	HW4	M4 Nut ϕ 11X9mm		2X
B	Tubes		3X	I	Socket		6X
C	Canopy		1X	J	Dish		6X
D	Mounting Plate		1X	K	Connector		6X
HW1	Screw ϕ4*25MM		2X	L	Light bulb		6X
HW2	Terminal Cap		2X	M	Shade		6X
HW3	Screw ϕ4*25mm		2X				



PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 10 minutes.

		
STEP1:Unpack all parts from cartons careful.Install the tube(B) one by one into the lamp body(A), and lock them clockwise.		STEP2: Install all light bulbs(L) into socket(I),and put all glass shades(M) into the socket(I), then fix the shade in correct position in the dish(J), lock them with the connector(K).
		
STEP3:To connectfixture wires: Connectthe live wire (L) from fitting to the live wire from main powersupply. Connectthe neutral wire (N) from fitting to the neutral wire frommain powersupply.make the Terminal cap(HW2) connectthe ground wire. Please pay close attention to avoiding the wires exposingoutside when wiring connections.		STEP4:Install the mounting plate(D) into the canopy(C), lock them with screw(HW3). Then install the canopy(C) to the junction box with screw(HW1), then fix them with M4 nuts(HW4). Consult a qualified electrician to ensure correct branch circuit conductor