

Instructions

⚠ WARNING

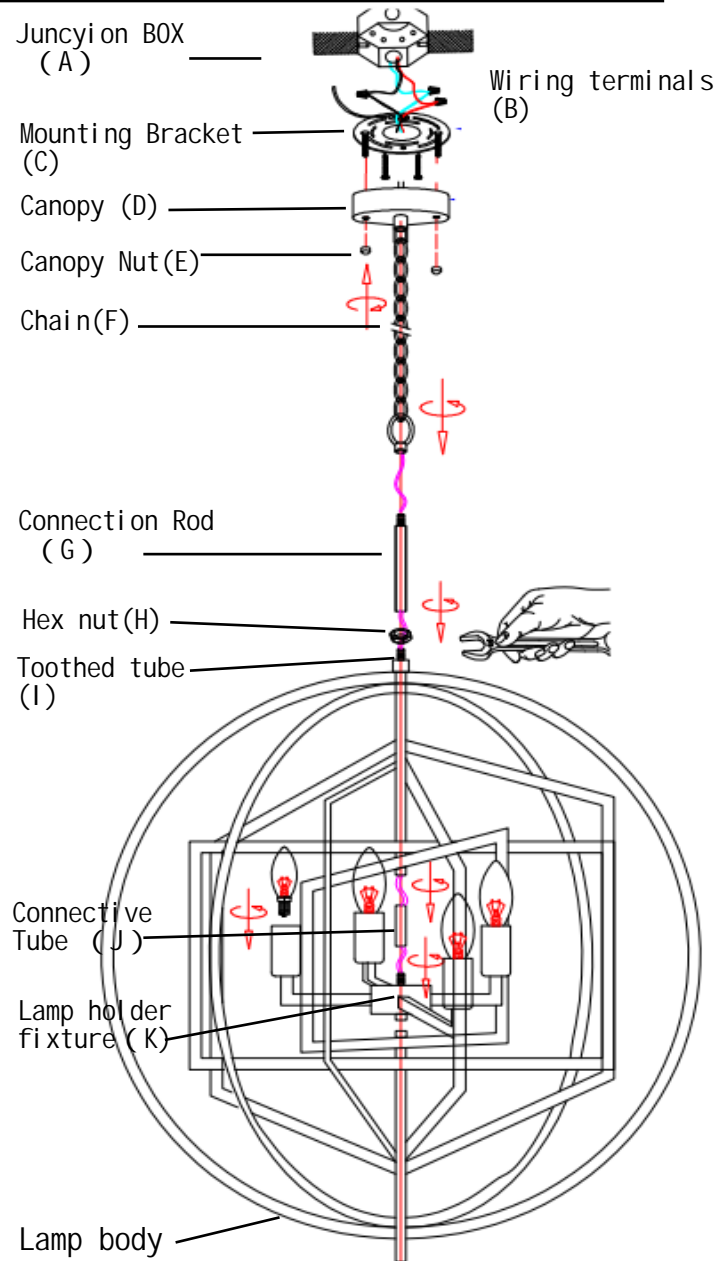
- Check for electric, gas, & plumbing lines before drilling or consult a professional.
- Turn off your electricity at the circuit breaker or main fuse box before installation. Do not restore power to the line until the light has been fully installed.
- Do not use with bulbs exceeding the recommended wattage.
- Always switch off the electricity supply and allow bulbs to cool for 10 minutes before changing it.
- Do not look directly at lit bulb.



IMPORTANT SAFETY INSTRUCTIONS

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING TO A WOODEN STRUCTURAL BEAM. UNIQUE OR ALTERNATIVE INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

Installation process

1. Twist the Connective Tube (J) into the Lamp holder fixture (K)
2. Twist Toothed Tube (I) into Connective Tube (J) and secure with Hex Nut (H)
3. Connect Chain (F) and Connection Rod (G) to Toothed tube (I) and adjust the length to suit oneself
4. Fix the installation bracket (C) to the junction box (A)
5. Refer to the wiring diagram and connect the power cord using Wiring terminals (B). Pay attention to distinguishing positive and negative poles
6. Cover the Wiring terminals (B) with Canopy (D) and tighten them using Canopy Nut (E)
7. Unfold the lamp body and adjust it to the position you like. twist in the E12 bulb MAX60W (Not included)



d1		x 3
d2		x 2

E12 Socket Max
.60W Bulbs
(not included)