













Assembly Instructions

56004250

Parts and Tools

A	Mounting Bracket		X 1	<p>Before beginning</p> <p>1) Check and open the numbered packaged bags.</p> <p>2) Read this Assembly Instructions from beginning to end before starting to assemble.</p> <p>3) Take an inventory of the required parts to ensure all are available.</p> <p>4) Assemble the separated parts according to the illustration with the providing tools.</p> <p>5) To prevent accidental choking hazards, keep all packing materials away from small children.</p> <p>6) Only tighten hardware until ALL hardware are fully engaged on their locations. Overtighten bolts will damage the bolt threads.</p> <p>7) Use only factory provided hardware to assemble. Unapproved hardware can damage product or jeopardize the structural integrity of the product.</p> <p>8) The use of power tool to assemble is not recommended due to high risk of over-torque, which can damage the product.</p> <p>WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LINCENSED ELECTRICIAN.</p> <p>WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.</p> <p>*Please make sure power is shut off!*</p>
B	Canopy		X 1	
C	Chain		X 1	
D	Open Ring		X 1	
E	Lamp Body		X 1	
F	Glass Plaque		X 84	
G	Wire Connector		X 3	
Z1	Nut for A (Spare Parts)		X 1	
Z2	Nut for A (Spare Parts)		X 2	
Z3	Non Slip Washer for A (Spare Parts)		X 1	
Z4	Non Slip Washer for A (Spare Parts)		X 2	

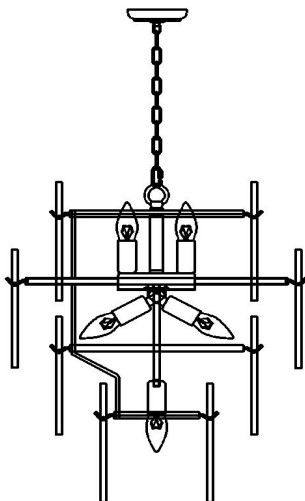

ASSEMBLY REQUIRES
TWO PEOPLE



20 MINUTE
ASSEMBLY TIME




KEEP INSTRUCTIONS
FOR FUTURE USE

Assembly Instructions

56004250

1

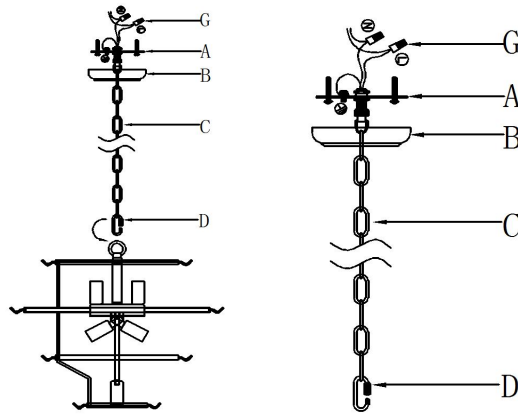


- 1) Remove the mounting bracket (A) from the canopy (B) by loosening the lock collar.
- 2) Taking off the open ring and use the dimensions of the fixture as a guide, shorten the chain (C) as needed using a pair of chain pliers.
- 3) Use the open ring (D) to link the chain (C) and the loop, then put the cable and naked earth cable through the chain in every 3-4 rings until through the ceiling loop.
- 4) ENSURE THE ELECTRICITY SUPPLY IS TURNED OFF BEFORE PROCEEDING.
- 5) Affix the mounting bracket (A) on the outlet box
- 6) Wrap both safety cable with wire connectors (G), push the cable into the outlet box.
- 7) Attach the canopy (B) to the mounting bracket (A) and secure with lock collar

2




E12 Max 40W

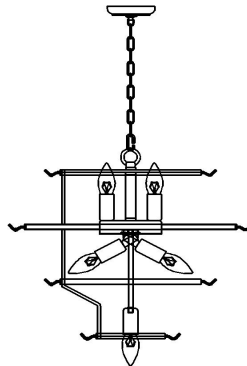


- 1) Install the bulbs (Not Included), gently grasp the bulb firmly and rotate it clockwise until it is securely in place.

3

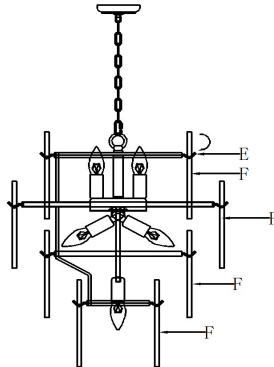

- 1) Install the glass (F) onto the bent wire of Lamp Body (E) by starting from the bottom and progressing towards the top rings, following the illustration.

4

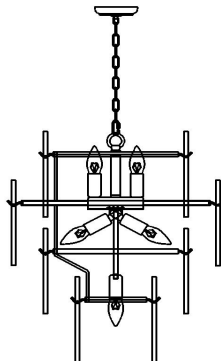

- 1) Once the installation is complete, remember to turn on the power at the fuse or circuit breaker.

Clean with a dry, soft cloth only, use no harsh abrasives or chemical agents