


Pipe Wall Mounted Clothing Rack

ASSEMBLY INSTRUCTION

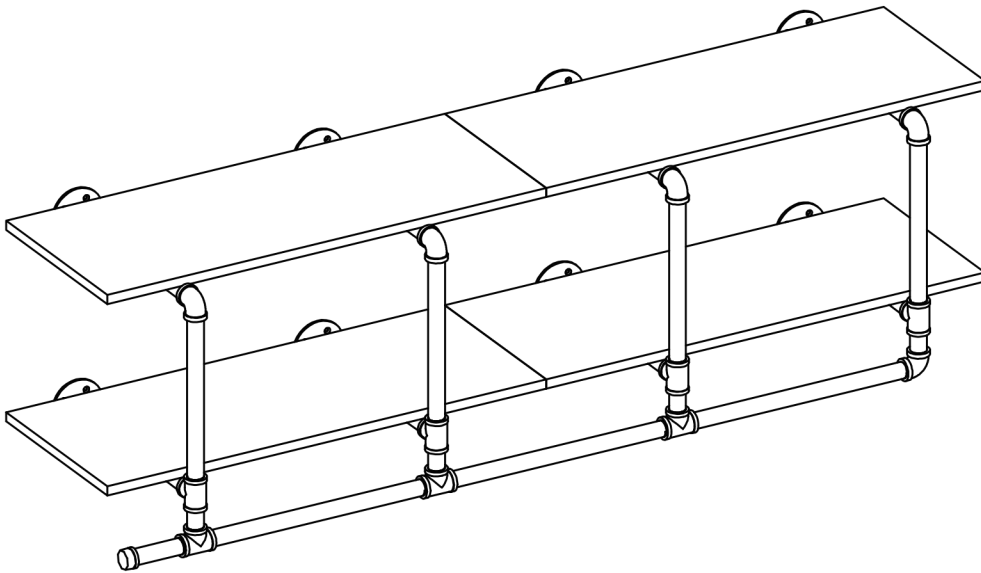


Option A





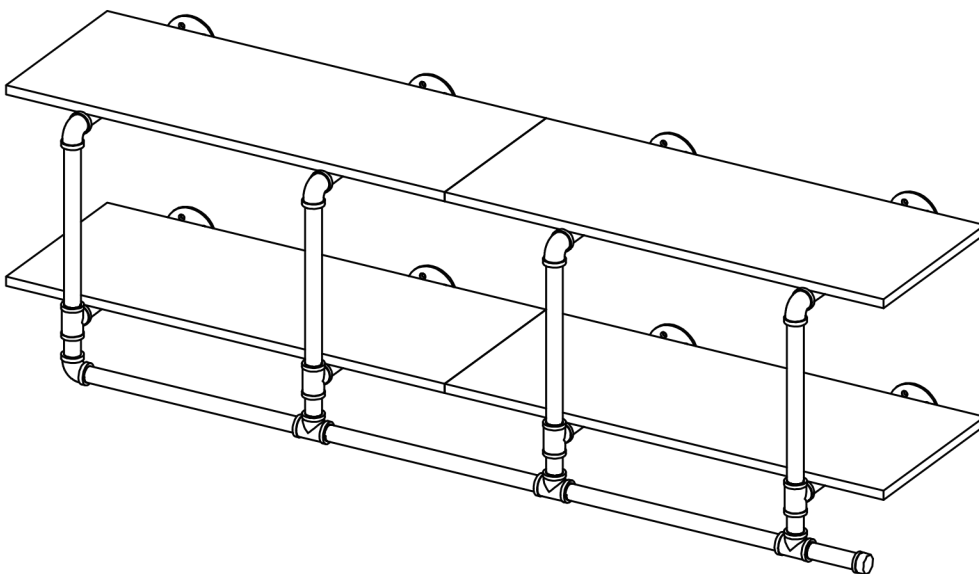








Option B

TIPS:


1. Please read this instruction manual carefully, follow it step by step and pay attention to the notes, you will assemble it quickly, safely and correctly.
2. Two people are recommended to install, which will greatly improve your installation efficiency.
3. Put the screws in loosely until all pieces are together and then tighten them all. It will save your time if you make a mistake while installing

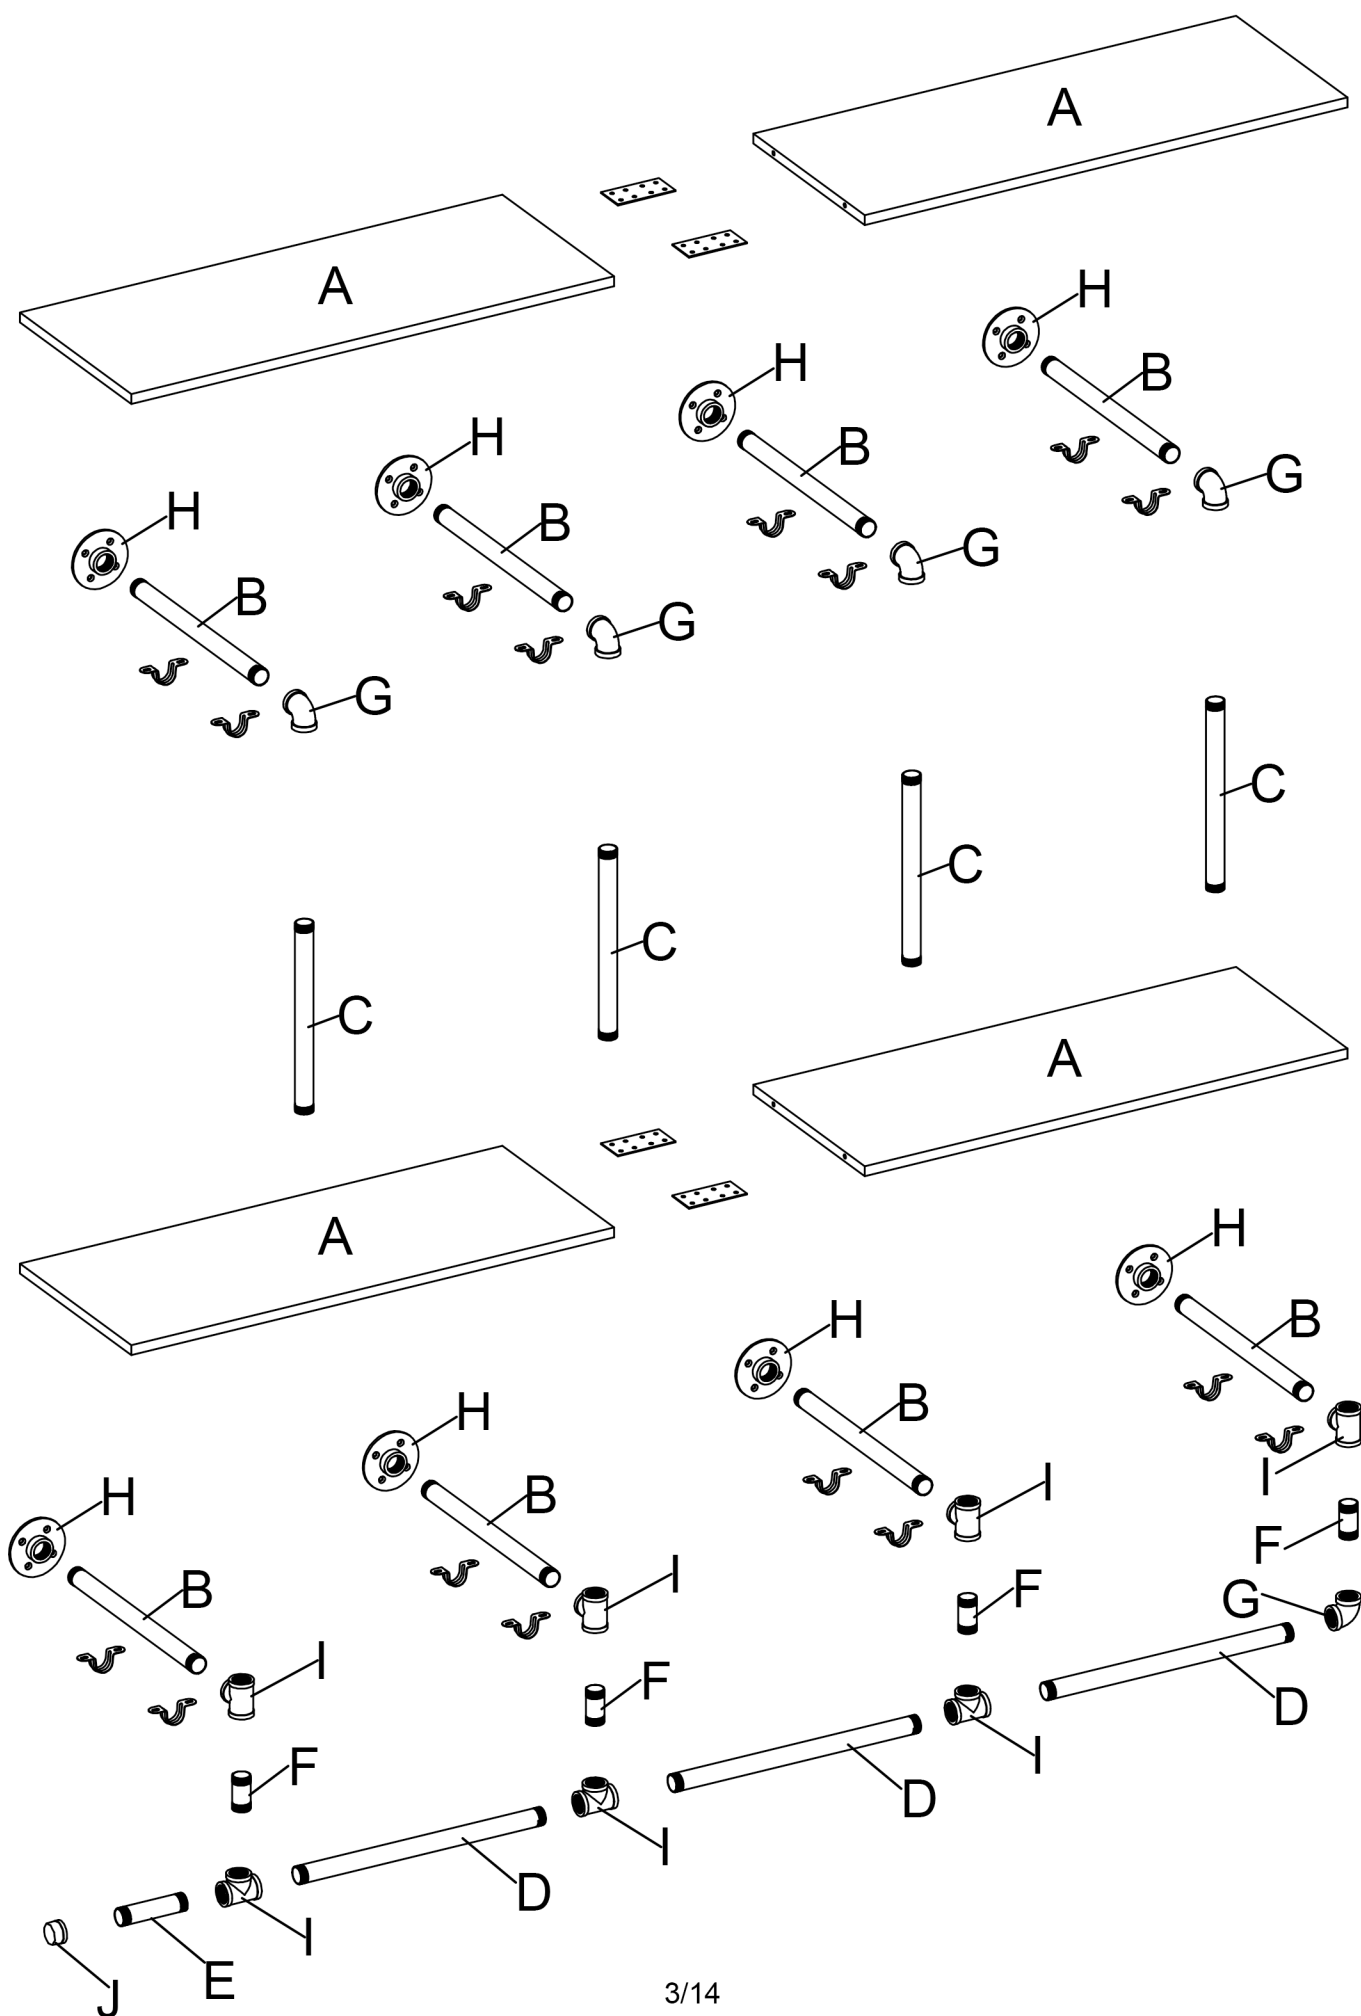

PART LIST			
A x 4pcs 	B x 8pcs  Ø25x330	C x 4pcs  Ø25x280	D x 3pcs  150-Ø25x380 185-Ø25x500
E x 1pc  Ø25x100	F x 4pcs  Ø25x50	G x 5pcs 	H x 8pcs 
I x 7pcs 	J x 1pc 		

HARDWARE LIST			
①  2 pcs	②  M6x30 4 pcs	③  M5x40 32 pcs	④  32 pcs
⑤  72x18x27 16 pcs	⑥  M4x12 32 pcs	⑦  90*45*1.5 4 pcs	⑧  M3x12 32 pcs
⑨  1 pc			

STEP 1

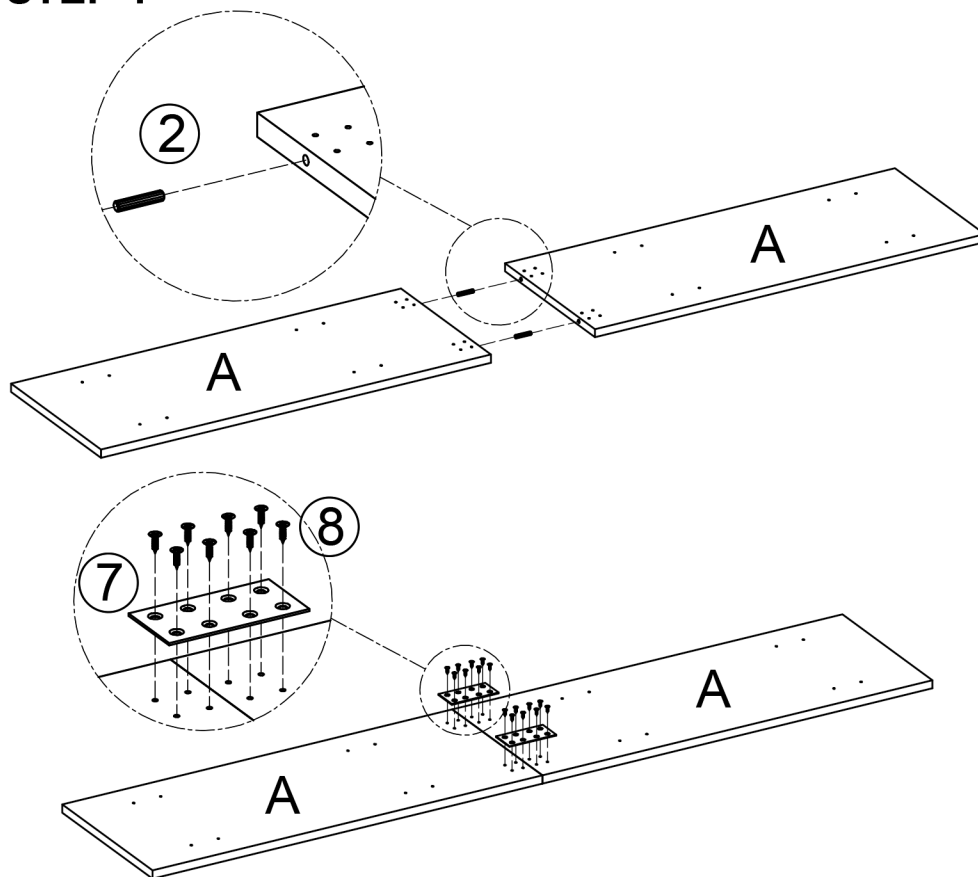


(2)  x2

(7)  x2

(8)  x16

x 2


STEP 2

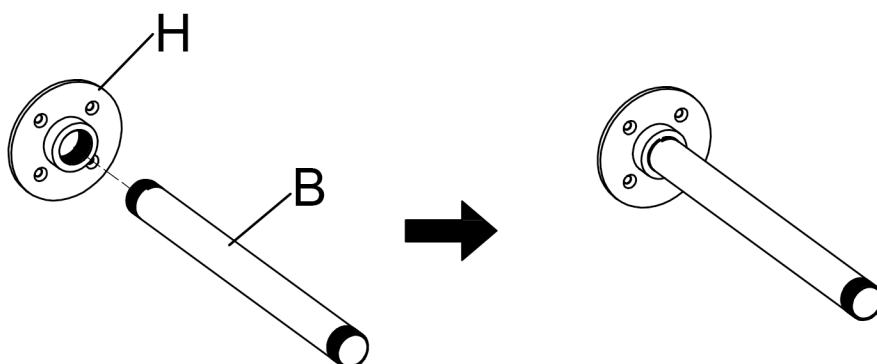

x 8


STEP 3

Use the tape (Part ①) to help you twist the connect part (Part I) at the proper angle if necessary.

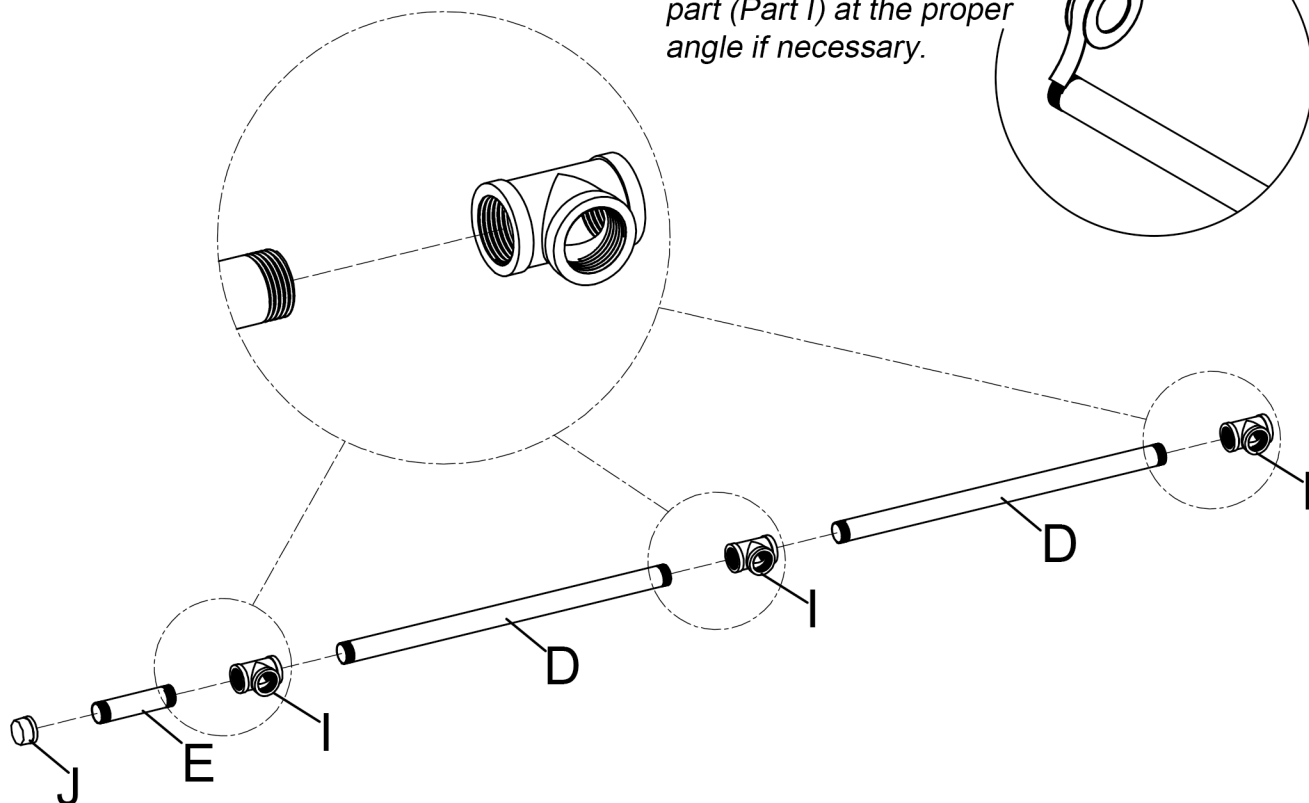


STEP 4


Use the tape (Part ①) to help you twist the connect part (Part G) at the proper angle if necessary.

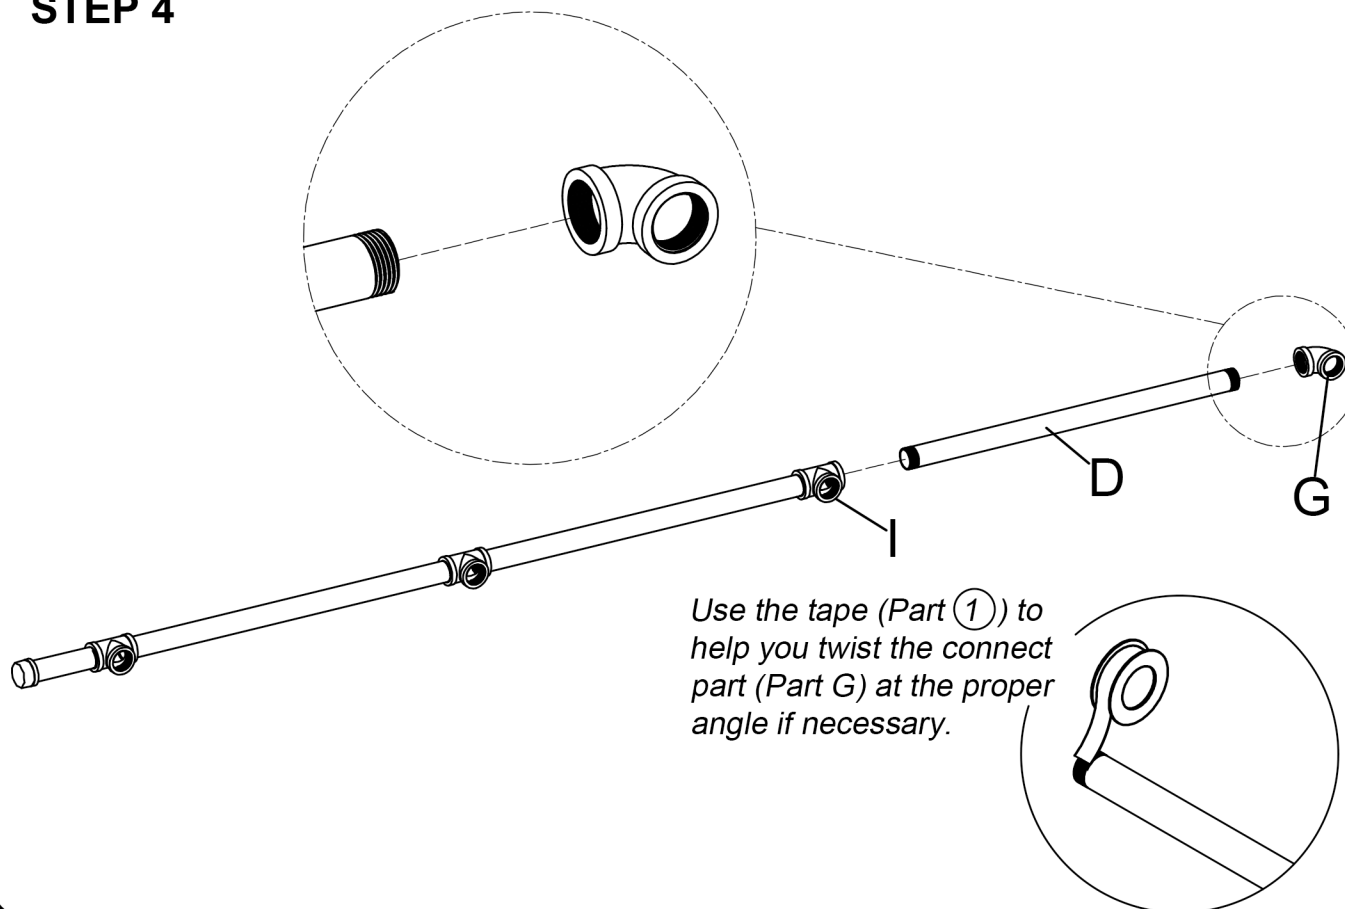


Option A




STEP 5

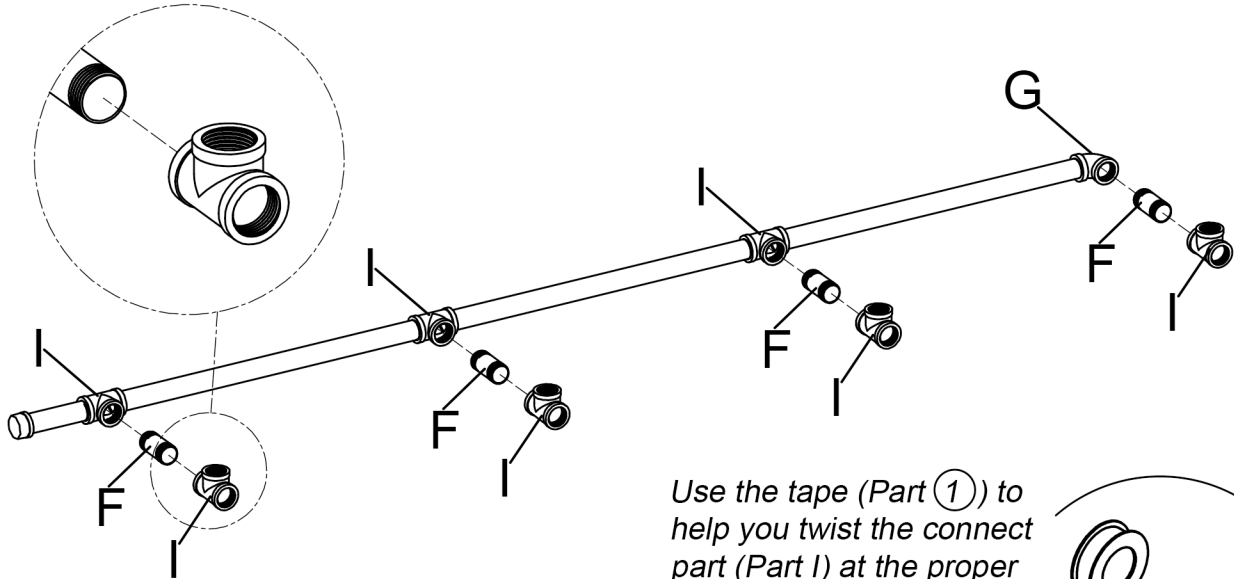



Use the tape (Part ①) to help you twist the connect part (Part I) at the proper angle if necessary.





STEP 6

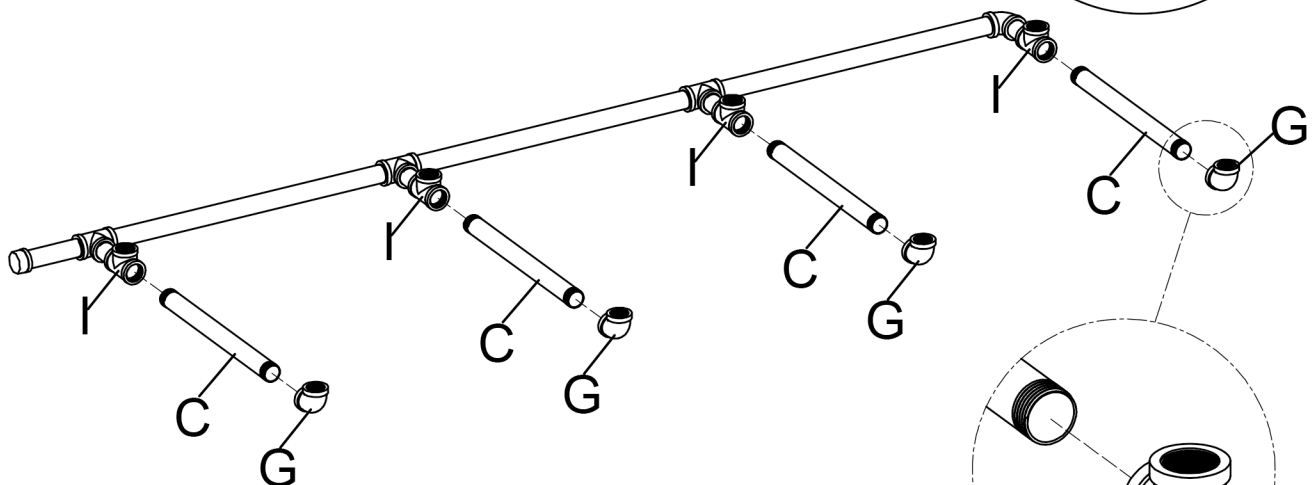

Use the tape (Part ①) to help you twist the connect part (Part G) at the proper angle if necessary.






STEP 7

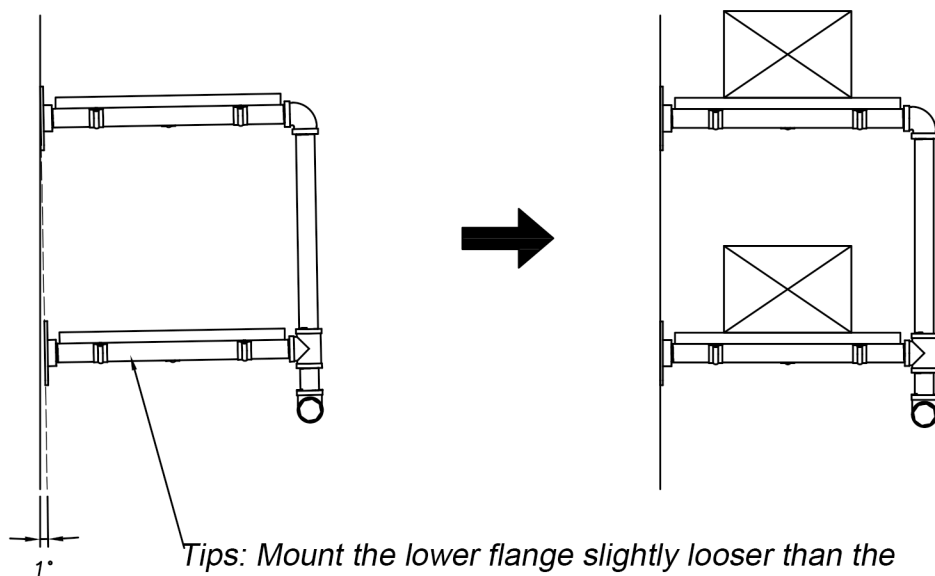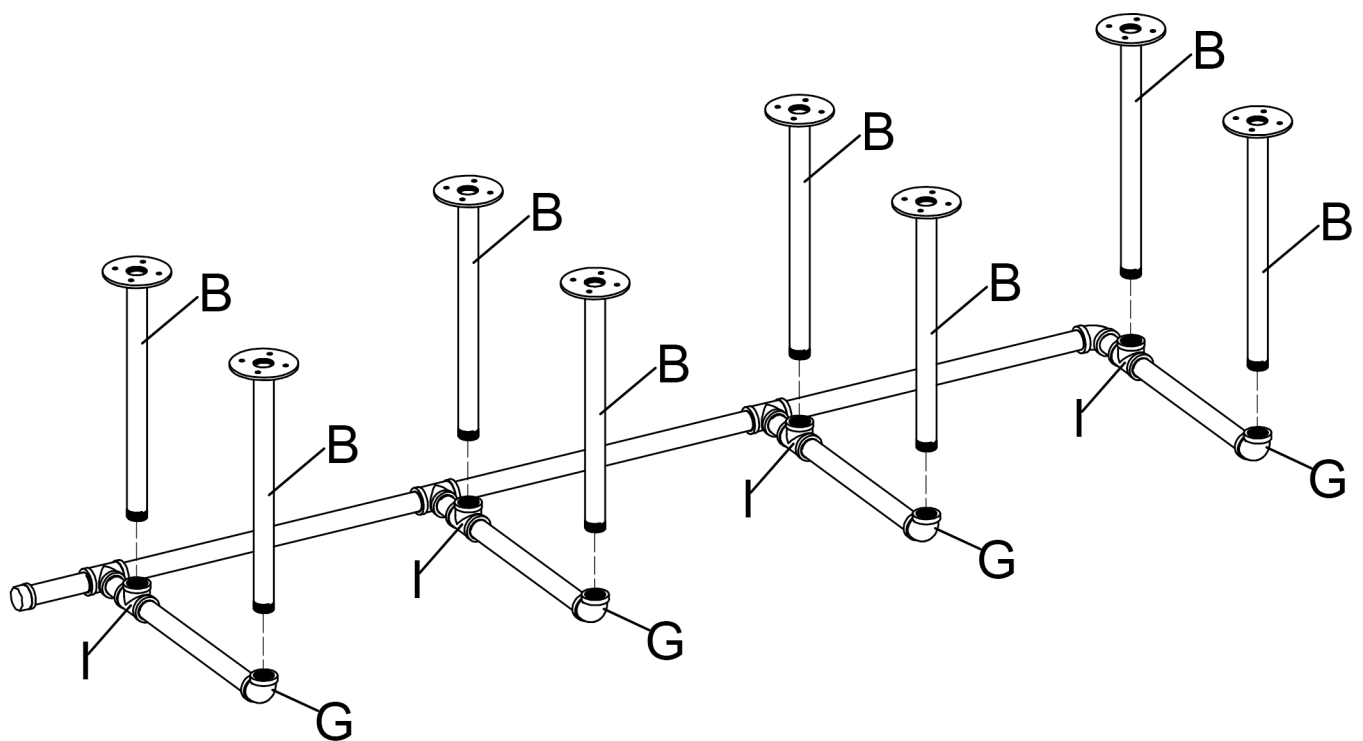

Tips: Mount the lower flange slightly looser than the upper flange. In case the shelves don't stay level when they're loaded.


STEP 8

Mount the rack to wall.

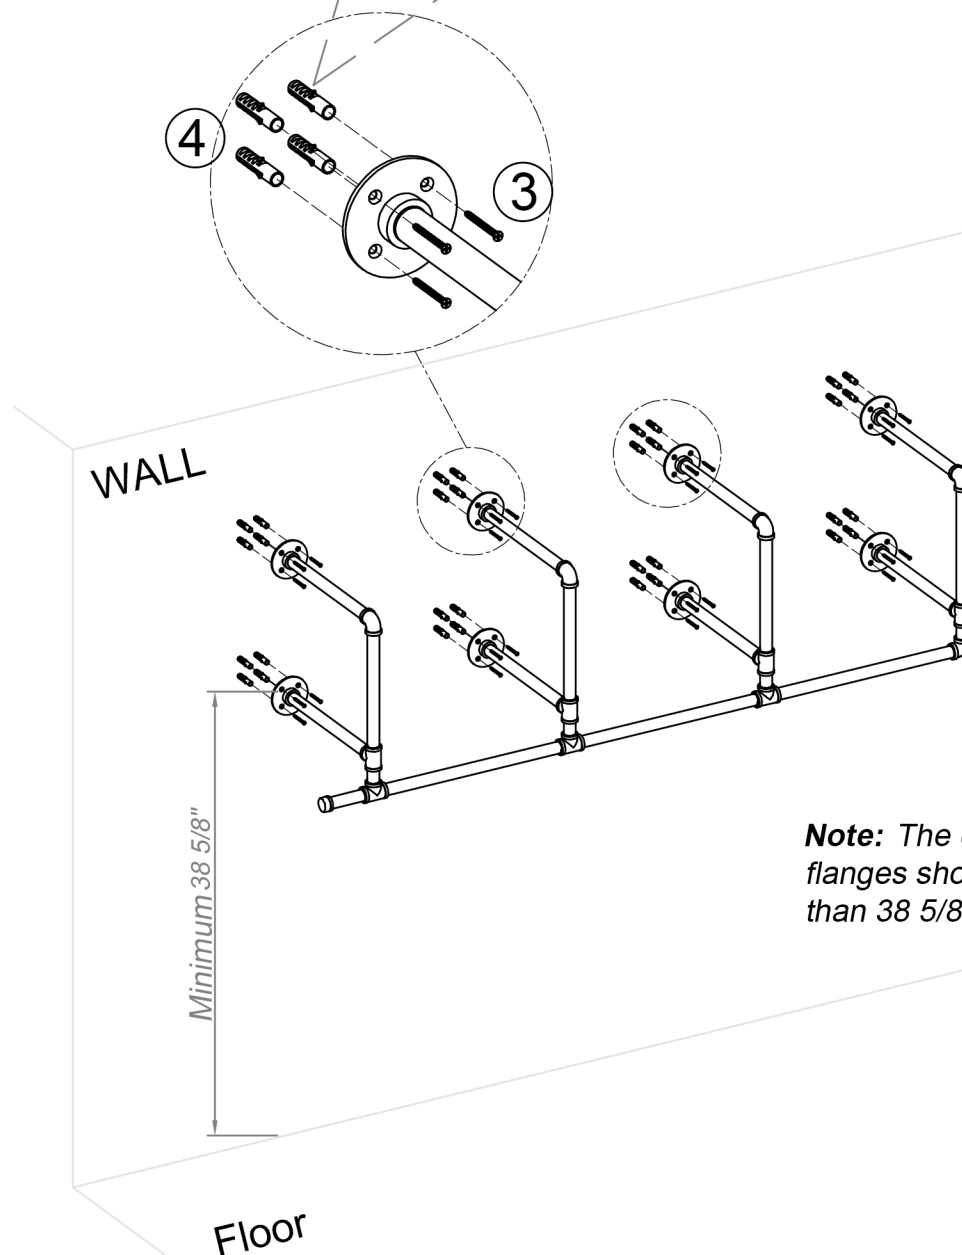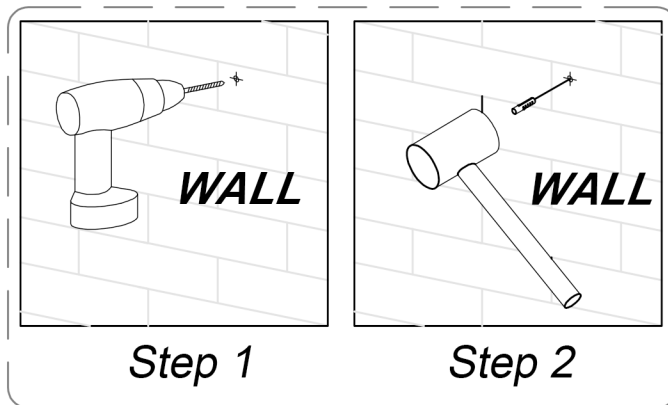


Note: The center of the lower flanges should be no less than 38 5/8 in. from the floor.

STEP 9

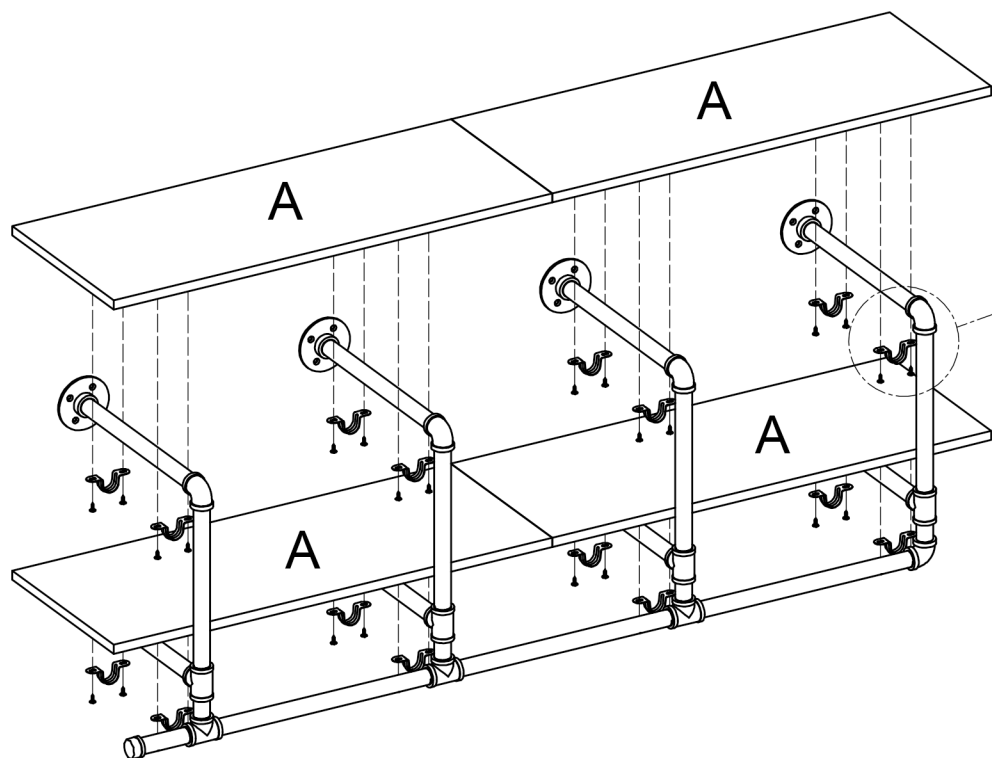


5  x16


6  x32

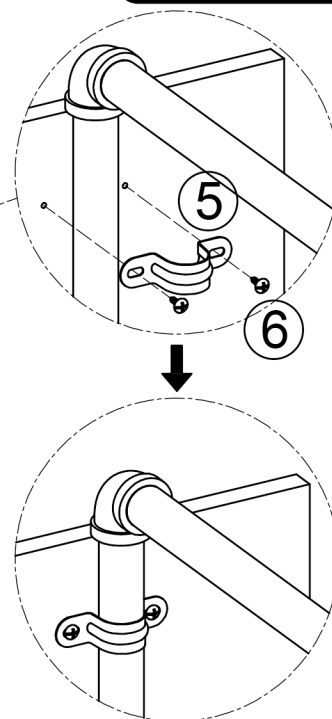


DONE

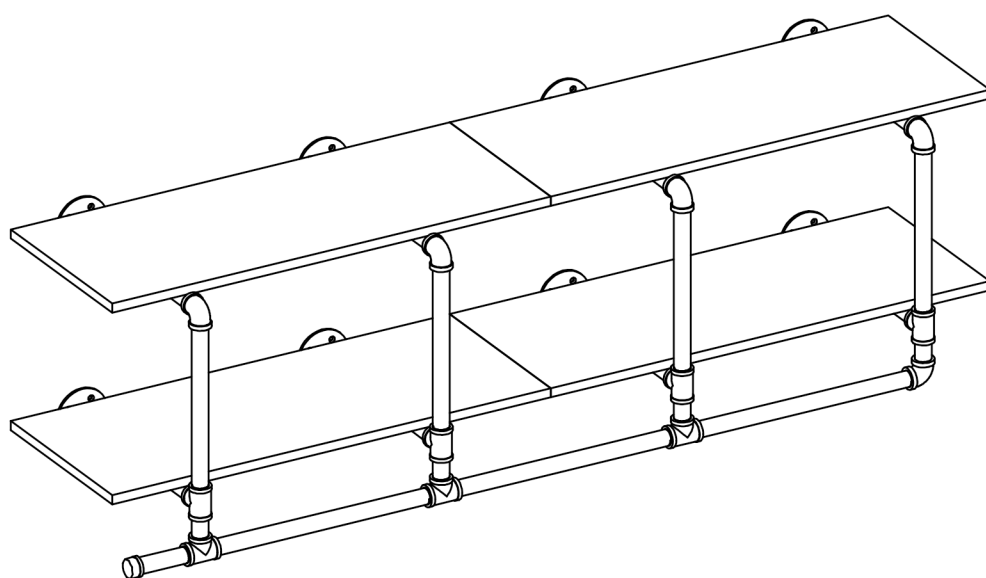


Option B



STEP 5


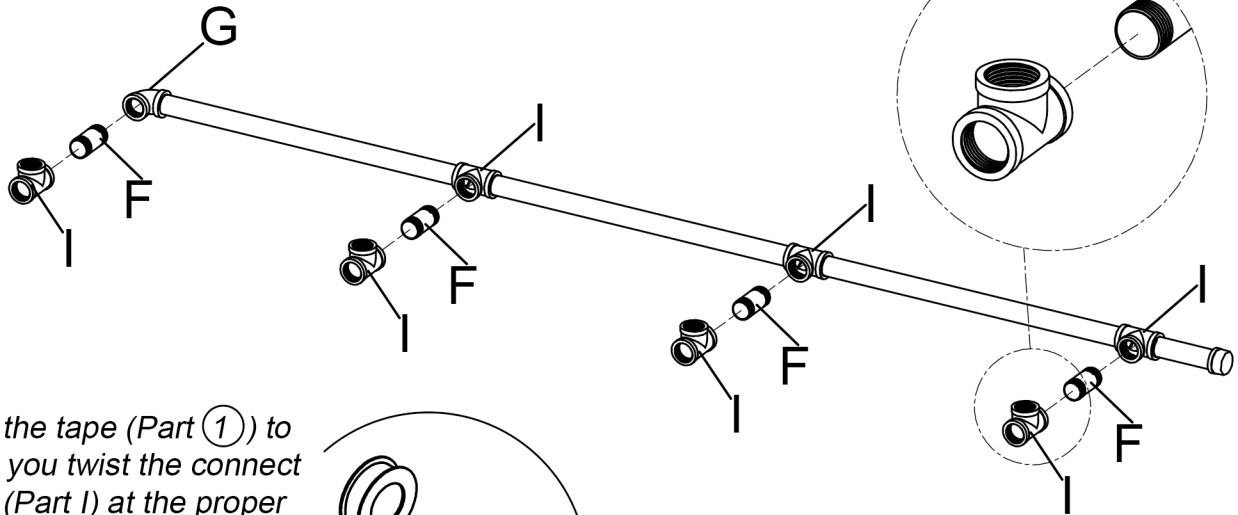


Use the tape (Part ①) to help you twist the connect part (Part I) at the proper angle if necessary.






STEP 6

Use the tape (Part ①) to help you twist the connect part (Part G) at the proper angle if necessary.

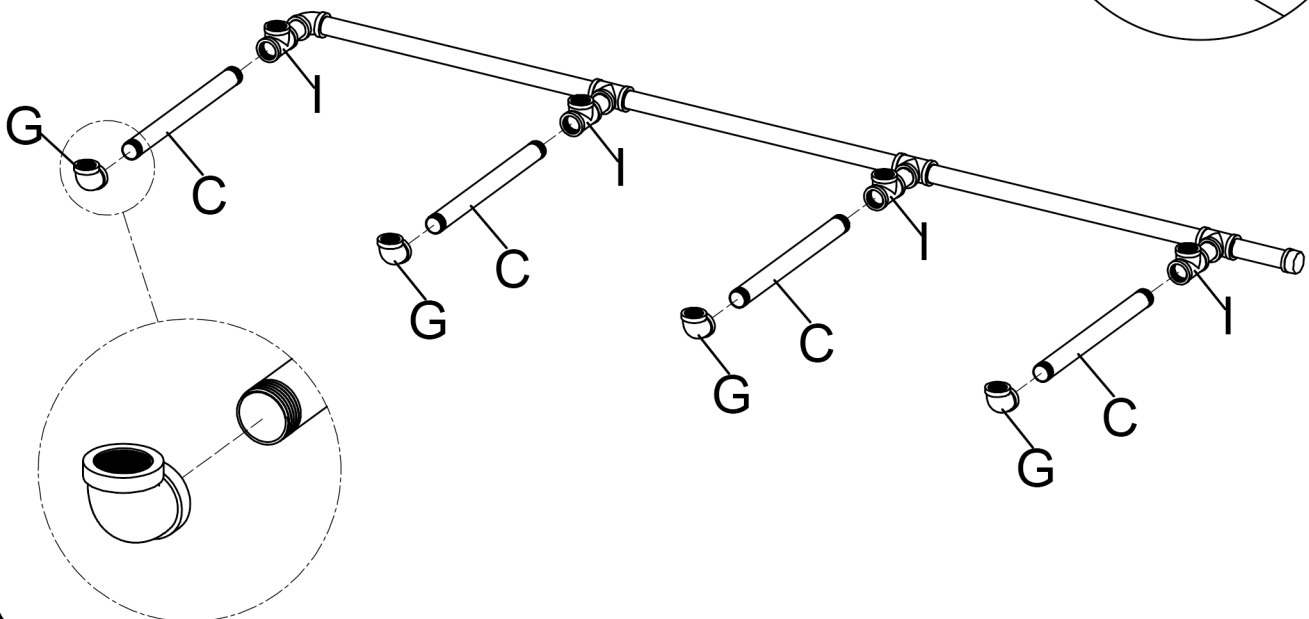




STEP 7

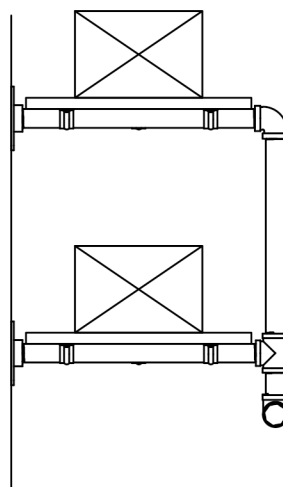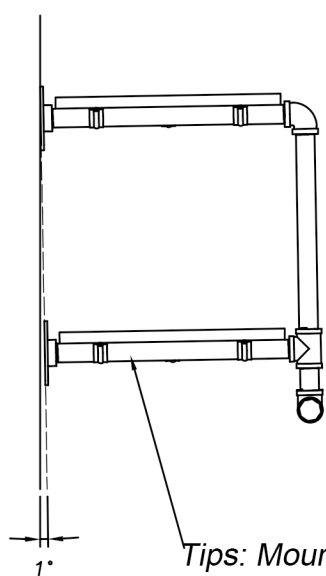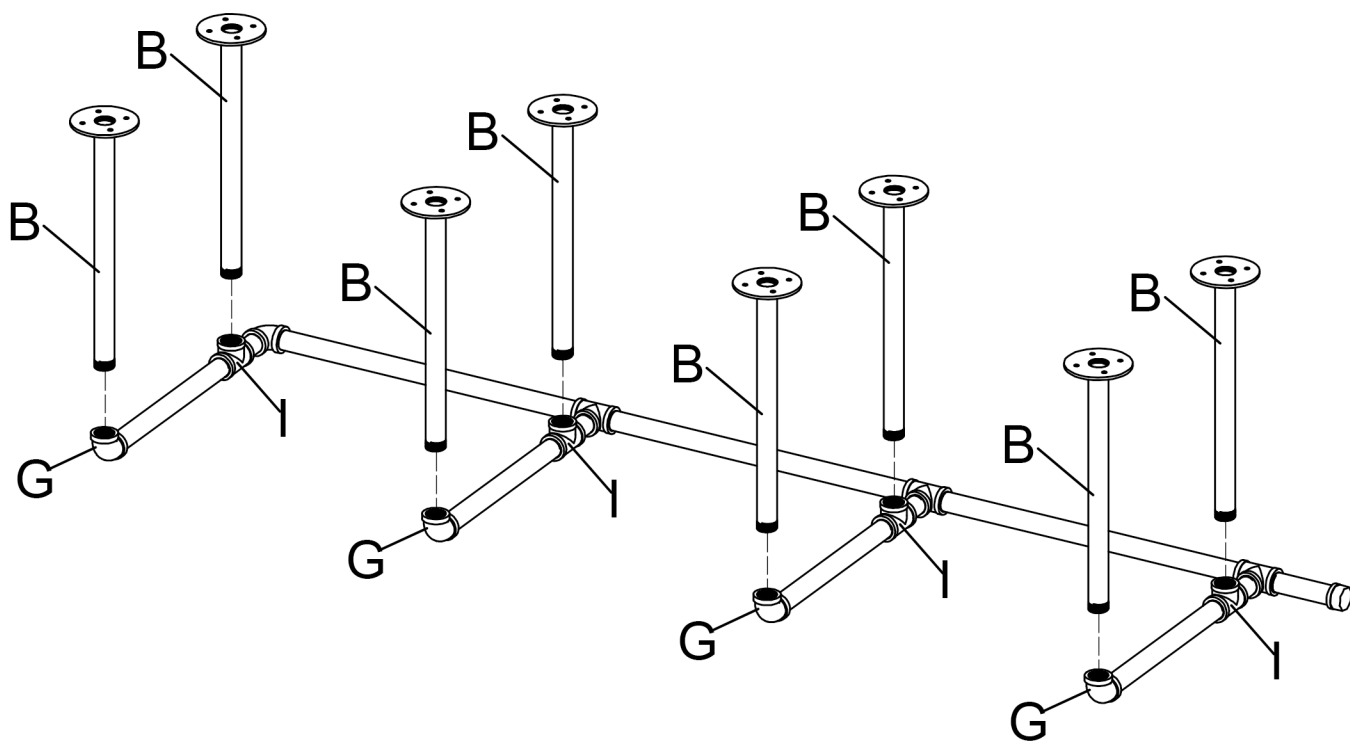

Tips: Mount the lower flange slightly looser than the upper flange. In case the shelves don't stay level when they're loaded.

STEP 8



Mount the rack to wall.

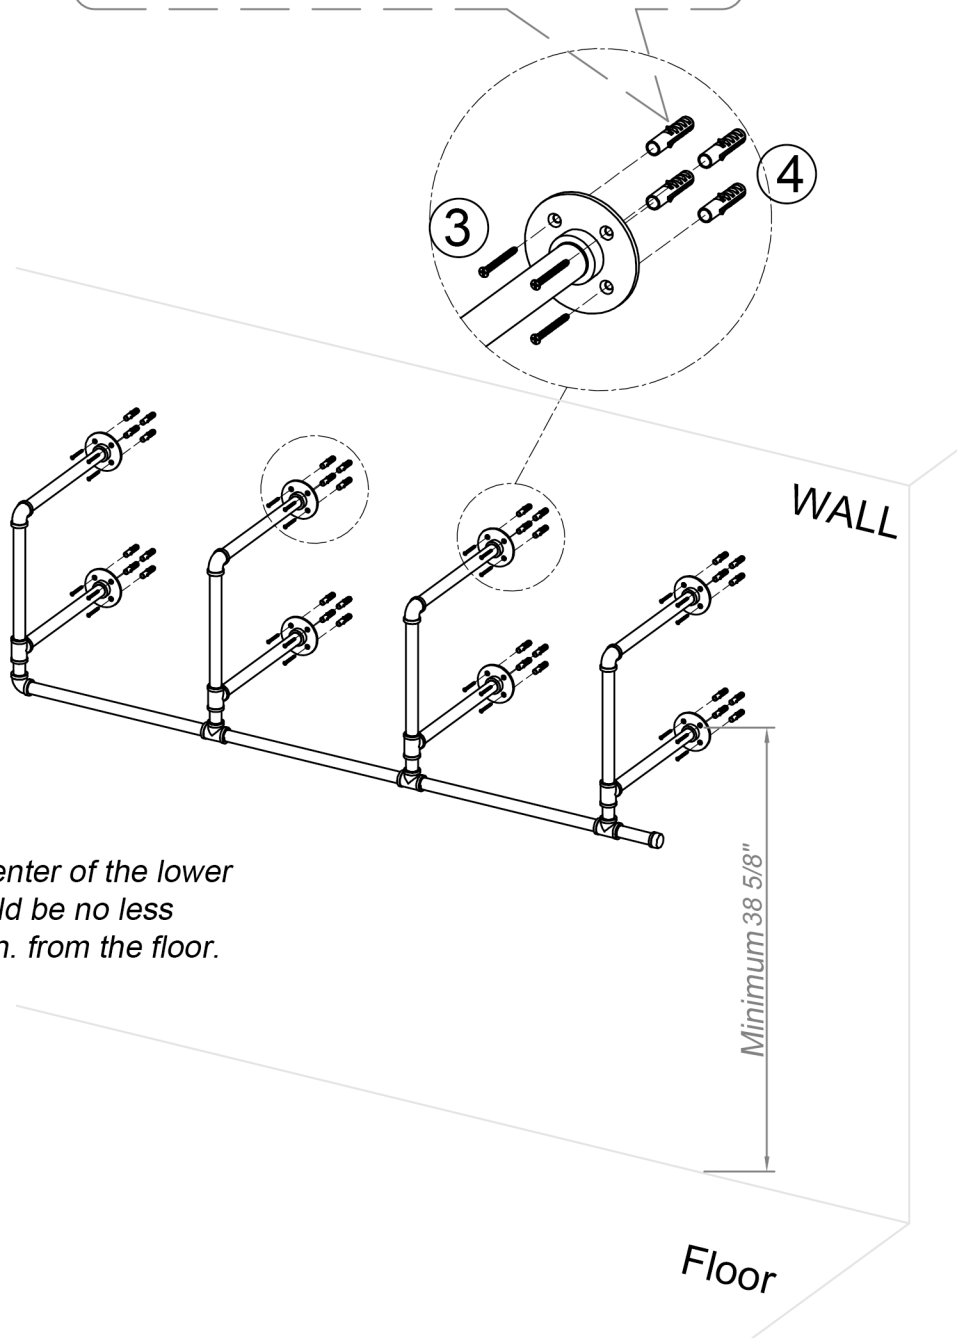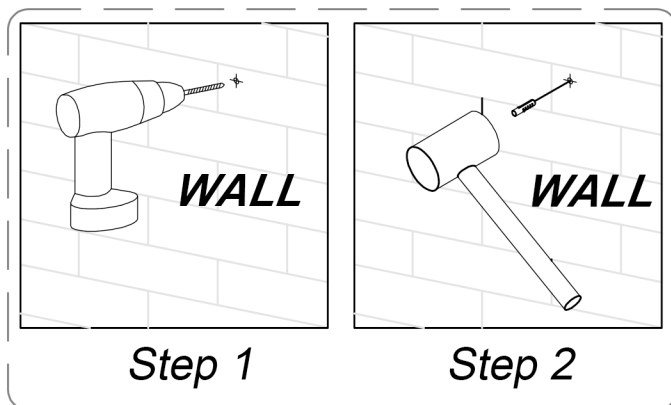

Note: The center of the lower flanges should be no less than 38 5/8 in. from the floor.

STEP 9

- 5  x16
- 6  x32

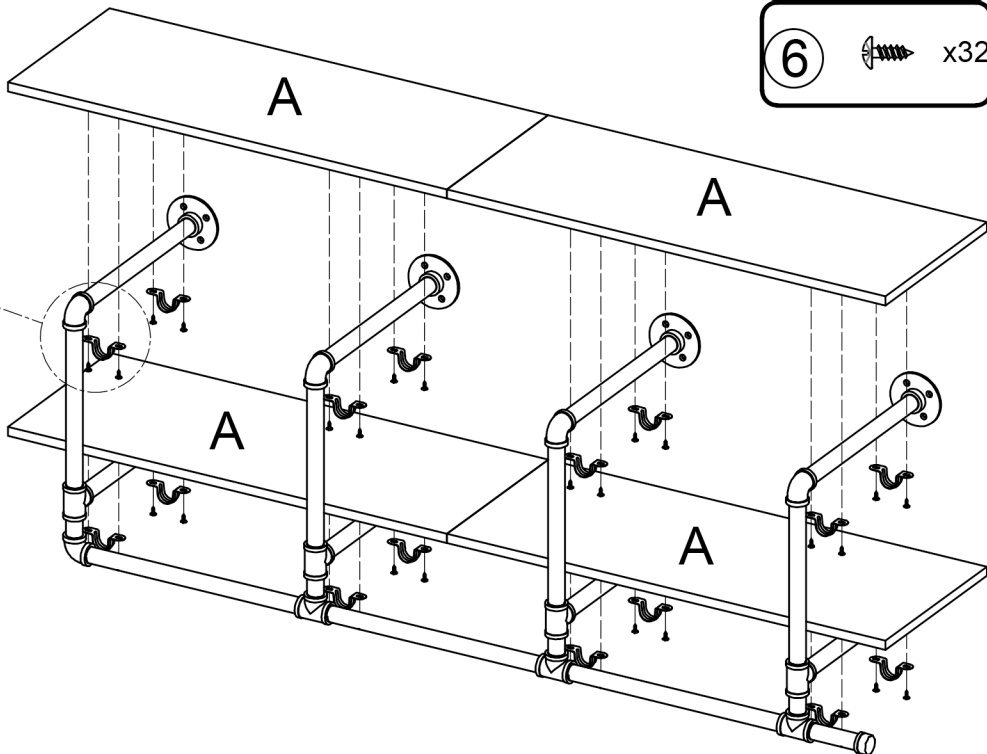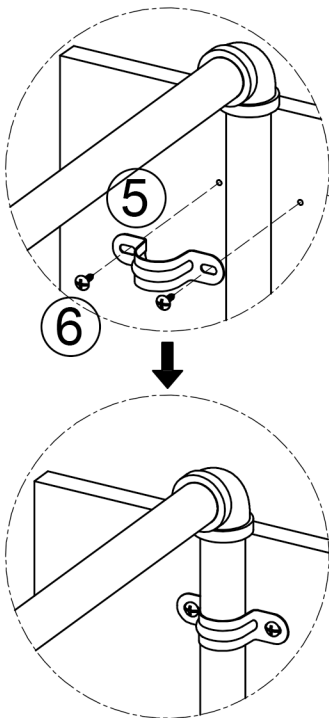

DONE

