


Installation and User Instructions

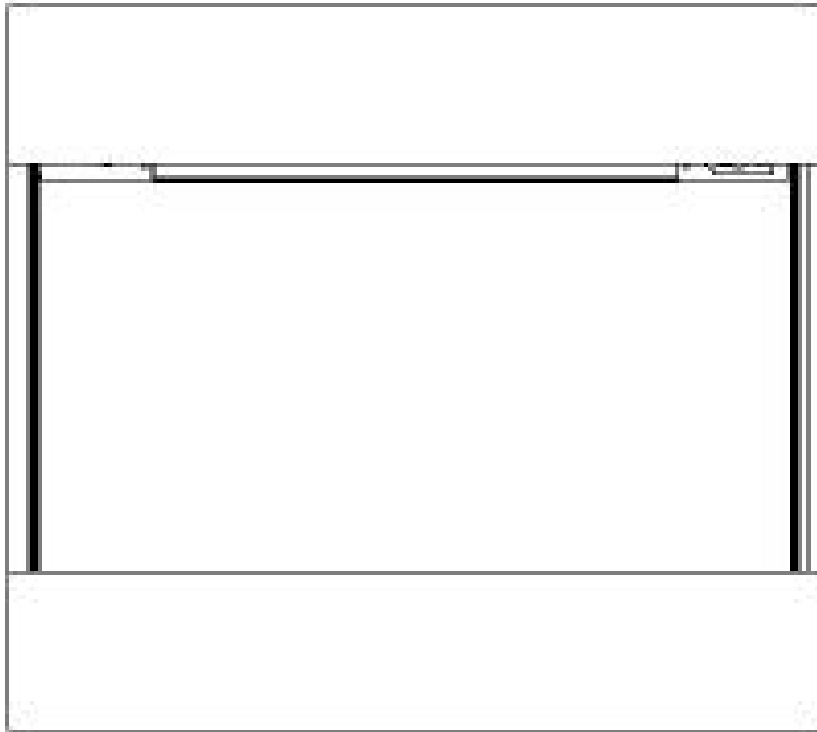

Model: E145S Fireplace Mantle

For use with E145R – 2KW Electric Fire


**PLEASE READ THIS MANUAL BEFORE INSTALLING AND USING APPLIANCE.
INSTALLER: DO NOT DISCARD THIS MANUAL – LEAVE WITH THE CUSTOMER.
SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.**

Appliance Development Services Ltd

Tel 01723 583227

SECTION 1 DIMENSIONS

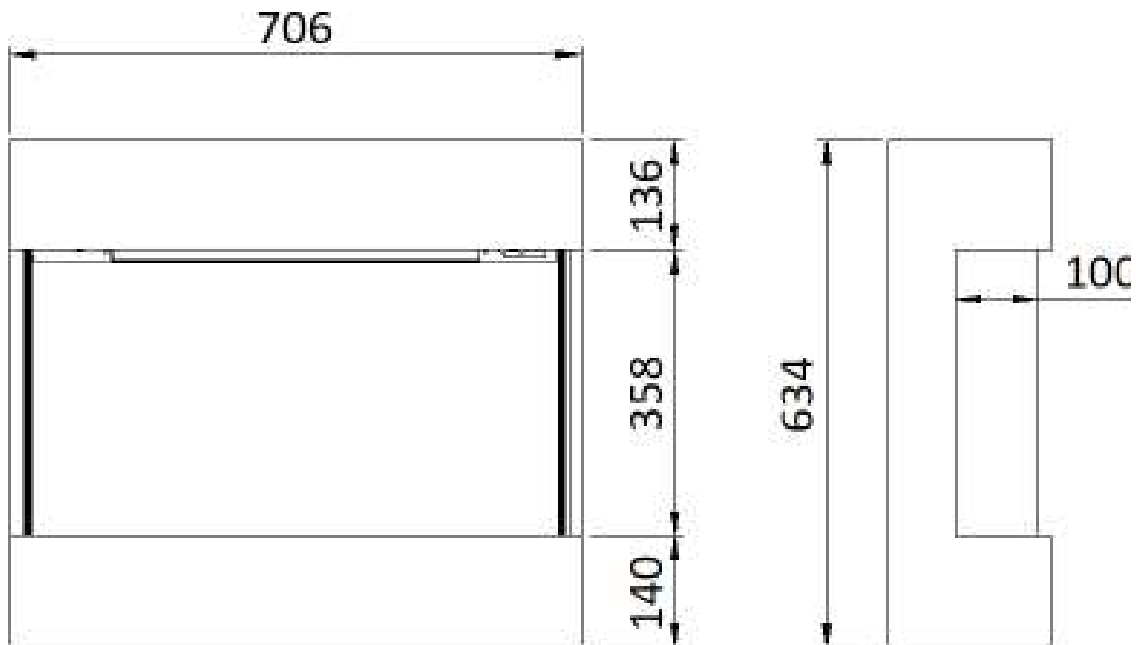









Dimensions in mm



SECTION 2 ASSEMBLY AND INSTALLATION

2.1 Unpack

- Open the package carefully and remove the mantel . Carefully inspect for any damage before you begin assembly.
- Ensure you have all the parts listed opposite before assembling
- Retain packaging for future transport and/or storage
- Please follow all steps carefully.

<p>A.</p>  <p>Mantle(1)</p>	<p>B.</p>  <p>Wall Mounting Bracket (1)</p>	<p>C.</p>  <p>Screw ST4*8 (8)</p>
<p>D.</p>  <p>Screw ST5*40 (8)</p>	<p>E.</p>  <p>Plastic Wall Plugφ8*40 (8)</p>	<p>F.</p>  <p>Screw M5*30 (4)</p>
<p>G.</p>  <p>Washer (4)</p>	 <p>Side Glass (2)</p>	 <p>Glass Retaining Bracket (4)</p>
 <p>Rubber U Channel (4)</p>		

NOTE: Left and right of product are distinguished by its front view.

2.2 Before Installation

Tools required: Magnetic Phillips screwdriver



2.3 Installation


NOTE!

- Assembly required by two adults.
- This fireplace suite must be fitted to the wall. For directions on how to do so, please follow the instructions located in the fire. **Do not use any silicon-based sealant.**
- To avoid over tightening, **do not use** an electric screwdriver.
- Use washers when fixing with screws. **Do not** over tighten bolts.
- Only use the screws supplied with this mantel.

NOTE: Follow these instructions **before** fitting the fire to the wall.
Remove the fire and mantle from all packaging and carefully inspect for any damage before installing.




1. Place the fire on its back and remove the front bottom screw on both sides of the fire. Keep both screws aside for later as these will be used for the top brackets.
(see image attached)

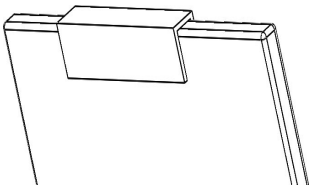

2. Take 1x glass panel and 2x rubber U channel pieces and place one rubber U channel piece over each short edge of the glass.



3. Take 1x glass retaining bracket and slot over the rubber U channel. Once this is done place the fire on its side and attach the glass retaining bracket towards the top of the fire first using 2x ST4*8 screws.

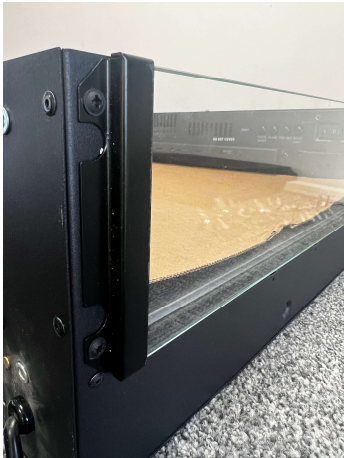

4. Take the second glass retaining bracket and attach to the bottom of the fire. Please repeat steps 2-4 for the opposite side.




5. Remove the 2 screws holding the LED cover plate and put the plate aside. pull the LED cable out then replace the cover with the LED protruding through the half circle gap.



6. Lay the fire flat on its back and slide the mantle over the top



7. Take the screws removed in step 1 and use these to attach the top brackets to the fire as shown in the picture opposite.

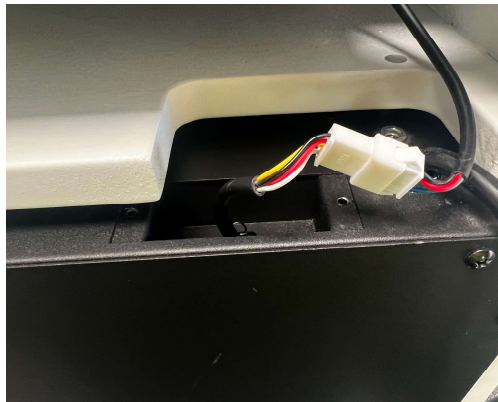

8. Holding the back of the fire, tilt the mantle up onto its top, and connect the LED cable from the fire to the LED cable on the mantle



9. Using the M5X30mm screws and washers, attach the base of the fire to the mantle as shown. There are 4 holes in total. Once this is done, please follow the steps located inside the fire manual to attach fire to the wall.

SECTION 3 CLEANING & MAINTAINENCE

Your mantle surface coating will give off a slight odour for a brief initial period. Try to ventilate as much as possible during this time.

Daily cleaning:

- Clean the mantel surfaces with a soft, lint-free cloth.
- Do not use cleaning or polishing products

Avoid

- Long-term direct sunlight.
- Excessive temperatures and humidity to protect the life of your furniture surface
- Do not put heavy or sharp objects on this mantel