






# JACKIE SIX LIGHT CHANDELIER

## General Product Information



## Suggested/Required Tools



## Safety Information

### CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

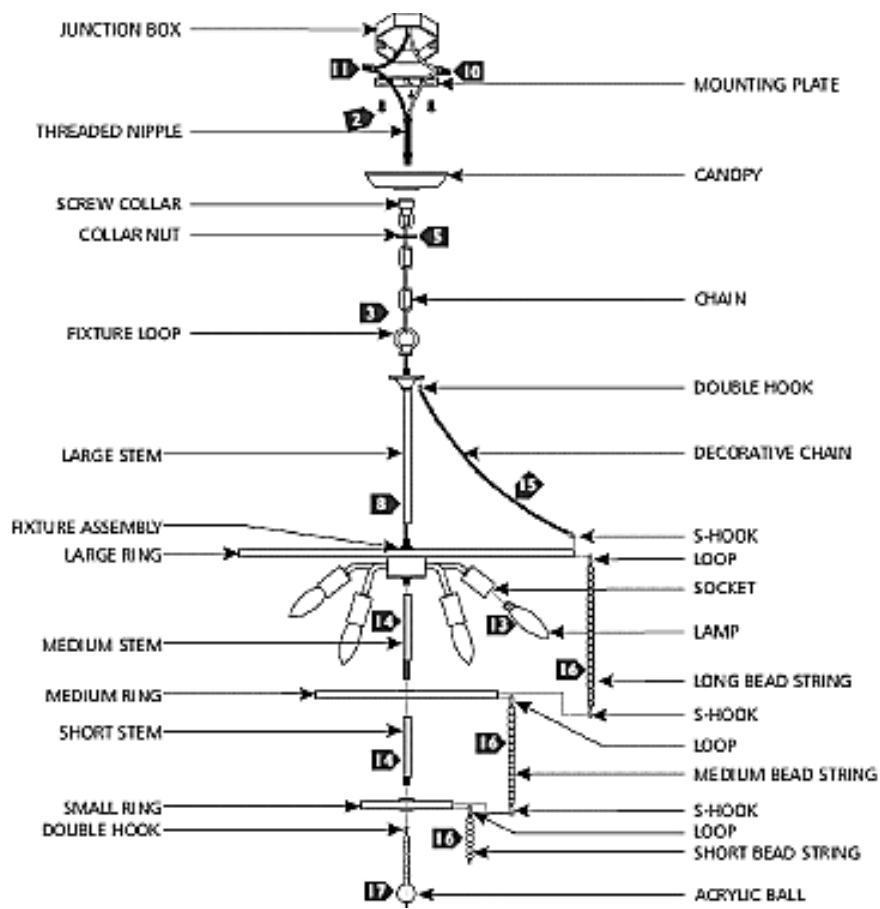

## INSTRUCTIONS

### I. Preparing the Fixture

1. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
2. Secure the mounting plate to the junction box.
3. Determine the desired height of the fixture and remove a portion of the chain by opening a link with pliers.
4. Open the chain link with pliers and install the chain onto the fixture loop. Close the chain link.
5. Unscrew the collar nut from the screw collar. Install the collar nut and the canopy onto the chain.
6. Open a link on the other end of the chain with pliers and install the chain onto the screw collar to secure the fixture. Close the link with pliers.
7. Weave the cord through the chain, canopy, collar nut, screw collar, threaded nipple, and out of the junction box. Trim the cord, leaving enough length to make electrical connections.
8. Screw the large stem onto the fixture assembly. Screw the chain onto the large stem.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black, smooth) to hot power line wire
  - b) Neutral fixture wire (white, textured) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

### III. Installing the Fixture

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.
2. Screw the lamp into the socket. Refer to the socket label for max wattage information.
3. Screw the medium stem onto the bottom of the fixture assembly. Screw the medium ring onto the medium stem. Screw the short stem onto the medium stem and ring assembly, then screw the short ring onto the bottom of the short stem.
4. Install the decorative chains by pushing the double hooked end into the holes in the top of the large stem. Hook the "S" hook into the top of the large ring.
5. Install the acrylic bead strings by hooking the loop to the bottom of the corresponding ring: long string to the large ring, medium string to the medium ring, and short string to the small ring. Hook the S-hooks of the long and medium strings to the rings below them.
6. Install the acrylic ball by pushing the double hook into the bottom of the small ring.