

ASSEMBLY INSTRUCTIONS

Disclaimer:

Thank you for your purchase. Please read carefully and keep these instructions, as you may need them later. We suggest installation by a **licensed electrician**.

Beware of potential electrical shock! Before installing the fixture or removing any other light already present, please turn off the main power at the circuit breaker.

If your product contains glass items, please handle with care, as glass is fragile and can lead to injuries if handled incorrectly.

Please keep in mind that the warnings and instructions present in this document are not meant to cover and prevent all possibilities and situations that could lead to injury or damage. It is the responsibility of the end-user to exercise caution and common sense when handling and installing the product.

All electrical connections must be made by qualified personnel in accordance with the National Electrical Code.

Please refer to the table below for electrical connections:

Fixture wire markings:

"L" Live wire (Black or Brown)

"N" Neutral wire (White or Blue)

"⊕" Ground wire (Bare copper or Green)

AC power equivalent:

"L" Live wire (Black)






"N" Neutral wire (White)

"⊕" Ground wire (Bare copper or Green)

Note: Select the type of installation you require before assembly and installation:

This luminaire can be installed as a Pendant or Close to Ceiling.

Refer to the corresponding instructions and diagram for the different installation methods.

Tools Required: (not included)				
				
Step Ladder	Phillips Head, Flat Blade Screwdrivers	Electrical tape	Wire Cutter/Stripper	Plier

Pendant lamp Installation instructions:

IMPORTANT SAFETY INSTRUCTIONS:

The ceiling must have at least the capacity of 5 times the weight of the ceiling light (64 lbs.). For this light, a minimum ceiling capacity of 320 lbs. is required. The manufacturer and distributor accept no liability for incorrect installation.


This fixture must be mounted to the ceiling independent of an outlet box. Your ceiling may require modification to allow the mounting plate to be secured to a structural member. This fixture **MUST NOT** be secured using any type of hollow ceiling anchor, such as a toggle bolt.

Step 1: Have a professional contractor reinforce ceiling. Attach the safety cable to ceiling beam through the junction box, then attach the safety cable to the fixed fixture on the ceiling and secure with nut locker.

Step 4. Use the two wall bolt(B) secure mounting bracket with hook(A) to the ceiling.

Step 2. Adjustable length of hanging chain. Pass the wire and ground wire through the tube(D), hanging chain, canopy (C), hanger(M), and mounting bracket with hook (A) to the junction box. and Screw the straight tube (D) into the coupling nut (E) and use a wrench to tighten the screw (J).


Step 5. Hang the other end of the tube in the canopy(C) on the hook of the mounting bracket(A), and lock the canopy(C) by the screw (J).

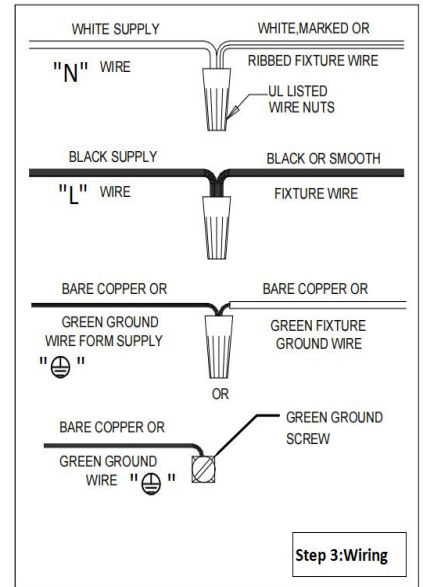

Step 7. Use the buckle to hang the crystals (G) on the holes of the lamp body from bottom to top.

Parts Included:

**G-188PCS+
10PCS(SPARE)**

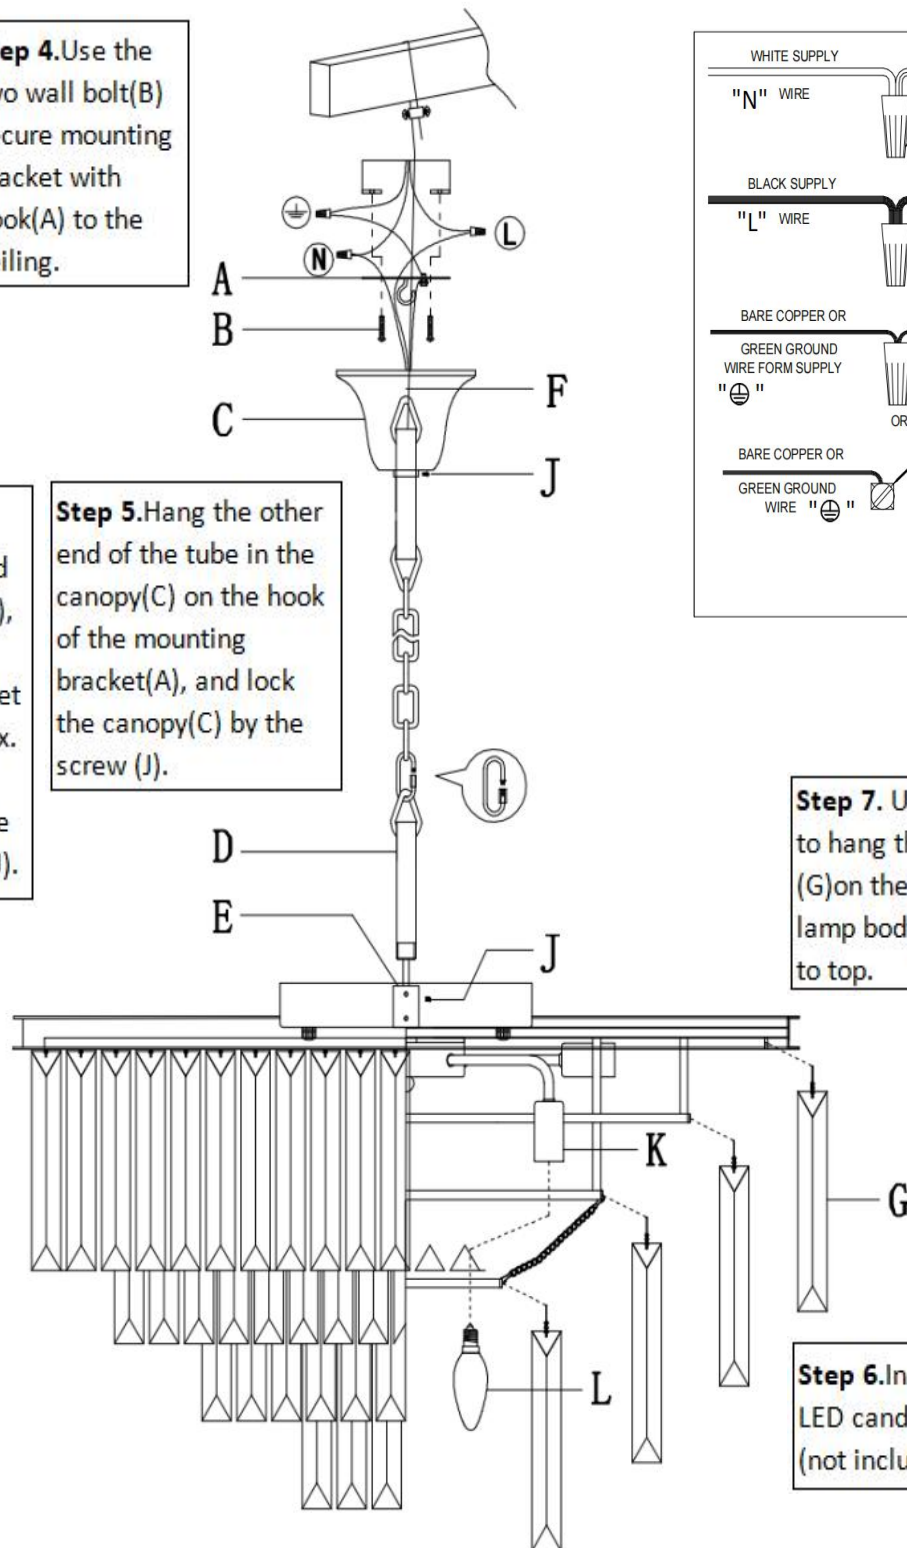

Step 6. Install the E12 LED candle bulbs 8pcs (not included).

Close to Ceiling Installation instructions:

IMPORTANT SAFETY INSTRUCTIONS:



The ceiling must have at least the capacity of 5 times the weight of the ceiling light (64 lbs.). For this light, a minimum ceiling capacity of 320 lbs. is required. The manufacturer and distributor accept no liability for incorrect installation.

This fixture must be mounted to the ceiling independent of an outlet box. Your ceiling may require modification to allow the mounting plate to be secured to a structural member. This fixture **MUST NOT** be secured using any type of hollow ceiling anchor, such as a toggle bolt.

Step 1: Have a professional contractor reinforce ceiling. Attach the safety cable to ceiling beam through the junction box, then attach the safety cable to the fixed fixture on the ceiling and secure with nut locker.

Step 4: Use the screw nut(D) secure canopy(C) to the mounting bracket(A).

Step 3: Use the two screws(B) secure mounting bracket(A) to the junction box on reinforce ceiling.

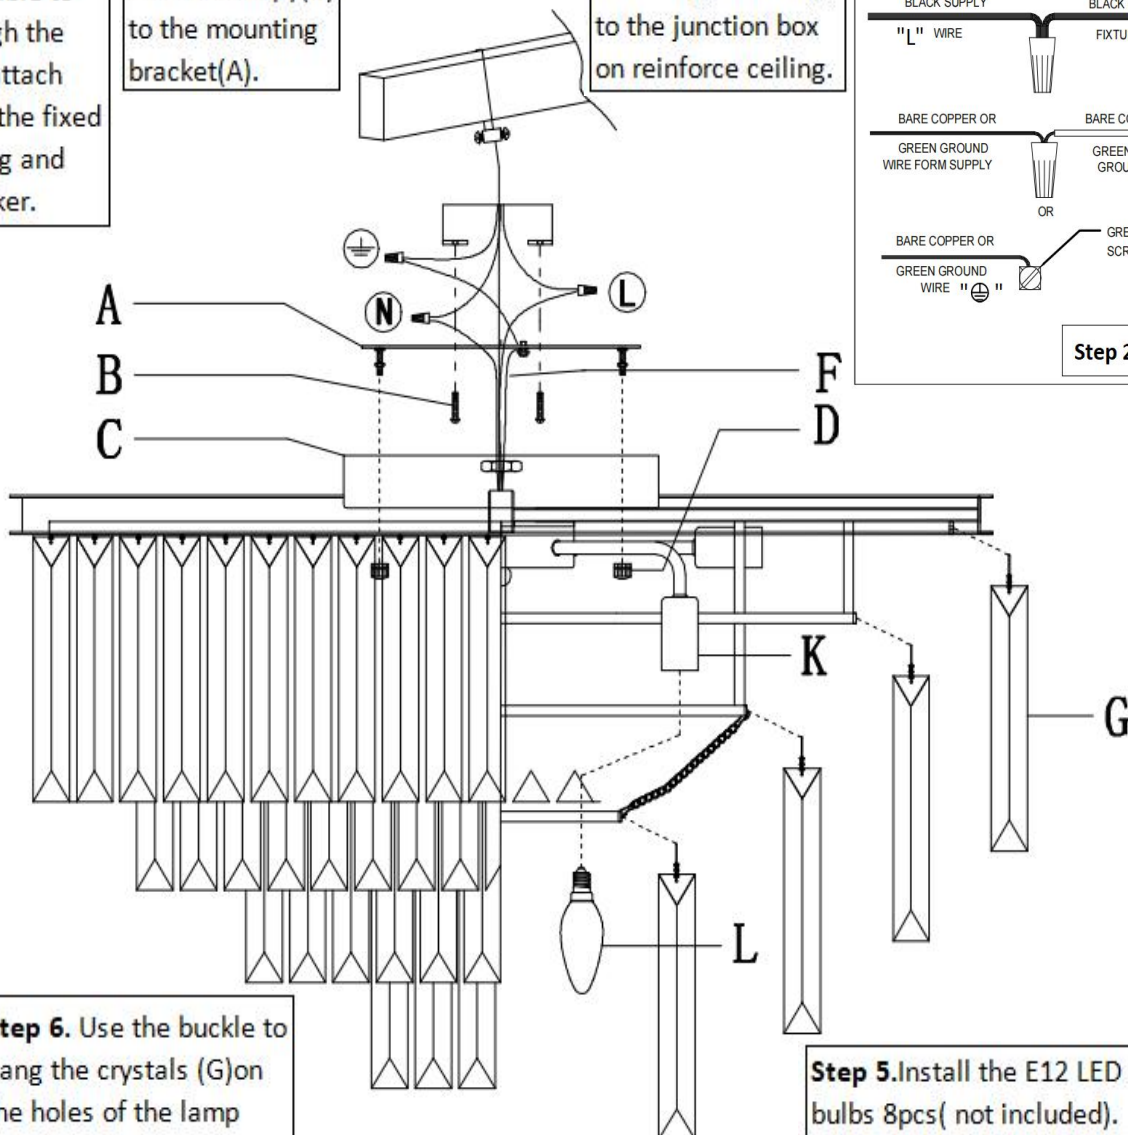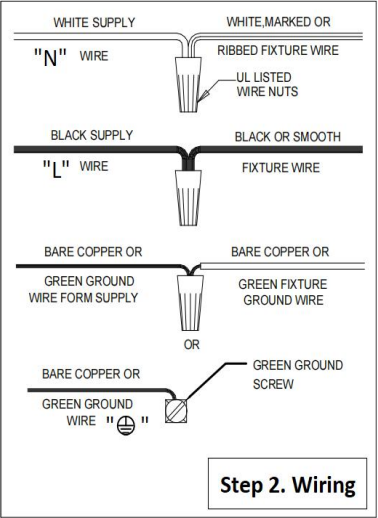

Parts Included:

G-188PCS+
10PCS(SPARE)

Step 6: Use the buckle to hang the crystals (G) on the holes of the lamp body from bottom to top.

Step 5: Install the E12 LED candle bulbs 8pcs(not included).

Warranty

1-YEAR LIMITED WARRANTY

The manufacturer warrants this product to be free from defects in materials and workmanship for one (1) year from the date of purchase. This warranty is valid only for the original consumer purchaser and covers the product under normal use and conditions. If the product is found to be defective, the manufacturer's sole obligation and your exclusive remedy is to repair or replace the product at the manufacturer's discretion, provided it has not been damaged by misuse, abuse, accident, alteration, modification, negligence, or mishandling.

This warranty does not cover labor or any costs associated with the removal or installation of defective, repaired, or replaced products. The warranty excludes damages resulting from misuse, mishandling, misapplication, negligence (including improper maintenance), accidents, incorrect installation, modifications (including unauthorized parts or accessories), or adjustments and repairs.

If you experience damage or missing accessories during the warranty period, please contact our customer service team with your original order number, the quantity of required accessories, and your current shipping address. We will arrange for the free replacement parts as needed.