

SentinelPro™ Diverter Trim, Shower and Tub Package (Valve not included)

## FEATURES:

- CPT-5401: Diverter Shower Valve Trim
- S-2272-E2: 2.0 GPM (7.6 L/min) Flow Rate Shower Head
- S-2500: Shower Arm and Flange
- VS-100-PC: Hand Held Shower with Pause/Trickle Button
- VS-115: Supply Ell with Wall Flange
- S-1554: Tub Spout
- CPT-1183: Transfer Valve Trim (Valve not included)
- 69 in. Metal Stainless Steel Hose

## VALVE OPTIONS:

- CPV-TP-DV: Thermostatic/Pressure Balancing Diverter Valve  
Sweat & Thread Connections
- CPV-TP-DV-PXC: Thermostatic/Pressure Balancing Diverter Valve  
PEX F1807 Crimp Inlet Connections
- CPV-TP-DV-PXE: Thermostatic/Pressure Balancing Diverter Valve  
PEX F1960 Cold-Expansion Inlet Connections
- CPV-TV: Two-Way Diverter Valve  
for use with CPT-1183



## STOCK FINISHES:



PC


## WARRANTY:

Visit [www.speakman.com](http://www.speakman.com) for full product warranty information

- See [Speakman.com](http://Speakman.com) For Warranty Information

Information continues on next page

## SentinelPro™ Diverter Trim, Shower and Tub Package (Valve not included)

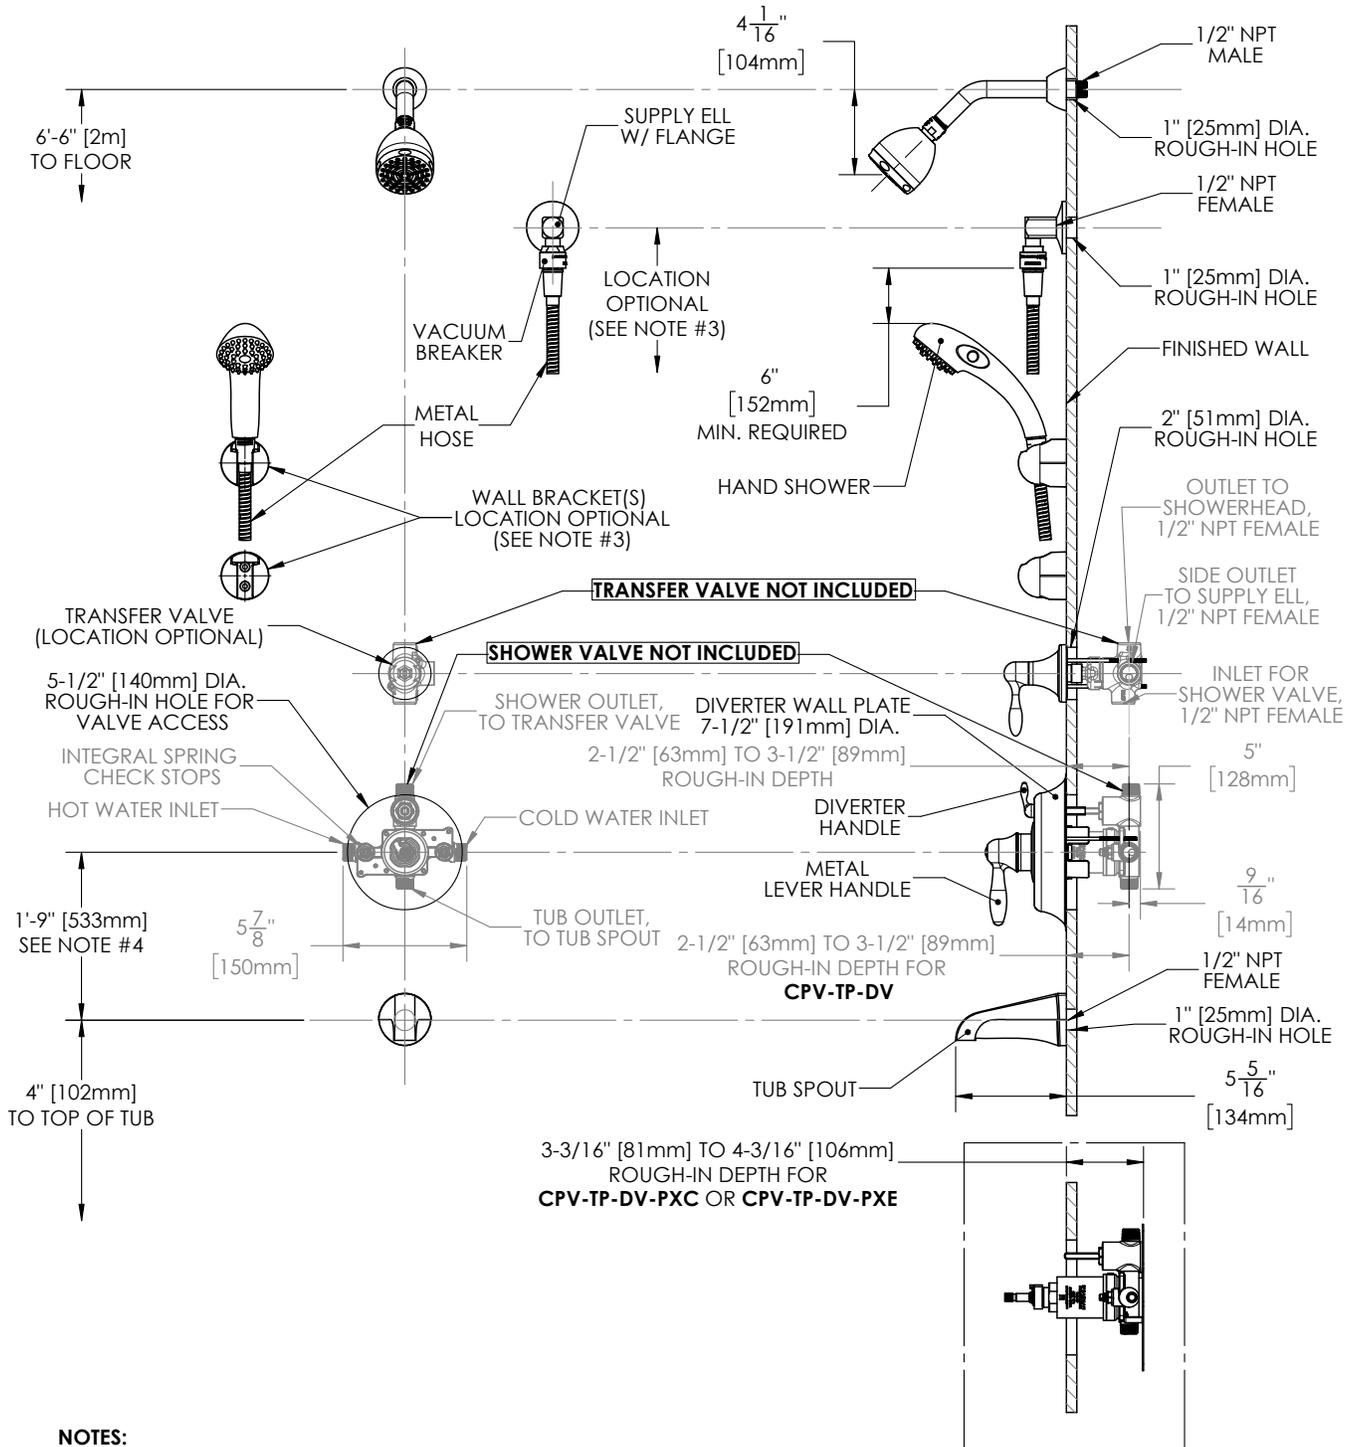

### NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] UNLESS OTHERWISE SPECIFIED AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.
2. UNLESS OTHERWISE SPECIFIED ALL INLETS AND OUTLETS ARE 1/2" FEMALE COPPER SWEAT AND 1/2" MALE NPT.
3. THE LOCATIONS OF THE WALL BRACKETS(2) AND SUPPLY ELL ARE OPTIONAL, BUT RESTRICTED BY THE 69" HOSE LENGTH RUNNING FROM THE SUPPLY ELL CONNECTION TO THE HAND SHOWER AND THE 6' MINIMUM REQUIREMENT BETWEEN THE IN-LINE VACUUM BREAKER AND TOP OF THE HAND SHOWER (HAND SHOWER ADJUSTED TO HIGHEST POSITION).
4. FOR ADA MOUNTING LOCATIONS CONSULT ADAAG, ANSI A117.1, OR STATE REGULATIONS.