


Installation


To avoid scratches and swallowing parts, please do not install by children!

Hardware List		Hardware List	
	1		1
	1		1
	1		1
	4		4
	1		Connecting buckle x1 8x20mm screws x2

- 1** As shown in the figure: Insert the rod into the corresponding positions of the backrest.

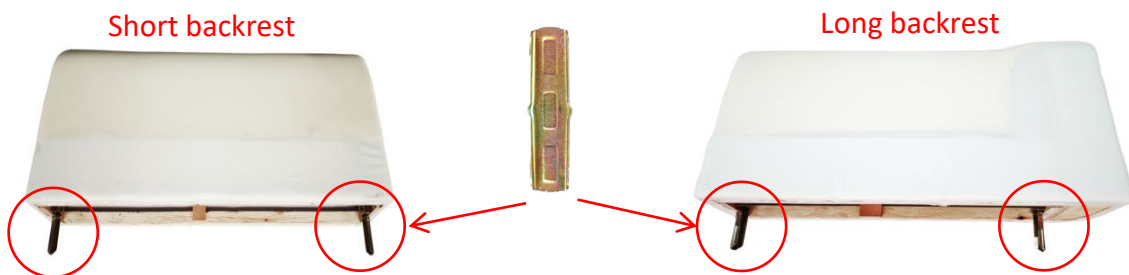

- 2** Cover the hole with a cover plate.

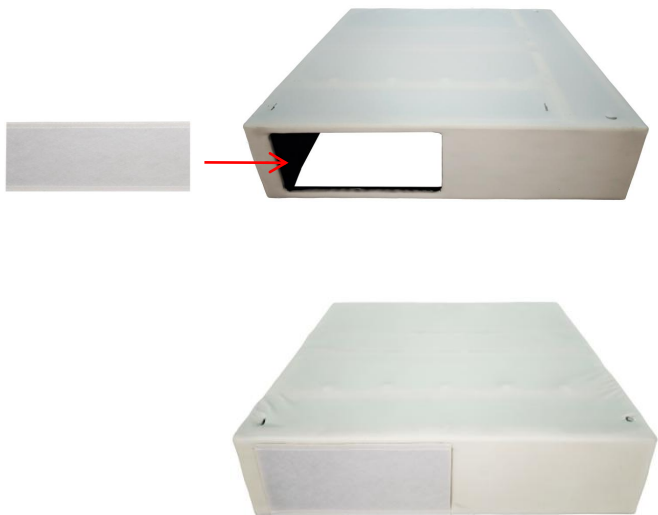

- 3**



3

Put on the sofa cover.

Suggestion: you'd better not remove the protective strip before finish putting the cover on.



4




Secure the legs of the sofa.



5

Place the seat cushion and back cushion.

Note that the side with the zipper on the cushion should face the back.



The seat cushion can be attached using Velcro.



or



6

Apply the connection buckles to connect the seats together(or not, it's totally up to users).

