



MESH CHAIR



INSTRUCTION MANUAL



ASSEMBLY INSTRUCTIONS

- Our clear, easy-to-follow, step-by-step instructions will guide you.
- Do not skip any steps. It is of utmost importance to assemble all parts according to the directions.
- Item identification: For ease of identification, all parts are labeled to correspond to the step number in which the part is used.

IMPORTANT

- Read the following instructions carefully before using the chair.
- Be aware that some parts are heavy and have sharp edges.
- Do not overtighten screws (insert all screws before tightening screws).
- Firmly secure all bolts, screws, and nuts before use.
- Please do not exceed the weight limitations of this item.
- Reconfirm that all bolts, screws, and nuts are secure every 90 days.

CARE & SAFETY

- Always use on firm level ground.
- Keep all children and pets away from the assembly area. Children and pets should be supervised while the product is being assembled.
- Do not use or store this item in the proximity of open flame or flammable/combustible chemicals.
- In case of fire, do not attempt to extinguish any burning polypropylene with water.
- Be very careful when assembling chairs to avoid smashing your hands or fingers.
- Please contact Customer Service if you have any problems or discover any missing parts.




MAINTENANCE










- Wipe the surface with a soft cloth soaked in mild detergent and warm water. Make sure to dry the water in time. Do not use solvents or abrasive kitchen cleaners.
- Vacuum fabric as needed using an upholstery attachment.
- Vacuuming cleans up dust and reduces the need for professional cleaning.
- Do not brush fabric or use a vacuum attachment with a rotary brush.
- Brushing may permanently damage the nap or change the character of the fabric.



If you have any problems
with assembly, please
contact us.




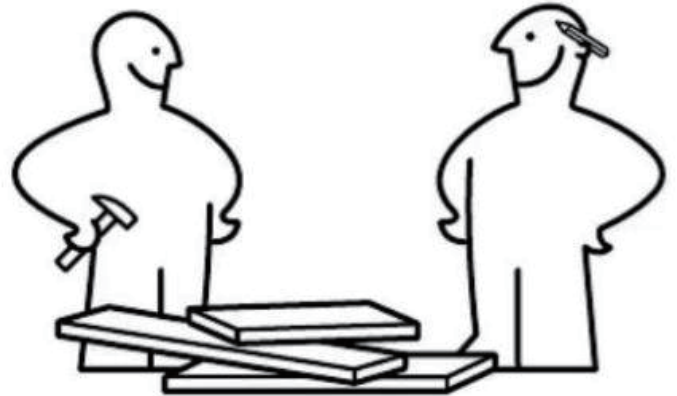


Main Parts

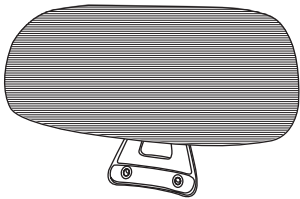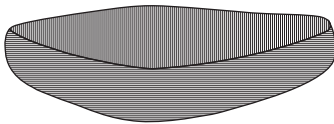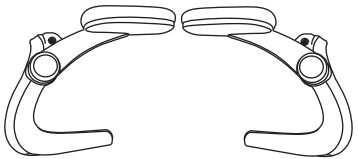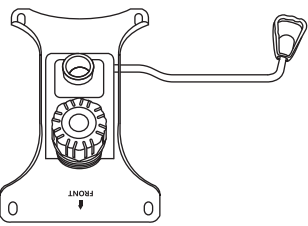
			
A x 1	B x 1	C x 1	D x 2
			
E x 1	F x 1	G x 1	H x 5
			
Pre-installed on G I x 1	J x 5	K x 1	

Erecting Tools

NOTE: We have a spare for each screw.

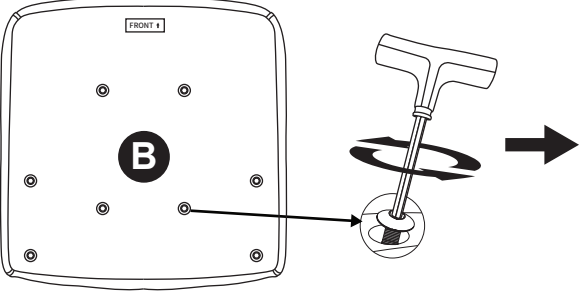
				
M6x16mm ① x 5	M6x20mm ② x 2	M8x25mm ③ x 2	④ x 2	⑦ x 1
Note: some screws were pre-installed in the seat to prevent missing in transit. Please take it off before assembling. 				
				
		M6x20mm ⑤ x 4	M6x35mm ⑥ x 4	

STEP 1

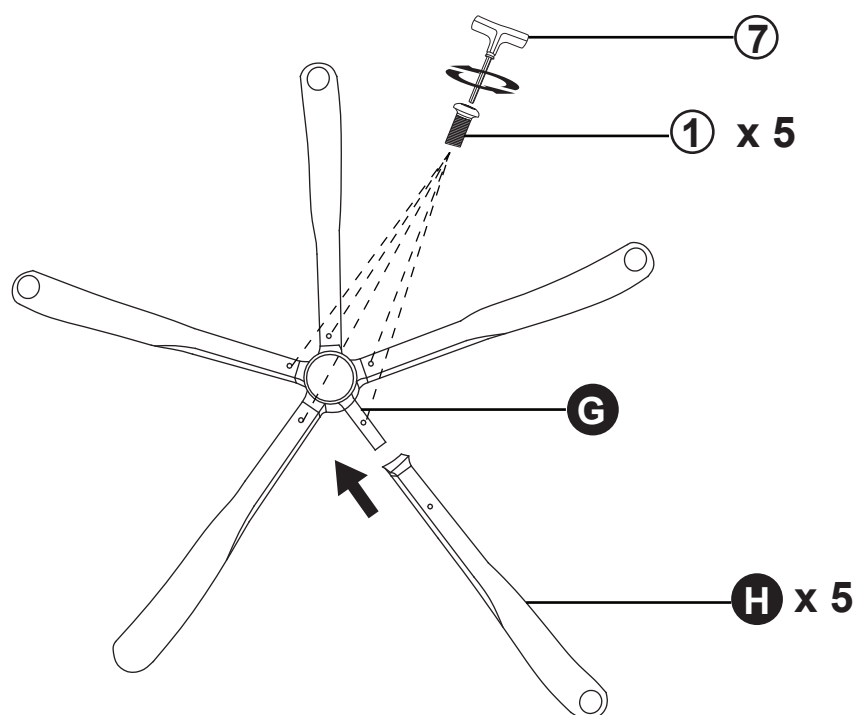



STEP 1: Connect the detachable feet of the chair to the base and tighten the screws.

STEP 2

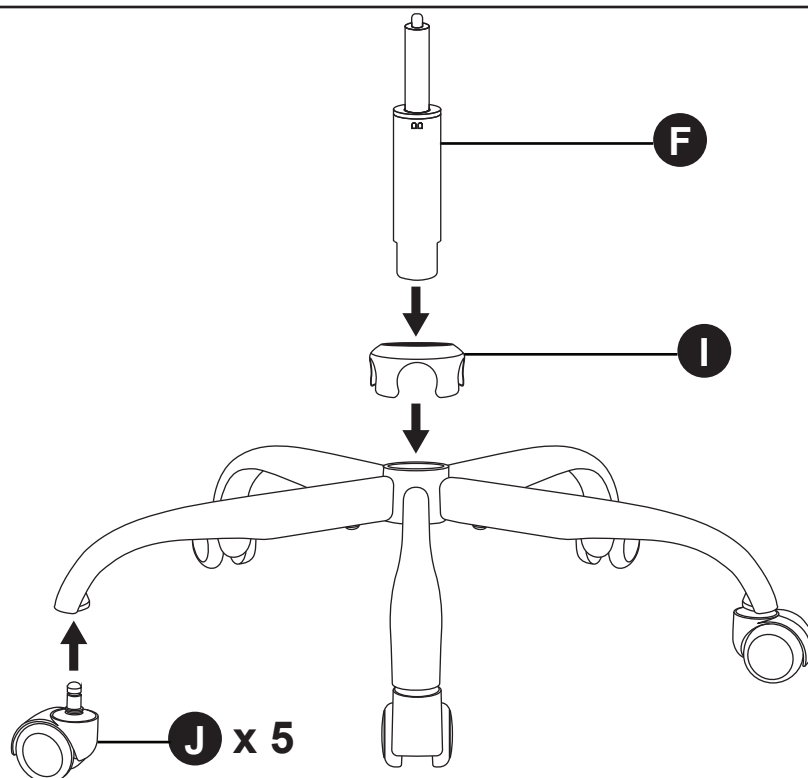

STEP 2: Install casters and gas lift cylinder. Push casters into the reserved holes at the end of each chair foot. Then place the gas lift cylinder onto five-star-shaped base.



STEP 3

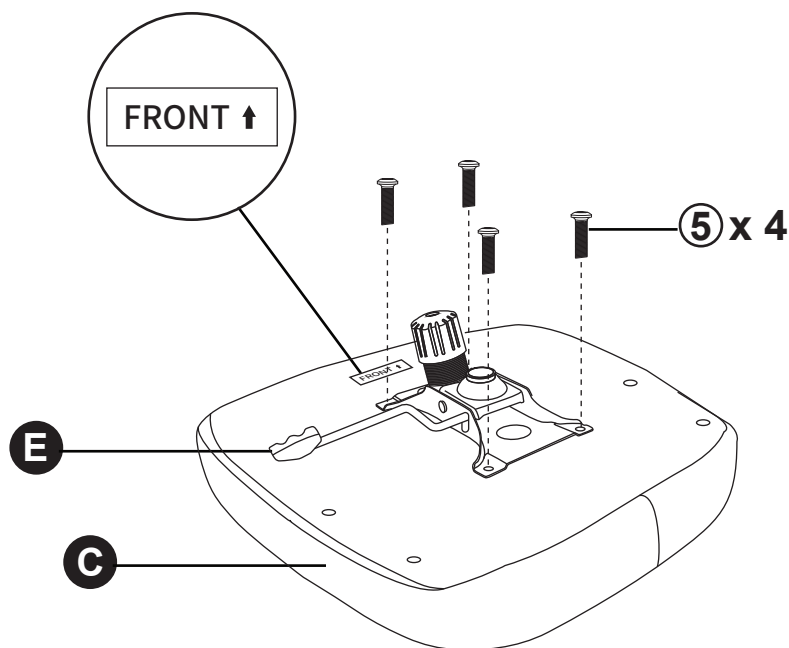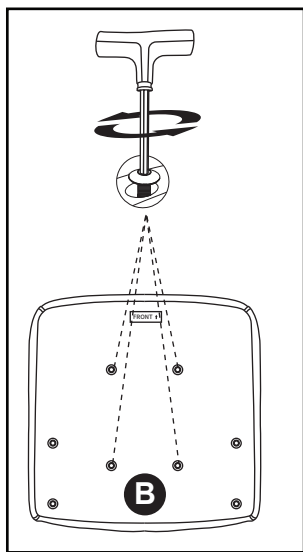

STEP 3: Fix the chassis to the seat bottom with screws. Please double check the direction of the chair cushion when installing to avoid reverse installation.

NOTE: The screws ⑤ for this step were preinstalled in the seat to prevent missing in transit. Please take it off before installation.


STEP 4

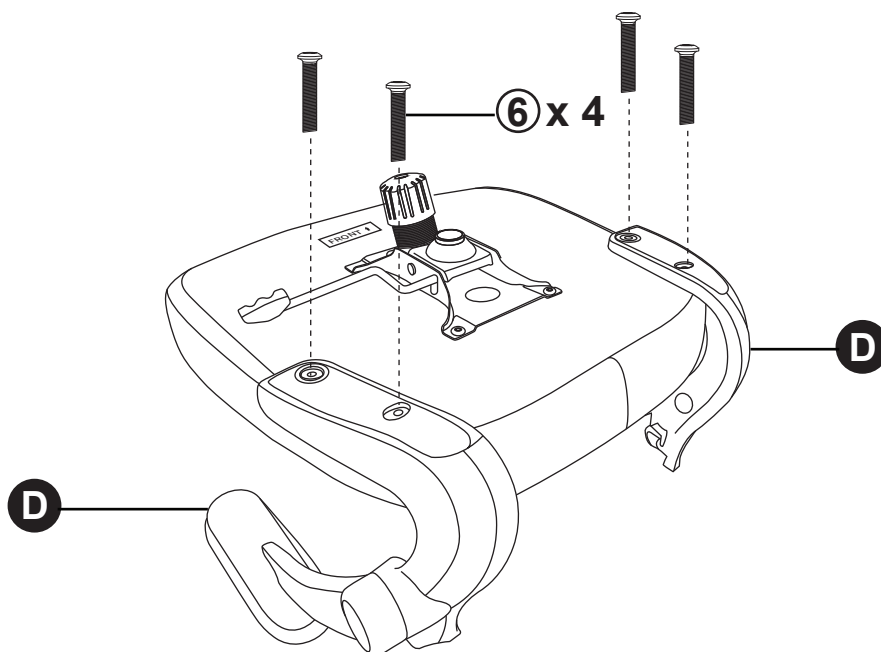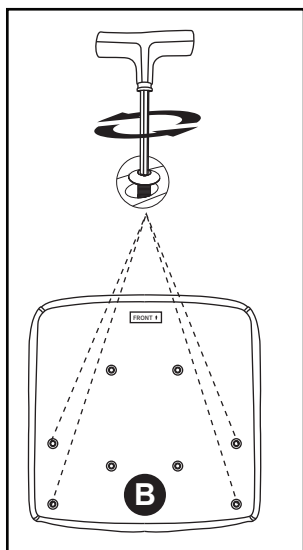

STEP 4: Install armrests to the seat bottom with screws.


NOTE: The screws ⑥ for armrests were preinstalled in the seat to prevent missing in transit. Please take it off before installation.

STEP 5

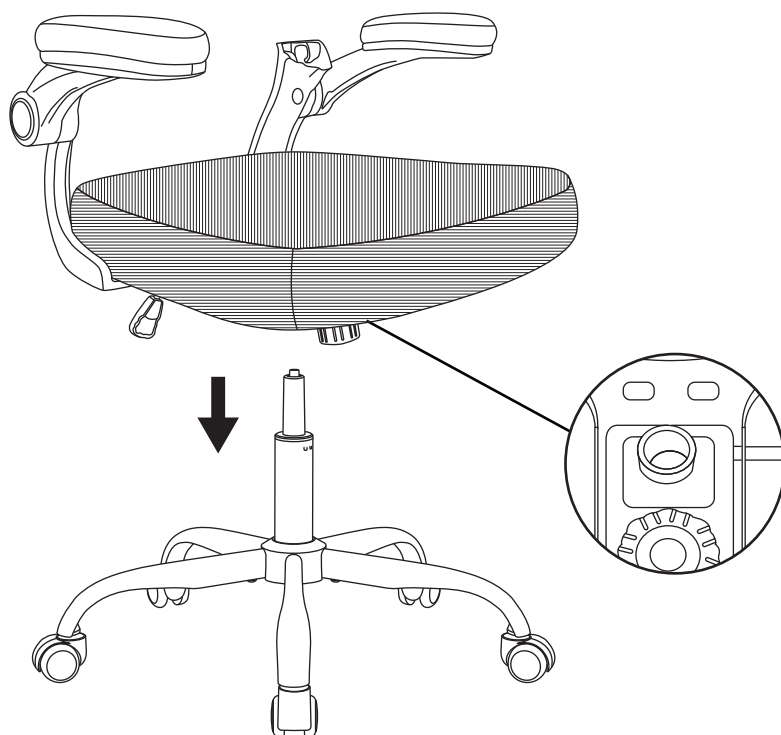


STEP 5: Place the chair cushion onto the gas lift cylinder, press and spin the cushion to confirm its stability.

STEP 6

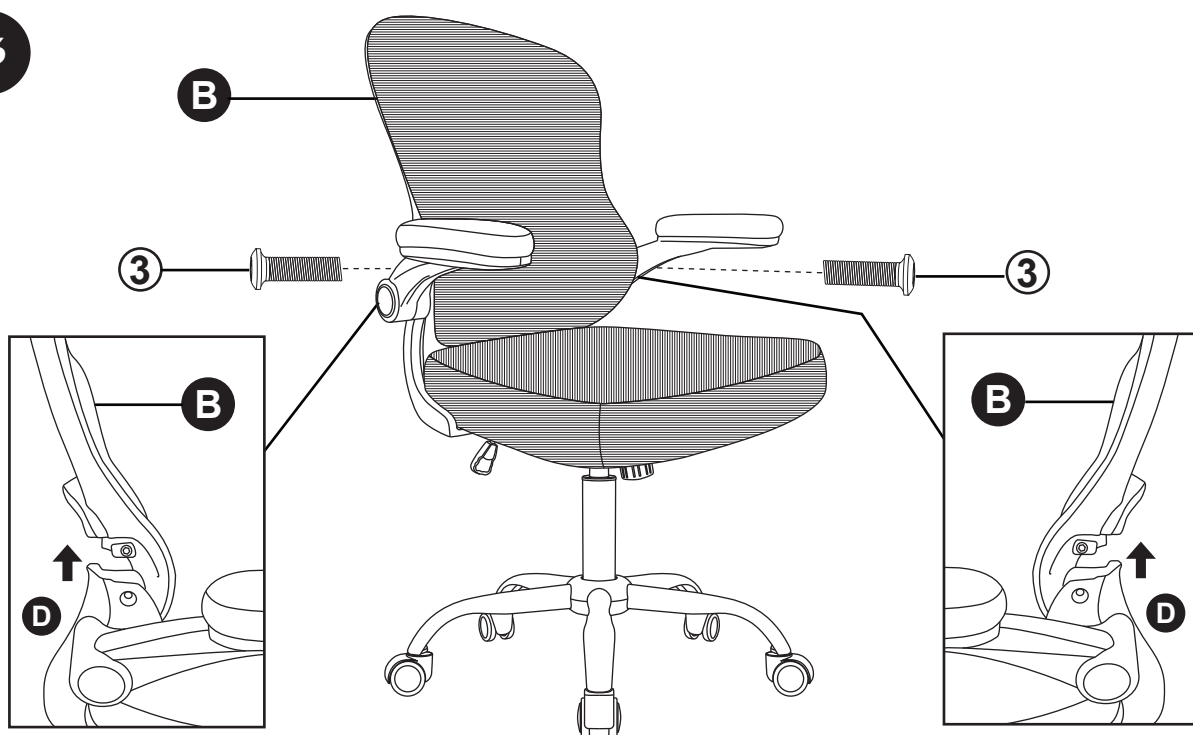


STEP 6: Install backrest with screws.

STEP 7

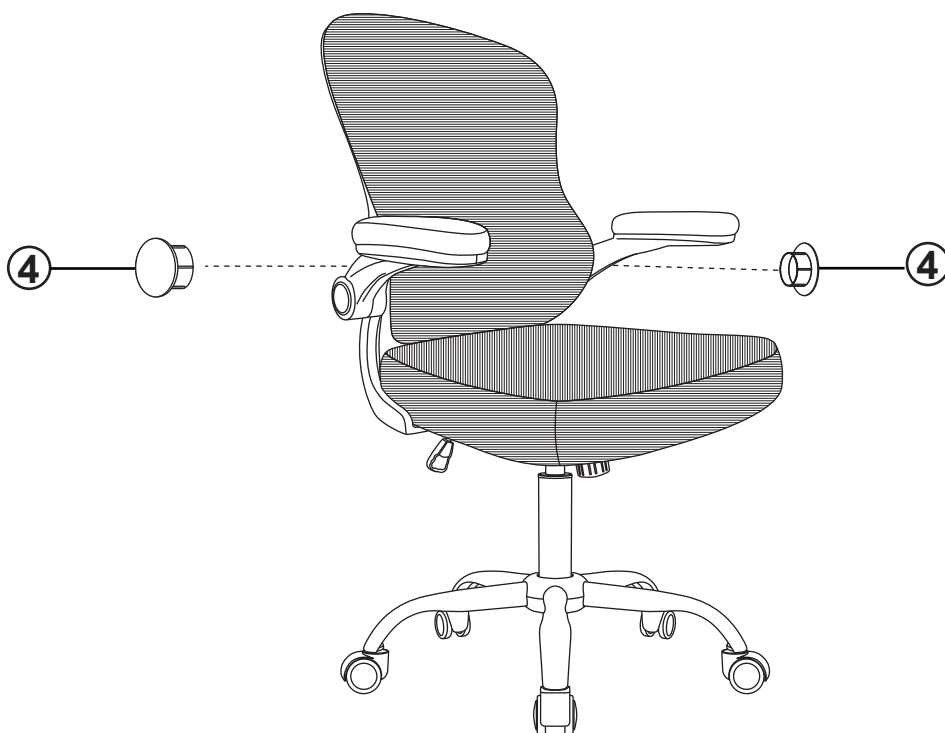

STEP 7: Cover the crew holes on both sides with caps

STEP 8

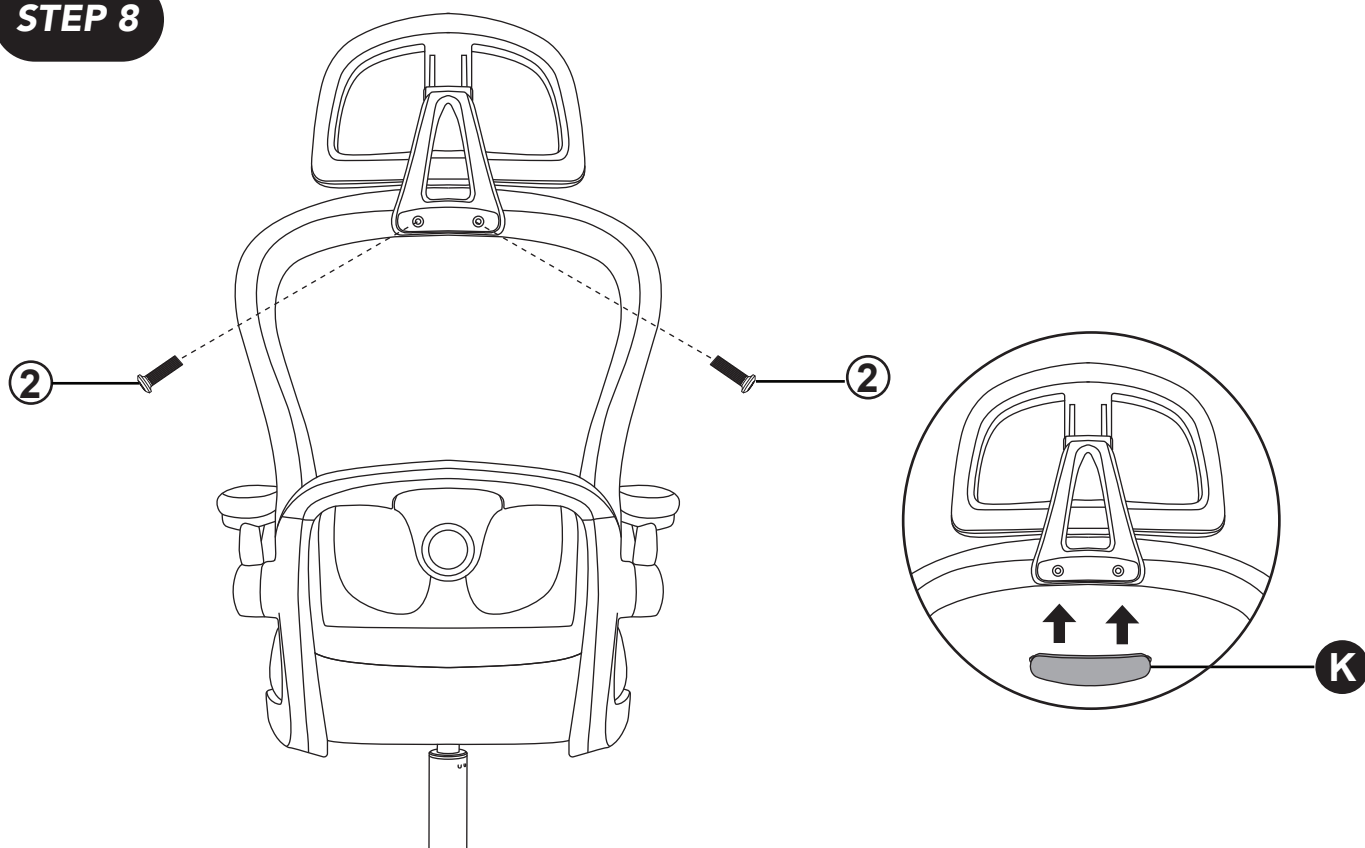

STEP 8: Install headrest with screws. Then install the glitter.




FINISH



At last, do not forget to double check the overall installation. Shake the chair back and forth with your hands to see if the chair is firmly assembled.

Tilt, Lock & Height Adjustment




You can adjust the chair height according to your needs by pressing the handle vertically.

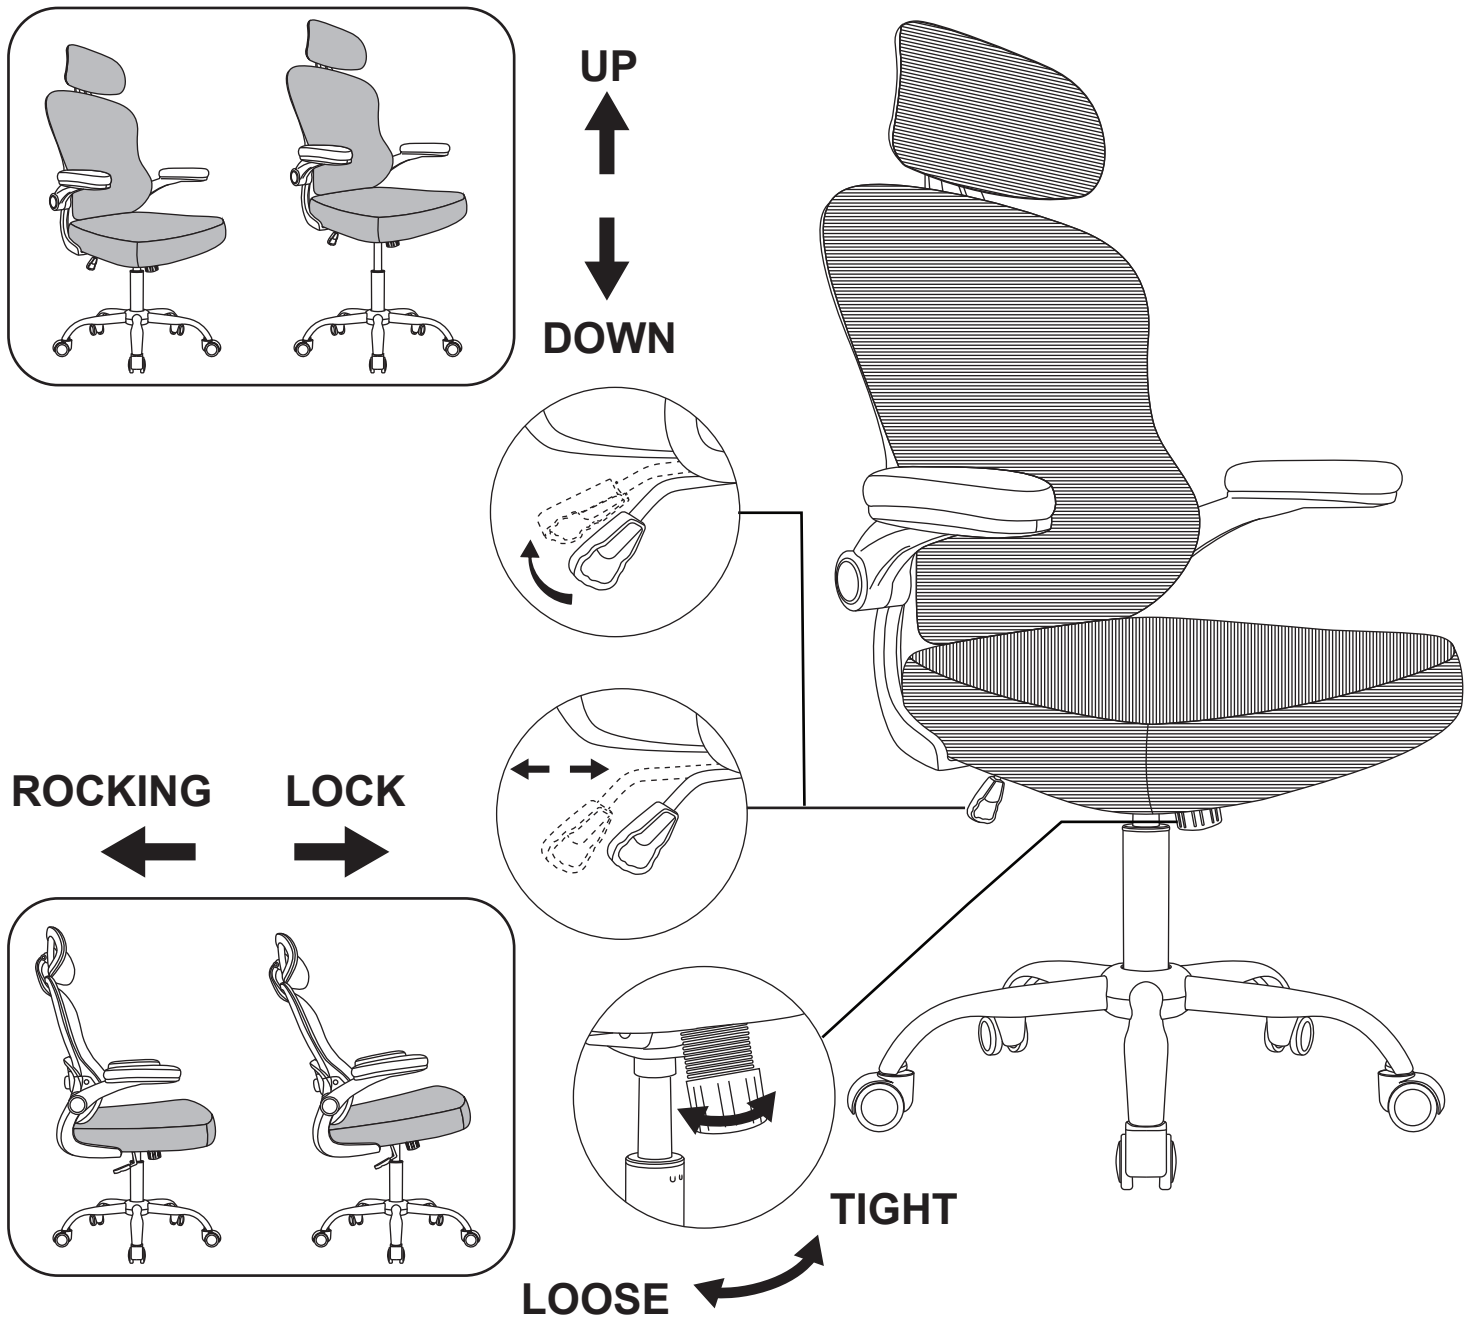

Pull the lever out to turn on the tilt function to lean back. Pull the lever inside to lock the tilt. Turn the knob under the seat to adjust the tilt tension.





Headrest,Lumbar Support&Armrest Adjustment

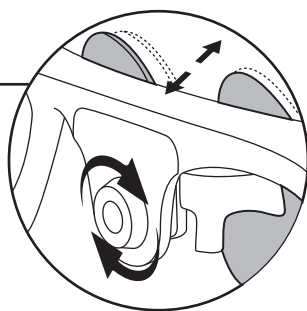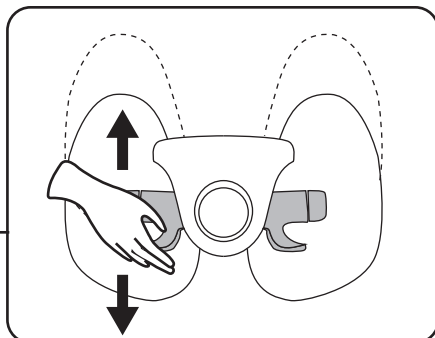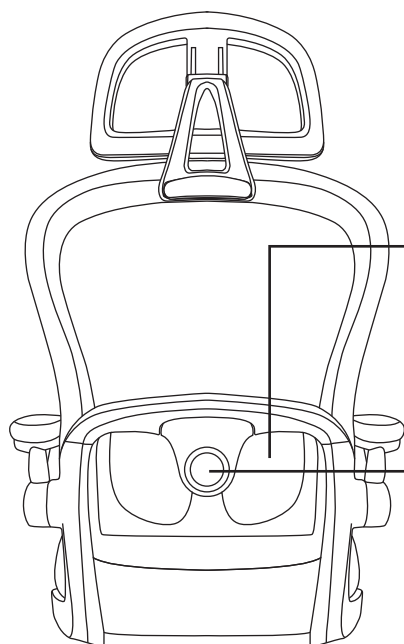


The lumbar support can be adjusted up and down, as well as front and back depth adjustment by adjusting the knob.

(Please note that it is best to adjust the lumbar support up and down when it is at the outermost depth of the front and back to ensure smooth adjustment)

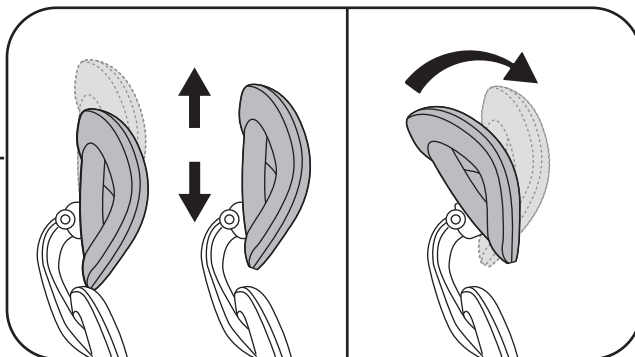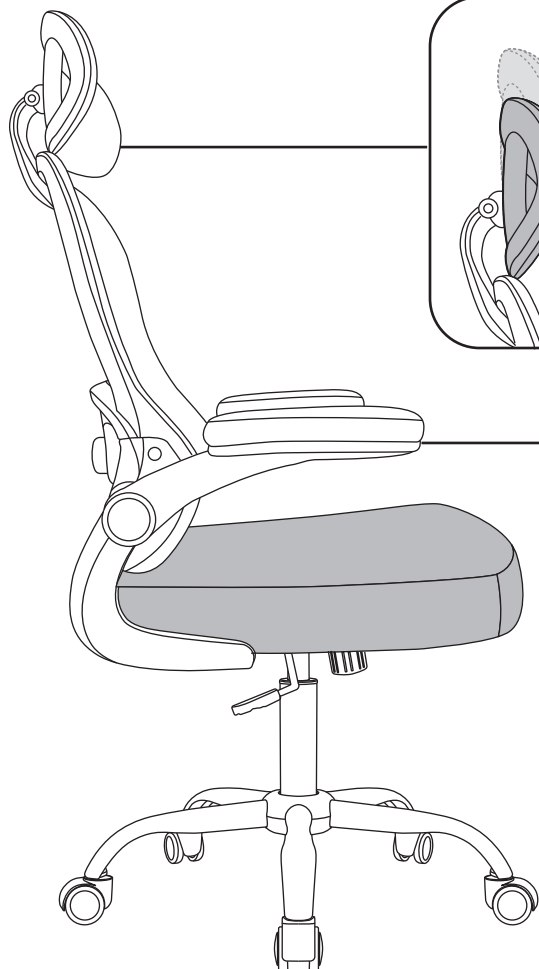

The headrest can be adjusted up and down, rotate upwards.

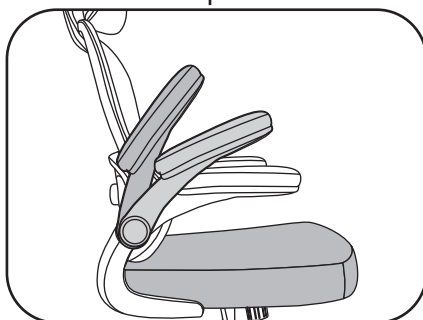

The armrests can be flipped up

WARRANTY

- We offer a 1-year basic warranty on the ENTIRE OFFICE CHAIR from the date of purchase against defects in material and workmanship.
- This warranty does not apply to improper installation or handle and damage by human caused error, nor to any unit that has been repaired or altered by unauthorized third party institution or personnel. Under no circumstances will these products be entitled to our warranty.
- This limited 1-year basic warranty will only grant customers certain legal rights; customers may have other rights according to different state laws.
- If you have any questions or need assistance with our product, please contact us. Our professional team will be there to assist.