Assembly Instructions



Assembly Instructions

ASSEMBLY REQUIREMENT

ONE PERSON ASSEMBLY: 20 MINUTES (APPROXIMATE) TOOLS REQUIRED: ALLEN WRENCHES (PROVIDED)

ASSEMBLY REQUIREMENT

- 1. Remove all packaging materials, staples and packing straps from the carton.
- 2. Confirm with Parts Checklist before assembling.

Attention

- **1.** Leave sufficient room for assembly.
- **2.** Assemble the product on a surface that does not scratch or damage the exterior and finish of the furniture.
- 3. Do not over-tighten any fittings as it may cause damage.
- 4. DO NOT USE POWER TOOLS TO ASSEMBLE THIS PRODUCT.
- **5.** Do not sit or stand on it before the assembly is complete.

CARE AND USE

- 1. Recommended for indoor and residential use only.
- 2. Wipe with a soft, dry cloth. Keep away from abrasives and household cleaners.
- **3.** Check all the fittings periodically and re-tighten if necessary. Do not use the product if any part is damaged or broken.

Office Chair Limited Warranty

Office Chair is warranted from the date of purchase against failure due to material and workmanship as follows

- 2 YEARS on all unmovable metal parts;
- 1 YEAR on upholstered PU leather and foam;
- 1 YEAR on component parts including control mechanisms, gas cylinder, wood, plastic parts, base and casters.


To make a warranty claim, please contact us with model number, purchase proof and problem descriptions.


Problem verified, we will:


- a) Send a replacement.
- b) Send a new product if necessary, customer need to return the original one to our warehouse. Return freight will be paid by us

RETURN POLICY

30-day return policy after receiving is provided. We offer free return freight.

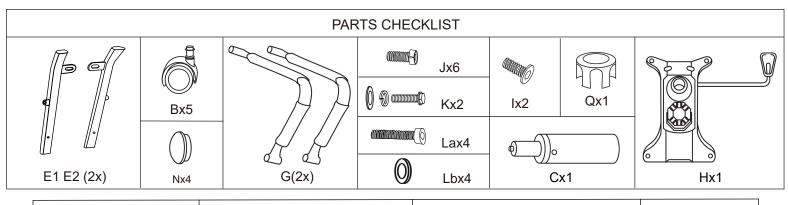



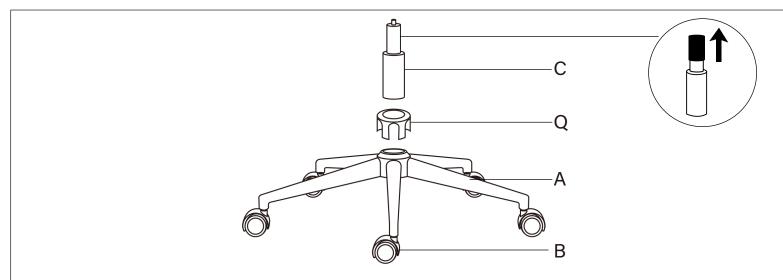



Step 1: Insert the casters **B** into the five star base with force.

Press the base cover into the middle of the five star base.

Insert the gas lift **C** into the center of the base.


Remove the small black gas lift cover before taking the next step.

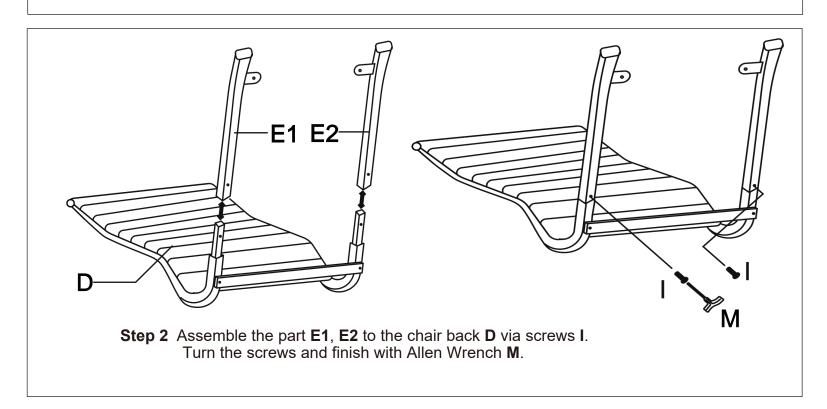

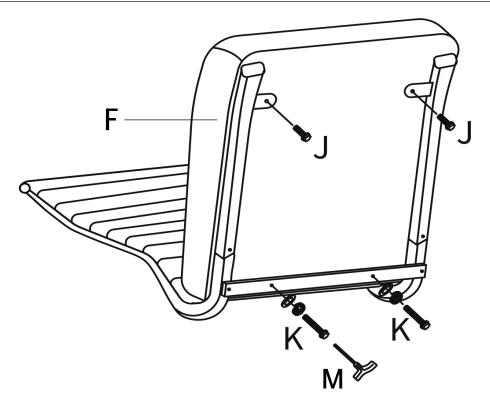


Step 3: Assemble the chair seat **F** with chair back via Screws **J** and **K**. Turn the screws and finish with Allen Wrench **M**.

Notice: Don't tighten the screws completely.

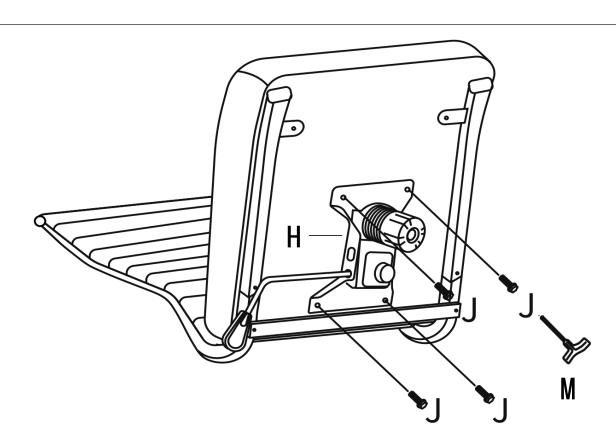

Step 4 Assemble the tilt mechanism ${\bf H}$ with the seat via screws ${\bf J}$. Turn the screws and finish with Allen Wrench ${\bf M}$.

Please note the orientation of the front of the seat and the mechanism.

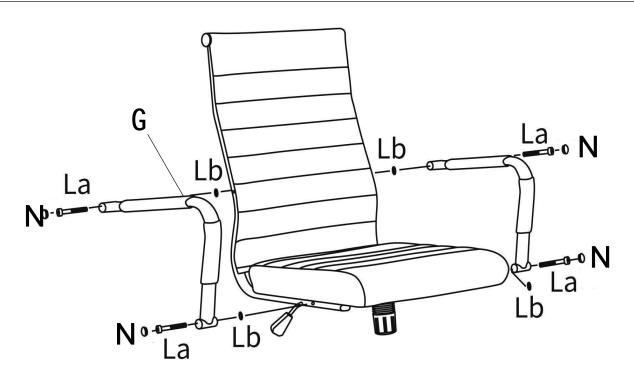

Step 5 Assemble armrests G with the seat and back via Screws L. Turn the screws and finish with Allen Wrench M. Fill the holes with cap cover N.

Notice: Tighten all the screws completely.



Step 6:Attach the assembled seat to the assembled base by aligning the hole in the tilt mechanism to the top of the gas lift.

Press the seat firmly to complete the installation.



Step 7: Enjoy Your New Chair!