

ASSEMBLY GUIDE

1.MULTI-BOX SHIPPING NOTICE & INSPECTION PROTOCOL

Your sofa ships in 2 separate boxes. Deliveries might arrive on different dates—please wait to unpack or start assembly until both boxes are received.

2.DELIVERY VERIFICATION

Please confirm you've received both boxes, then give them a quick check for any damage or defects. Use the part list in the manual to verify all contents.

3.DISCREPANCY REPORTING

Contact the seller directly via your order and report the issue, providing pictures of any missing or damaged parts. Our customer service team is standing by.

4.FRIENDLY REMINDER

Keep vacuum-sealed cushions unopened until the sofa frame is fully assembled. Due to vacuum packing, cushions may have wrinkles. To help them return to their original shape, you can give each cushion several firm pats. This treatment will eliminate most wrinkles within 72 hours



Return & Warranty Policy

- 1.We are dedicated to delivering high-quality products and exceptional service to ensure your satisfaction. If you need replacements or assistance, please don't hesitate to reach out to us.
- 2.If your item arrives damaged or defective, kindly take multiple photos as evidence to support replacement or refund requests.

Parts List

A  Seat Frame	B  Seat Cushion	C  Back Cushion 2PCS
D  Seat Cushion Case	E  Back Cushion Case	F  Back Cushion Case
G  M6*50MM Screws 8PCS	H  Washer 8PCS	I  Allen Wrench
J  Legs 4PCS		


Step 1

Locate the accessories at the bottom of the Corner by following the indicator arrow



Step 2

Secure the wooden feet (J) to the corner seat frame (A) using 8 sets of screws (G) and washers (H) with the wrench (I).

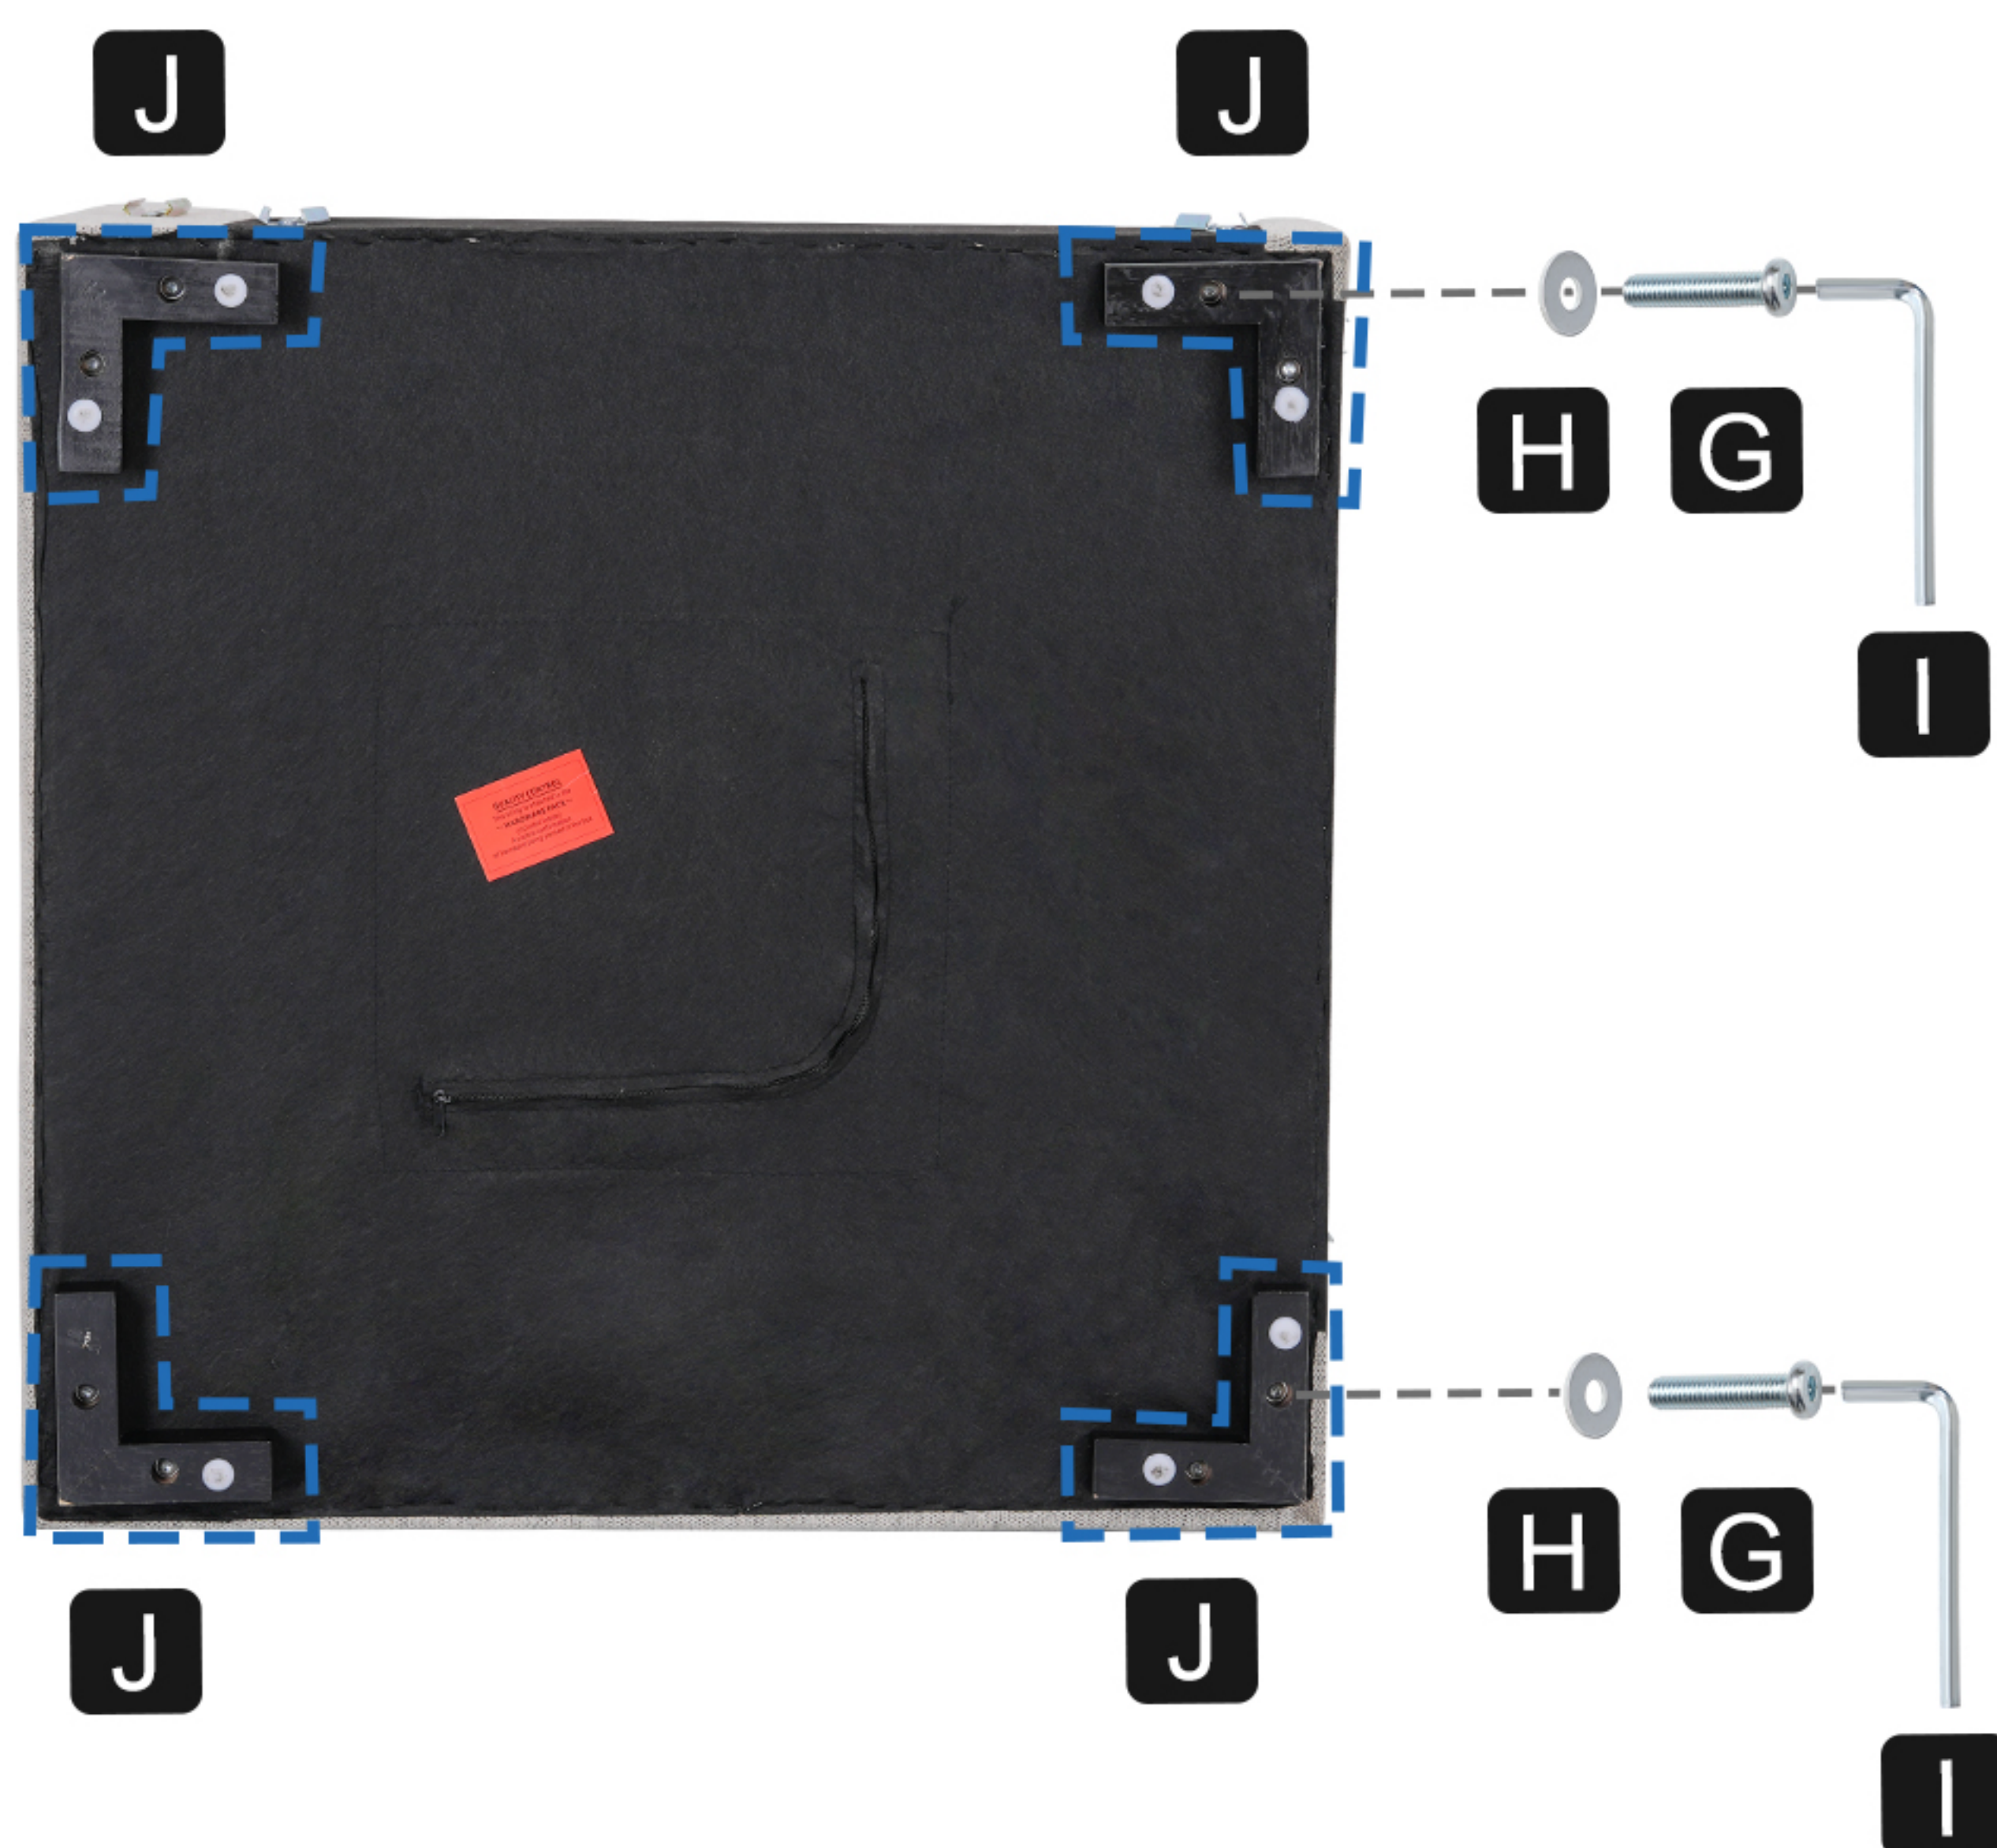

Step 3

Gently slice open the vacuum-sealed bag. Insert the cushion inner into the cover, then give each cushion several firm slaps to help plump it up. Allow up to 72 hours for most wrinkles to smooth out.




Step 4

Fluff the Seat Cushion, and then we can start to connect the Corner to the Sofa or Chair.



Step 5

Slide the seat frame with an armrest on one side of the Sofa into the Corner.

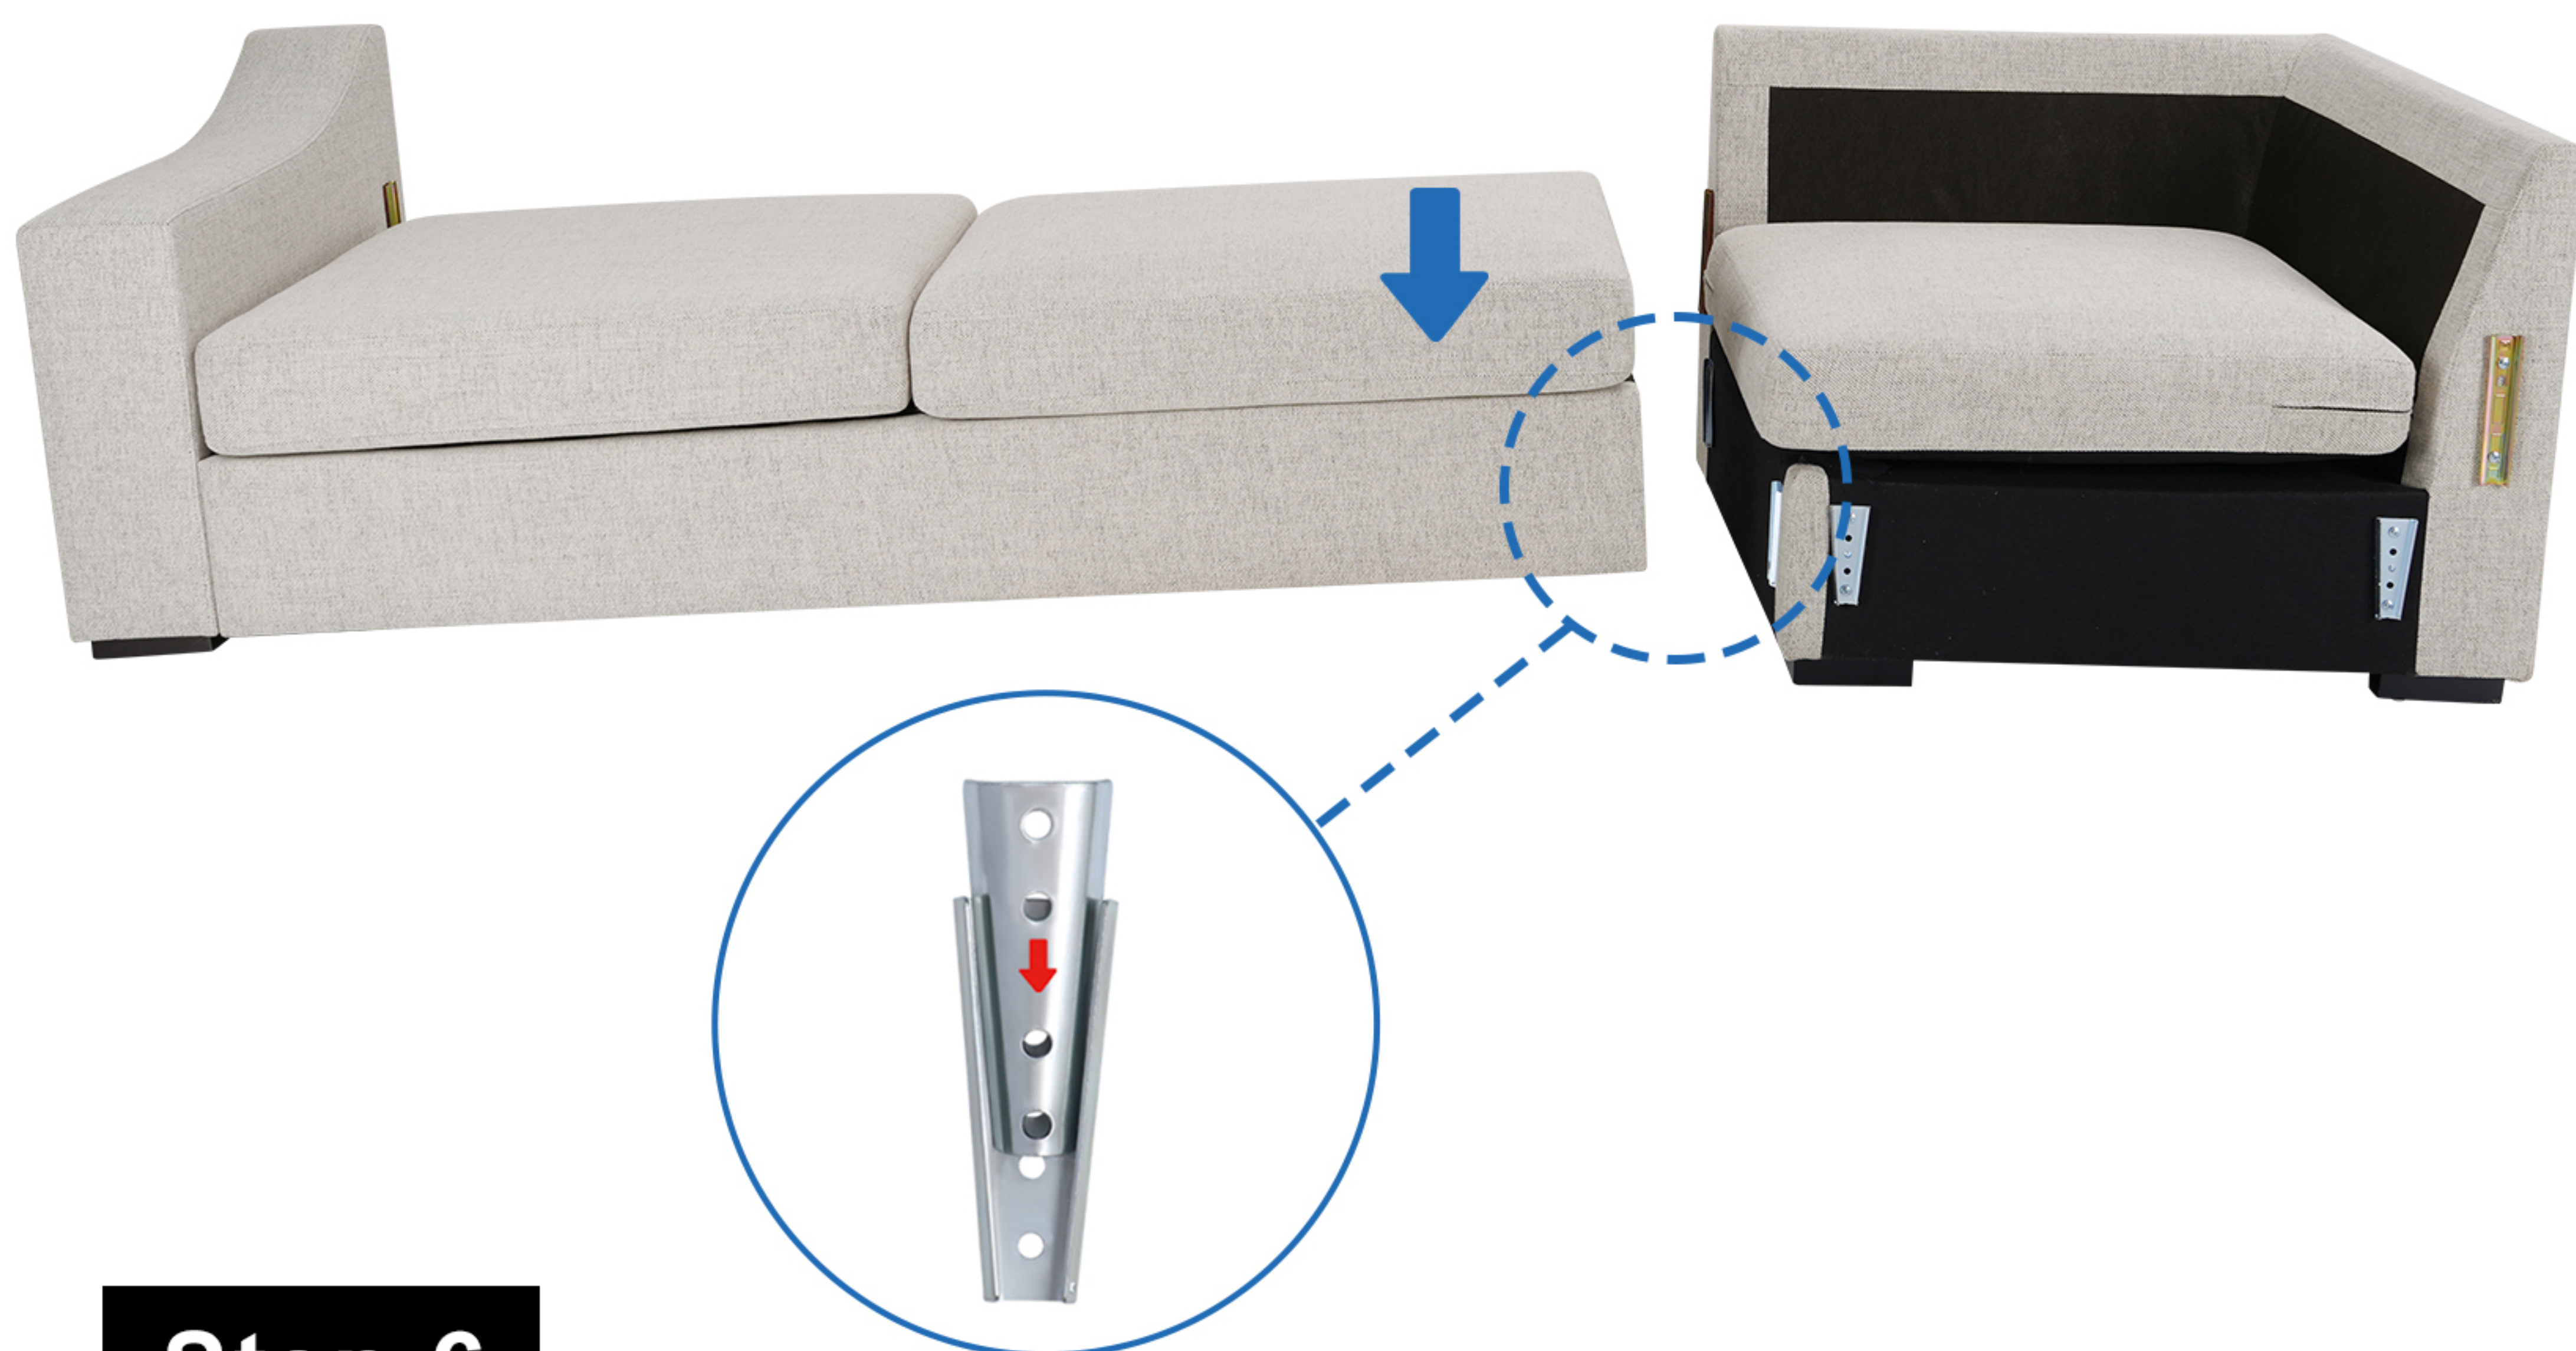

Step 6

Slide the seat frame with an armrest on one side of the Chair into the Corner.



Step 7

Align the Velcro strips and adjust all the Seat Cushions properly.



Step 8


Slide the Backrest Frames of the Sofa and Chair into the Corner.



If the gap is too large for the bolt to slide in, push the product arm-rest against the wall and apply inward pressure before placing the backrest.

Step 9

Gently slice open the vacuum-sealed bag. Insert the cushion inner into the cover, then give each cushion several firm slaps to help plump it up. Allow up to 72 hours for most wrinkles to smooth out.

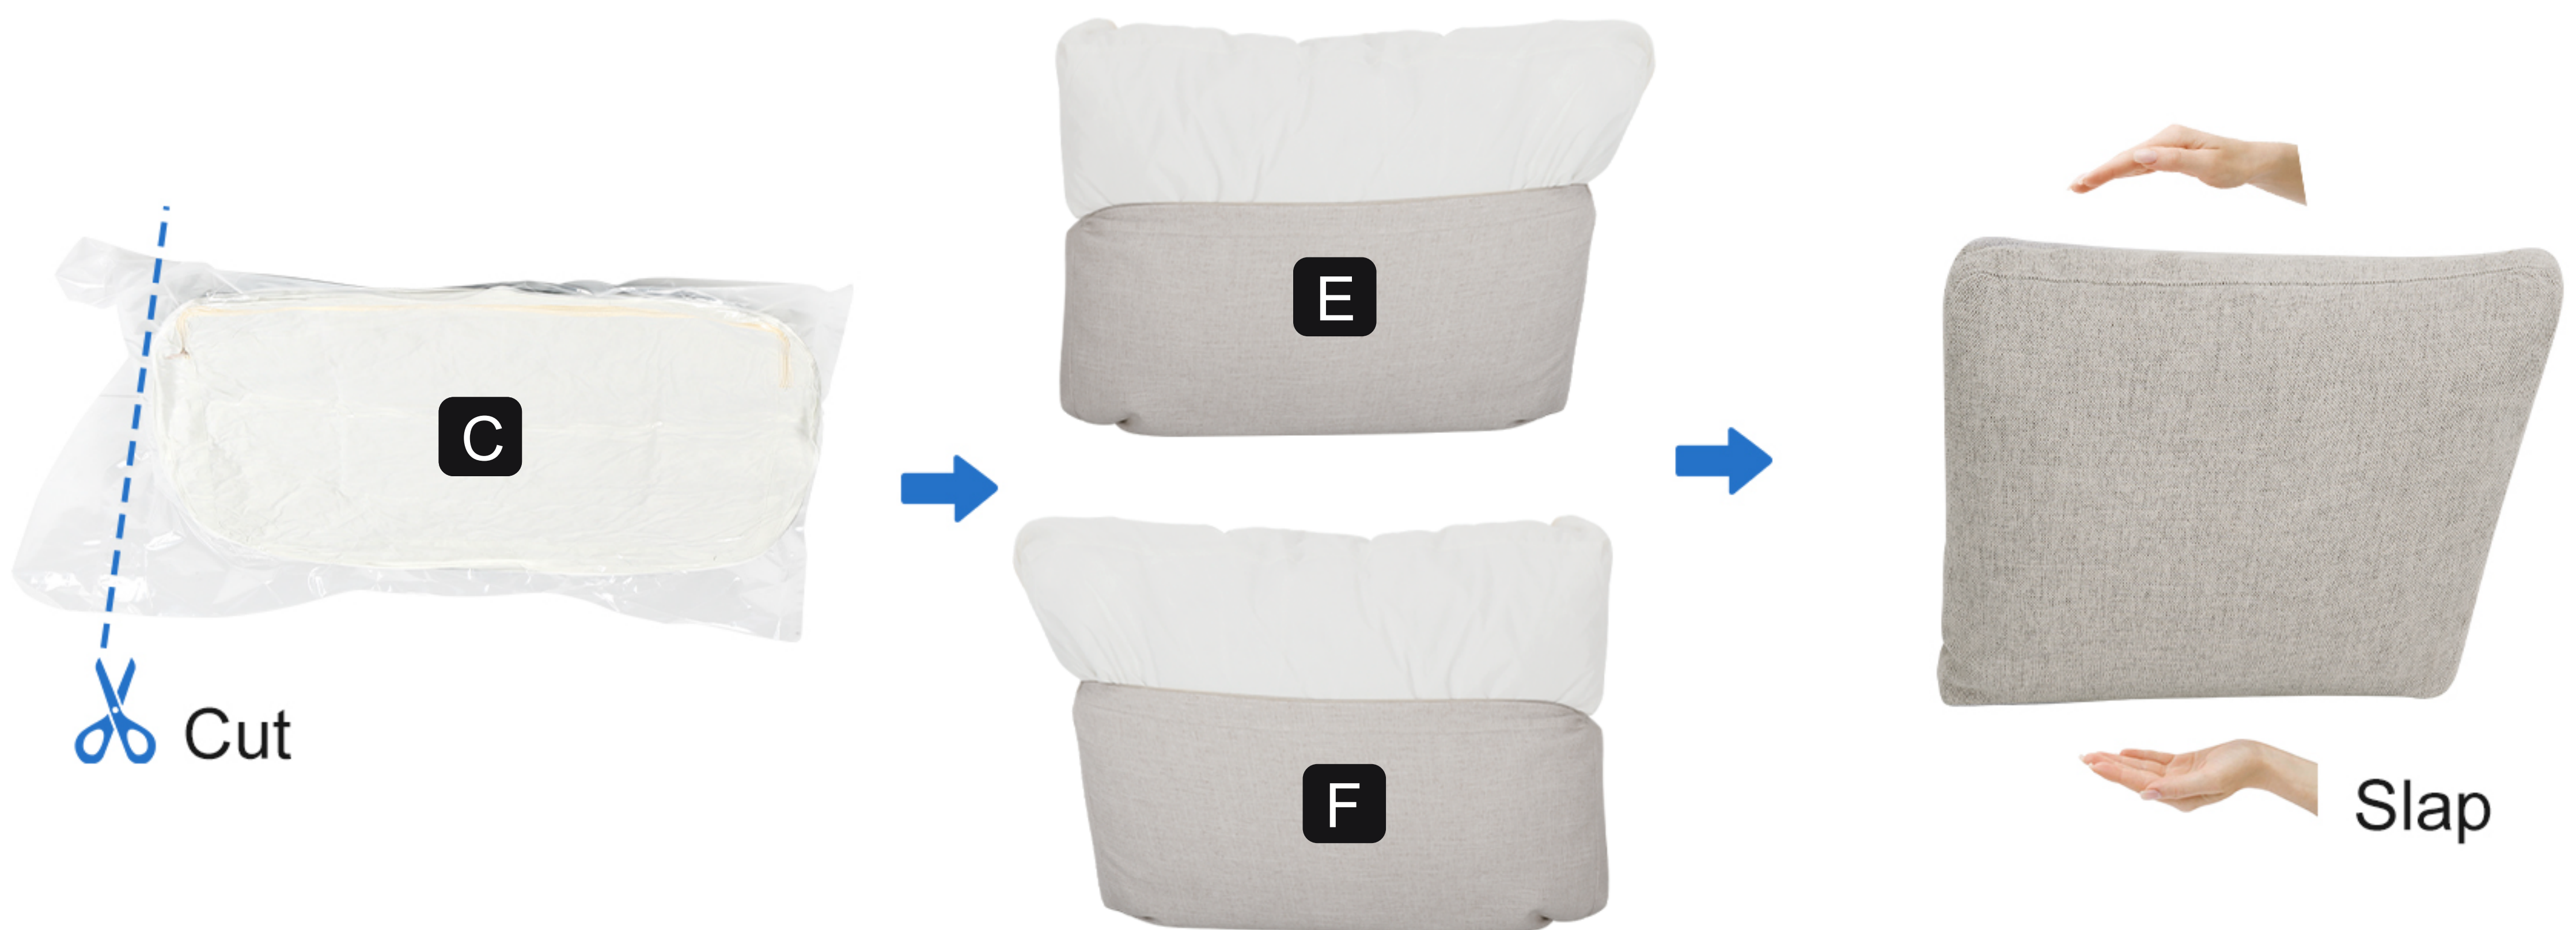

Step 10

Fluff all the back cushions and place them on the sectional to complete its assembly.

