




Must be aligned with the groove




Two diagonal screws are withdrawn, stuck and then tightened

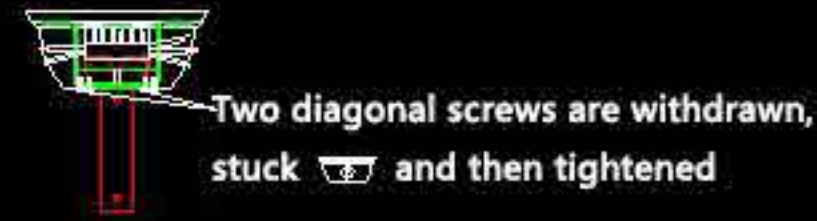

Black drive inside



110V

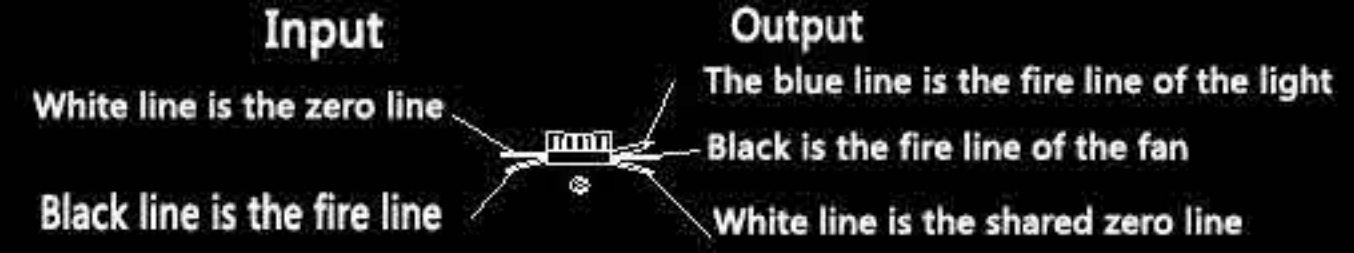

Input

White line is the zero line

Black line is the fire line

Output

The blue line is the fire line of the light


Black is the fire line of the fan

White line is the shared zero line


Separate links of lights and fans

I. Component

- ① Motor
- ② Fixed head
- ③ Screw package
- ④ Head cover
- ⑤ 10cm boom contains components
- ⑥ Hang Pole
- ⑦ Hang Shelf

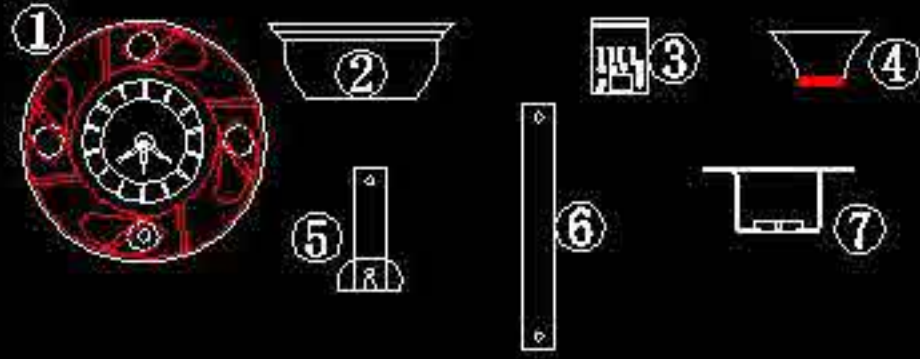

II. Hang Shelf fixing method

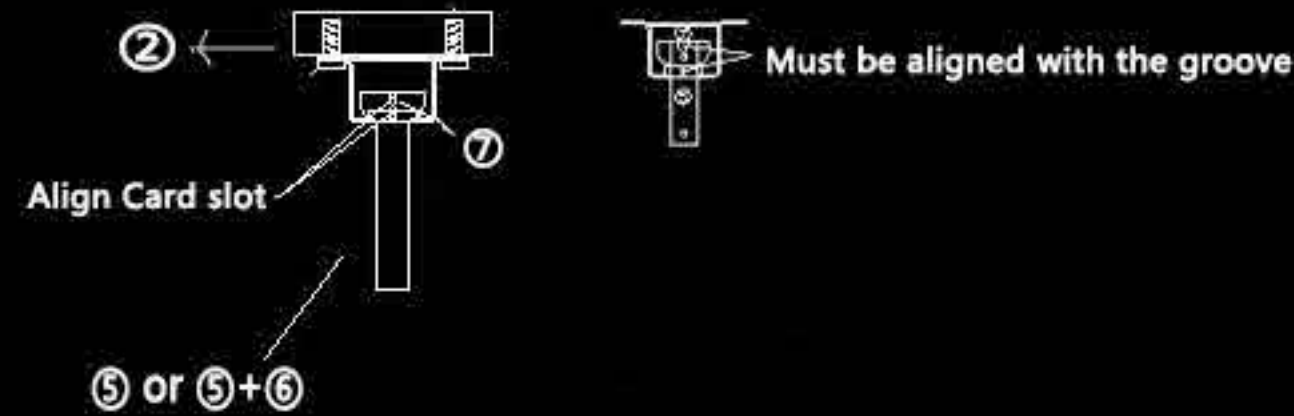

Must be aligned with the groove

Align Card slot

⑤ or ⑤+⑥


If it is a cement ceiling, please punch first, Then use the explosion-proof screw to fix 2.

If it is a wooden or plaster ceiling, install it directly with an automatic attack screw.


For safety, please use the original hanging rack, Load bearing must be above 60KG.

III. Installation of lamps


First unscrew the screw half on the main unit, One of them is screwed out directly, Then align the hole and connect the main unit to the lamp. And tighten each screw.

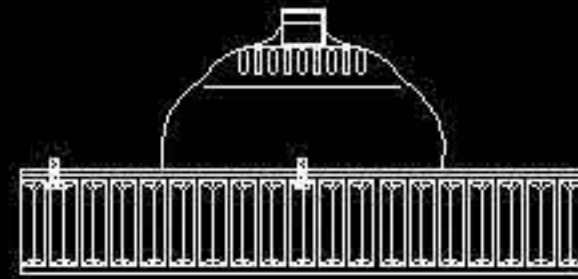

2, Link the fan to the hanger, slowly hang the fan to align the lobe and the slot

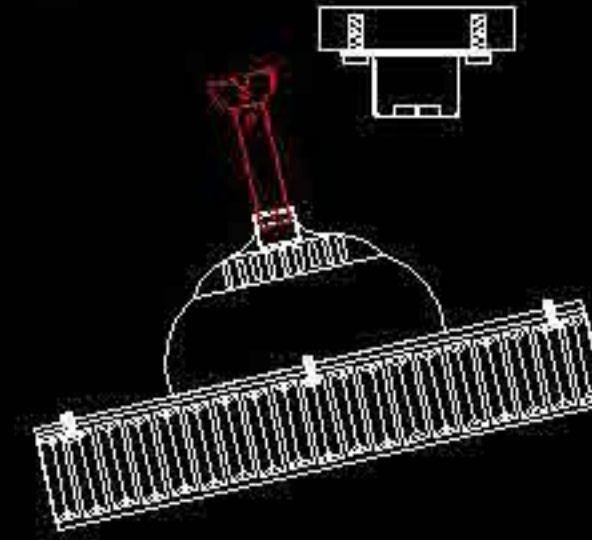


3, After hanging the fan blade, use ②, rotate to the appropriate position and tighten the screws

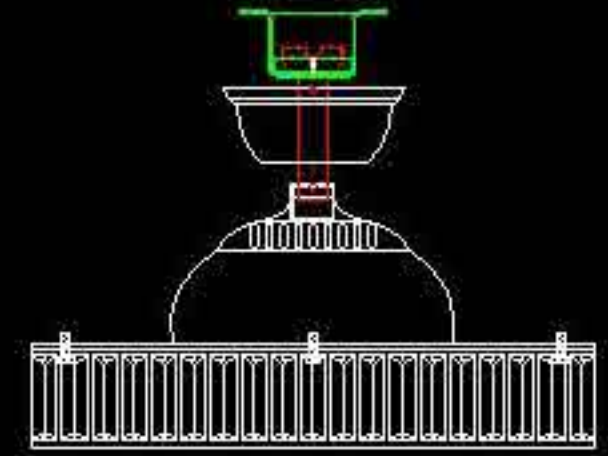

IV. Install host


1, Connect the hang rod to the Connector cover, pass it with the R Plug, and tighten it with screws

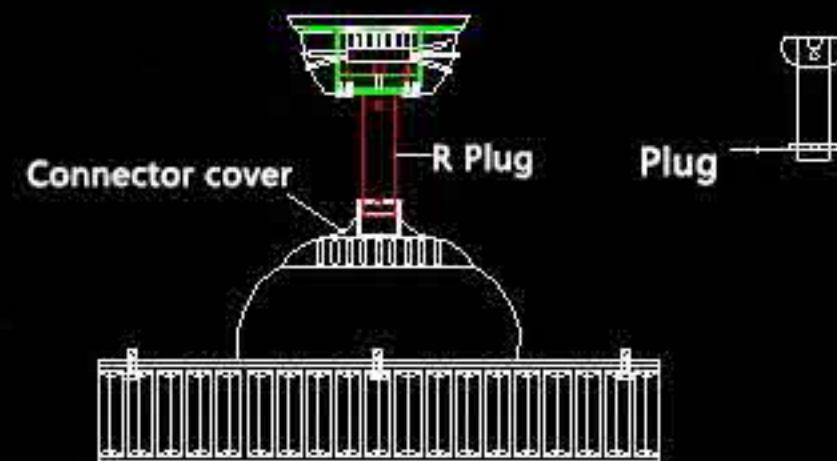

Connector cover

R Plug

Plug

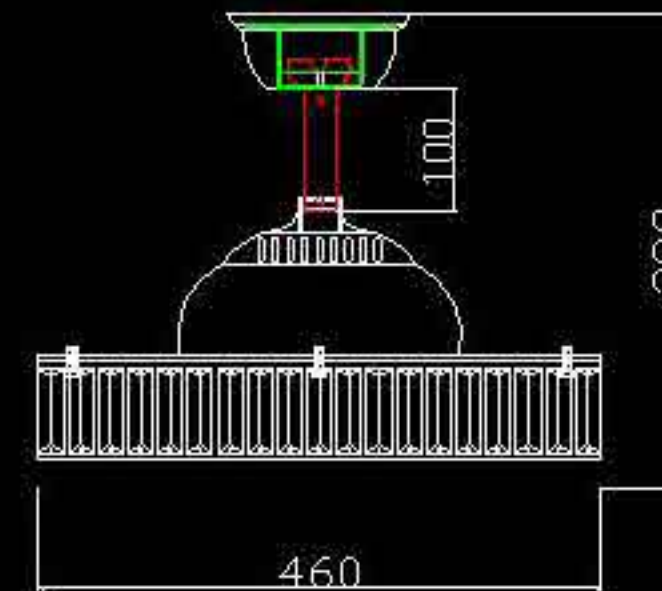

V. Installing the lampshade

Unscrew the 4 screws of the lamp panel and find the hole corresponding to the lampshade.

