



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Reflex® pull down system offers smooth operation, easy movement, self retraction, and secure docking.
- Metal construction with various finishes identified by suffix
- Duralock™ quick connect system
- Pullout spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while the pullout wand provides the maneuverability for cleaning or rinsing

OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE


- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA ♿ for lever handle

WARRANTY


- Limited lifetime warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

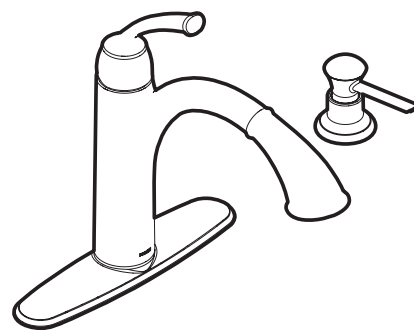

Sullivan™
Single Handle Pullout
Kitchen Faucet

Models: 87047 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1, 2, 3 AND 4 HOLE, 1-1/2" (38mm) MIN. DIA. (1 HOLE FOR SOAP DISPENSER)

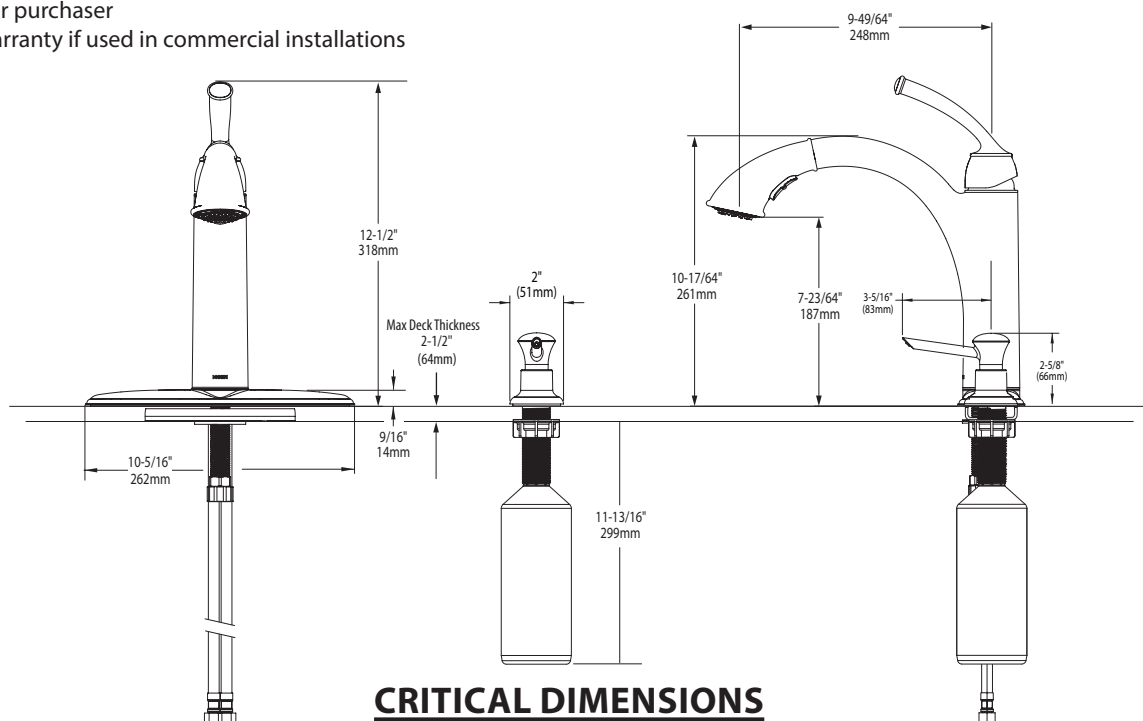

CRITICAL DIMENSIONS

(DO NOT SCALE)