

# Two Piece Slipcover


\*Keep labels on during installation.




To remove wrinkles, tumble dry low with a damp towel.

- 1 LOCATE** the *Center Front of Cover*, *Arm*, *Tuck*, *Tuck Excess Fabric Behind Cushion*, and *Back* labels.


Keep these on during installation.

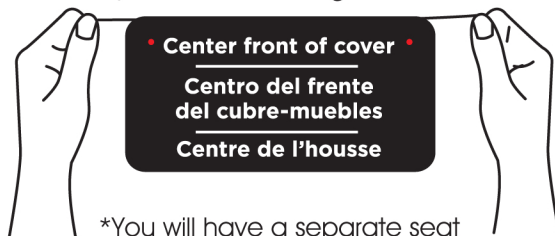


- 2 REMOVE** all cushions. If applicable, place back cushions aside. Slide the seat cushions into the separate seat cover and close it. Put the cushions towards one end of the cover and fold the excess fabric under. Place aside.

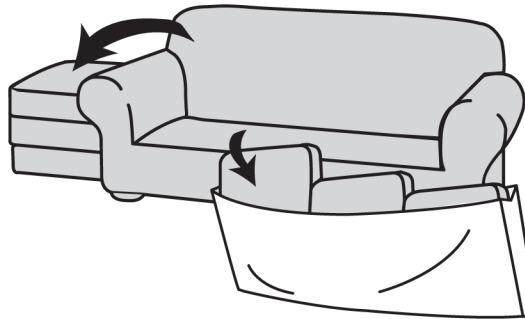


- 3 DRAPE** slipcover over the arms of the furniture, making sure the hem touches the floor evenly on the front.

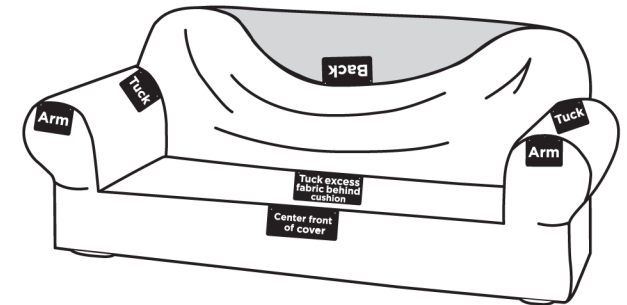


- 4 SMOOTH** out the platform where the seat will be placed. Tuck the fabric into the bottom of the arms at the platform.

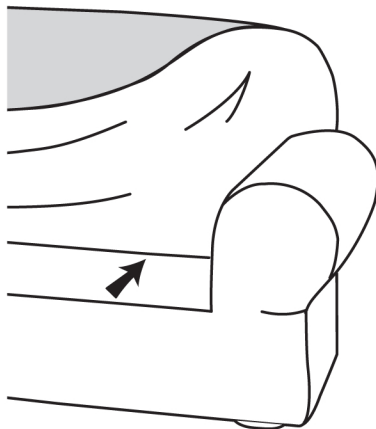

- 5 PLACE** seat cover back into position, making sure the closure faces the back. Slide the back cushions under the slipcover. Pull the draped fabric over the back of the furniture, making sure the back hem touches evenly to the floor.

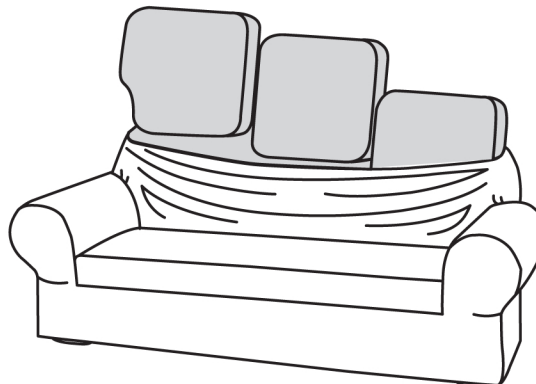

- 6 TUCK & SMOOTH** excess fabric into corners.

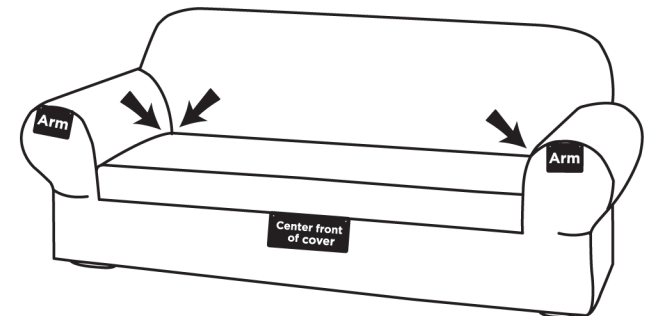

\*When installation is complete, use scissors to remove tags.