



Collection:Frey

Installation manual for:


LD5030D42BK L42.8" *W10.5" *H15.6" L3

Installation instructions:

- 1.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2.White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3."E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4.Secure mounting bracket to the junction box.
- 5.Insert screws(P2) in side of top unit the mounting bracket.
- 6.Install the top plate (05) on the hanging plate (01) with the (04) screw
7. Install the glass cover (11) onto the terminal block (08) and lock it with the screw (09)
- 8.Install the bulbs(not included) into the lamp fixture.

PARTS LIST

The end!

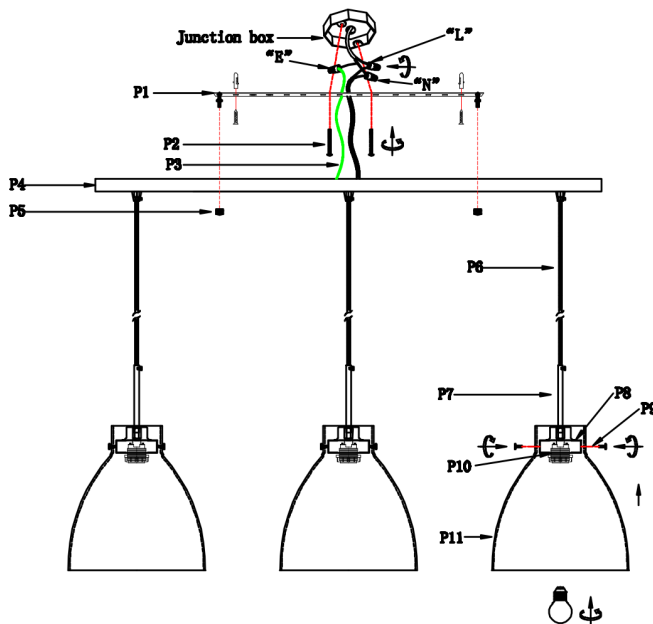

"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire

part	picture	Description	Qty	Check list
P1		L20.6" Mounting bracket	1	
P2		5/32-32 Screw	2	
P3		ground wire	1	
P4		L38.6" *W5.9" H1 canopy plat	1	
P5		Nut	2	
P6		Power Cord 79" SPV Black	3	
P7		ø0.4" *L1.5" metal tube	3	
P8		D3.1" *H2" Terminal Block	3	
P9		Screw	9	
P10		E26 socket	3	
P11		ø10.5" *H11" Glass	3	
P12				
P13				
P14				
P15				
P16				
P17				
P18				
P19				