


# ADJUSTABLE STEEL GANTRY CRANE - AHS-6-15-12

APPROX WEIGHT: 962.04 lbs.  
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

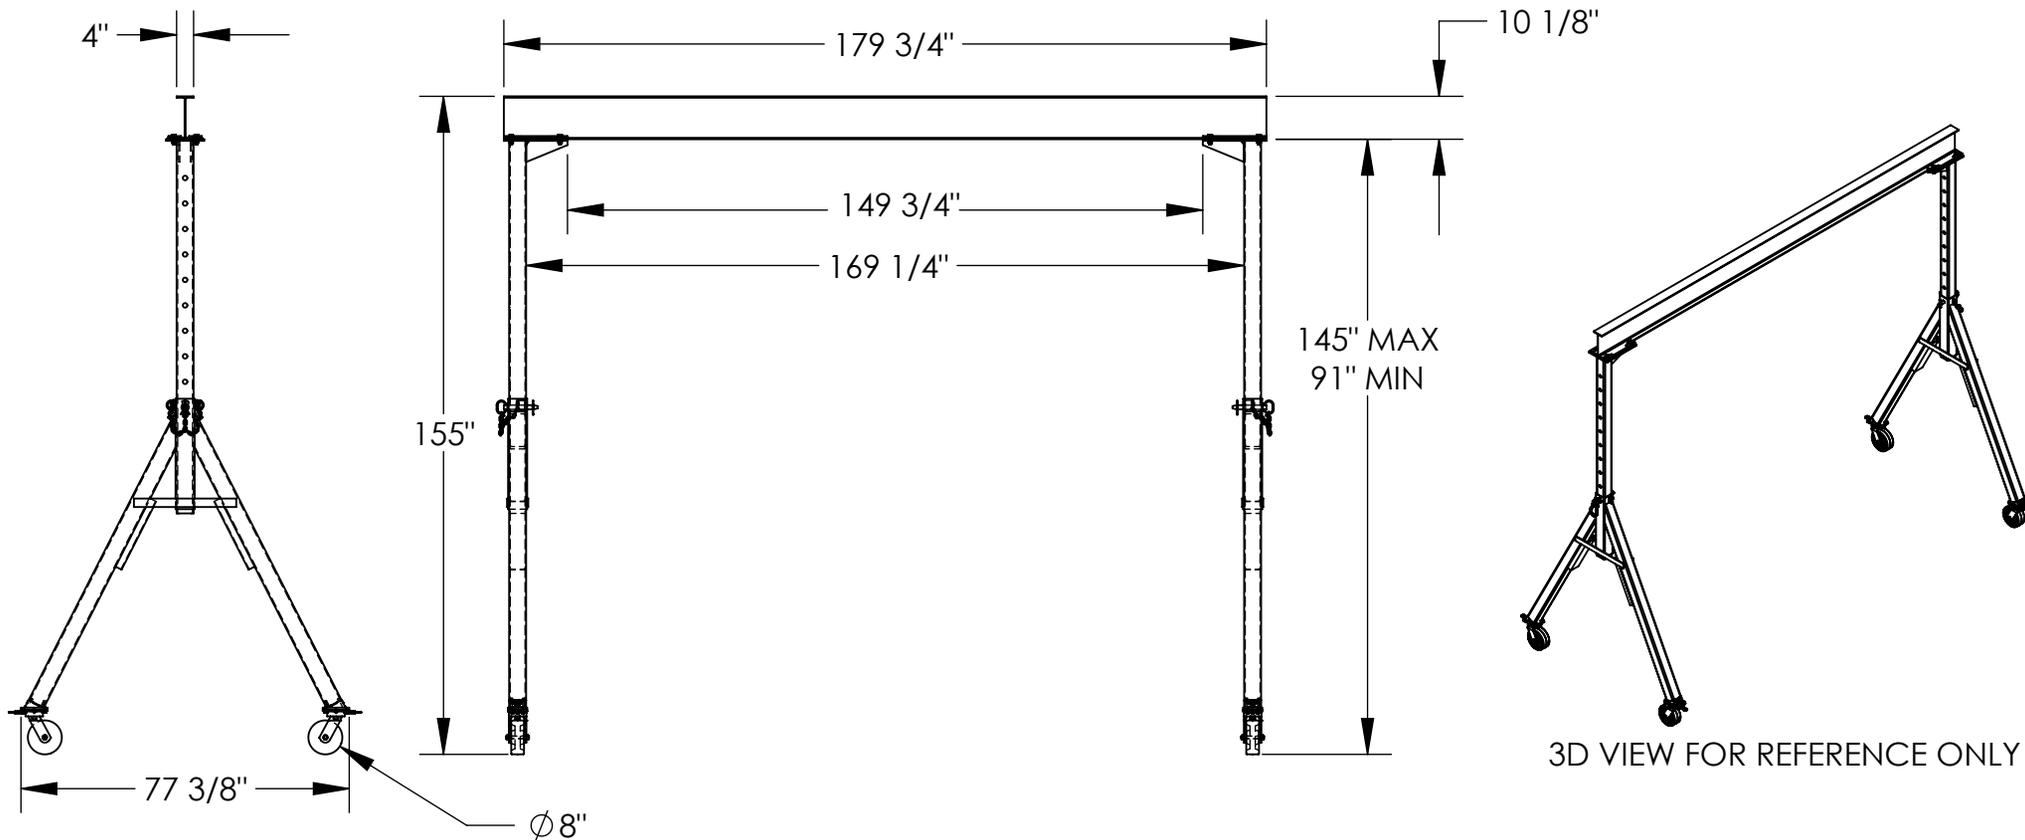

## STANDARD FEATURES

MODEL NUMBER IS AHS-6-15-12  
CAPACITY IS 6,000 LBS.  
BASE WIDTH IS 77 3/8"  
MAX OVERALL HEIGHT IS 155"  
I-BEAM HEIGHT IS 10 1/8"  
I-BEAM FLANGE WIDTH IS 4"  
OVERALL I-BEAM LENGTH IS 179 3/4"  
USABLE I-BEAM LENGTH IS 149 3/4"  
ADJUSTABLE UNDER I-BEAM HEIGHT

145" MAX

91" MIN

HEIGHT IS ADJUSTABLE IN 6" INCREMENTS  
CASTERS: (4) Ø8" X 3" WIDE PHENOLIC  
SWIVEL CASTERS WITH FOUR  
LOCKING POSITIONS

## SPECIAL FEATURES

NONE

### DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

**ANY MODIFIED UNITS ARE NON-RETURNABLE**

[ ] As drawn [ ] As marked

Signed: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name: \_\_\_\_\_

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

APPROVAL

| FOR INTERNAL USE ONLY<br>PROJECT SIGN OFF |  |
|---|--|
| SALES                                     |  |
| ENG.                                      |  |
| FAB.                                      |  |
| POWER                                     |  |

|                      |                |            |
|----------------------|----------------|------------|
| DISTRIBUTOR'S NAME:  |                | P.O.#      |
| VESTIL MANUFACTURING |                | X          |
| W.O.#                |                | X          |
| DRAWN BY: ND         | DATE: 10/01/09 | SALES: X   |
| REFERENCE: X         | SCALE: 1:45    | FILE NAME: |
| QUOTED LEAD TIME: X  | QUOTE # X      | 28-007-082 |