
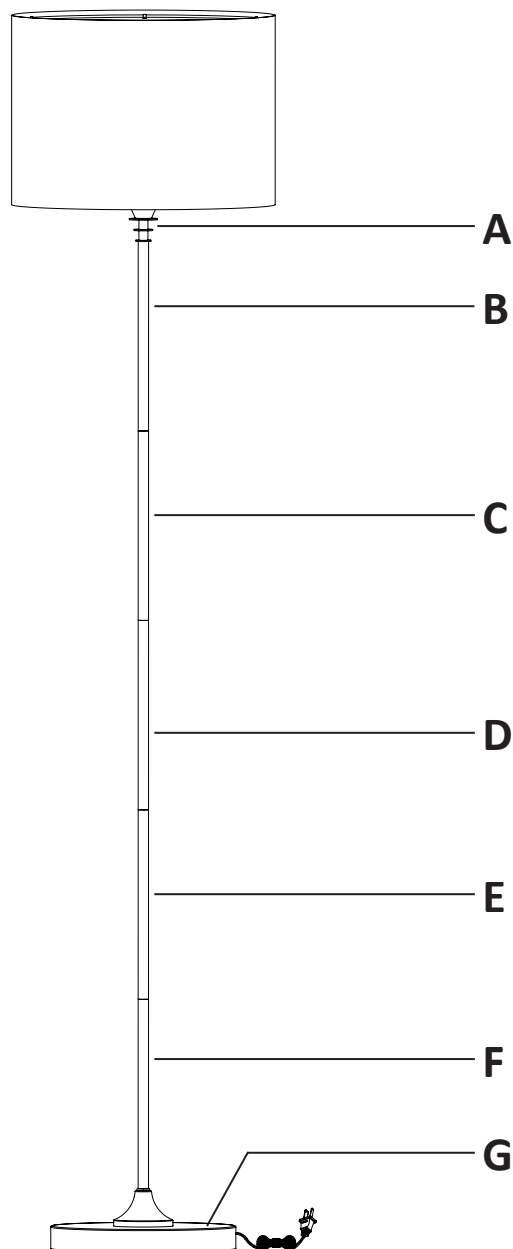





USE AND CARE MANUAL

FLOOR LAMP
Model number: 21658



Hardware (Parts are not to scale)

H1 Shade panel 1 pc		H2 Top ring 1 pc		H3 Bottom ring 1 pc		H4 Socket ring (Pre-assembled to the socket of socket assembly (A)) 1 pc	
--------------------------------------	---	-----------------------------------	---	--------------------------------------	--	---	---

THIS MANUAL CONTAINS IMPORTANT SAFETY INFORMATION. PLEASE READ AND KEEP FOR FUTURE REFERENCE.

IMPORTANT SAFETY INFORMATION

- This lamp is for indoor use only. The lamp should not be used near water. Never immerse the lamp in water or other liquids.
 - Never cover the lamp with any object including cloth or paper as this is a fire hazard.
 - Do not handle the bulb immediately after the light is turned off as it will be hot.
 - This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit into a polarized outlet only one way. If the plug does not fit fully into the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug.
-

PREPARATION

- Before beginning assembly, installation or operation of the product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.
-


ASSEMBLY

SHADE ASSEMBLY

1 Assembling the shade

- Place the shade panel (H1) and top ring (H2) and bottom ring (H3) from the box.
- Attach the top ring (H2) and the bottom ring (H3) to clips on the shade panel (H1) securely into the clips.
- Attach the shade panel (H1) together by velcro.
- Repeat this step for the second shade.

NOTE: Push and pull the shade panel (H1) to be tight before attach it together by velcro.

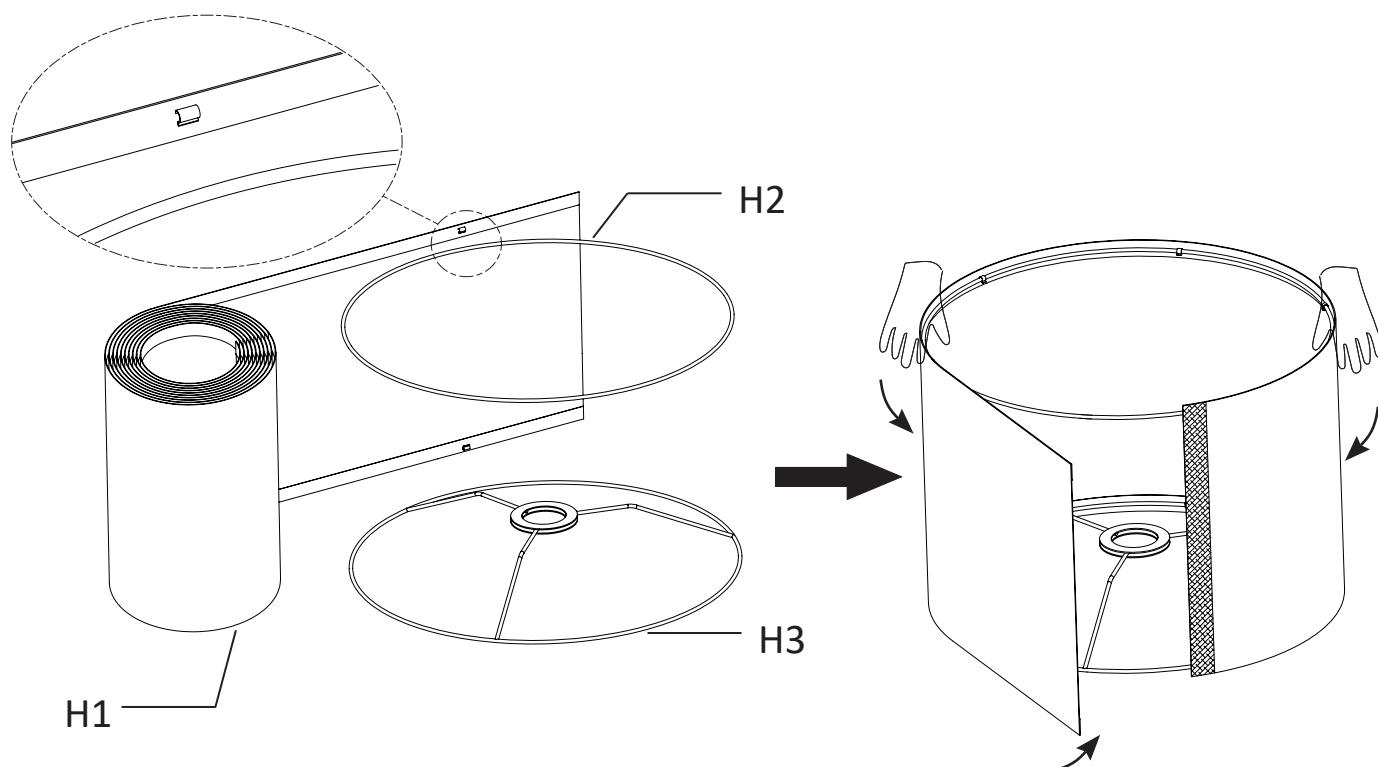


ASSEMBLY (continued)

LAMP ASSEMBLY

1 Assembling the tubes to the base

- Pull the excess power cord through the base (G).
- Tightly screw the tube (F) onto the base (G).
- Tightly screw the tube (E) onto the tube (F).
- Tightly screw the tube (D) onto the tube (E).
- Tightly screw the tube (C) onto the tube (D).
- Tightly screw the tube (B) onto the tube (C).


NOTE: Do not twist the power cord. Be careful to match the thread between the connector and pole. Do not tighten them when the thread is not matched.

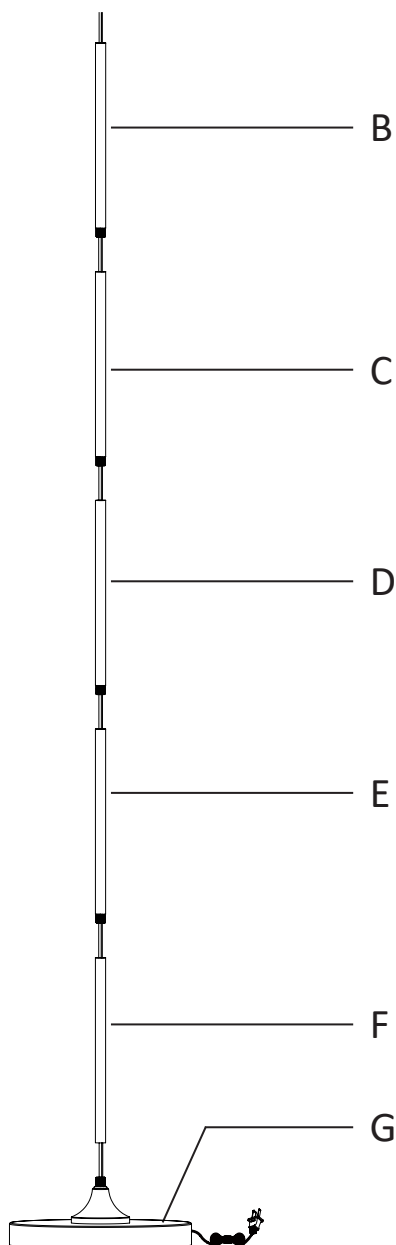

2 Assembling the socket assembly

- Pull the excess power cord through the base (G).
- Tightly screw the socket assembly (A) onto the upper tube (B).

NOTE: Do not twist the power cord. Be careful to match the thread between the connector and pole. Do not tighten them when the thread is not matched.

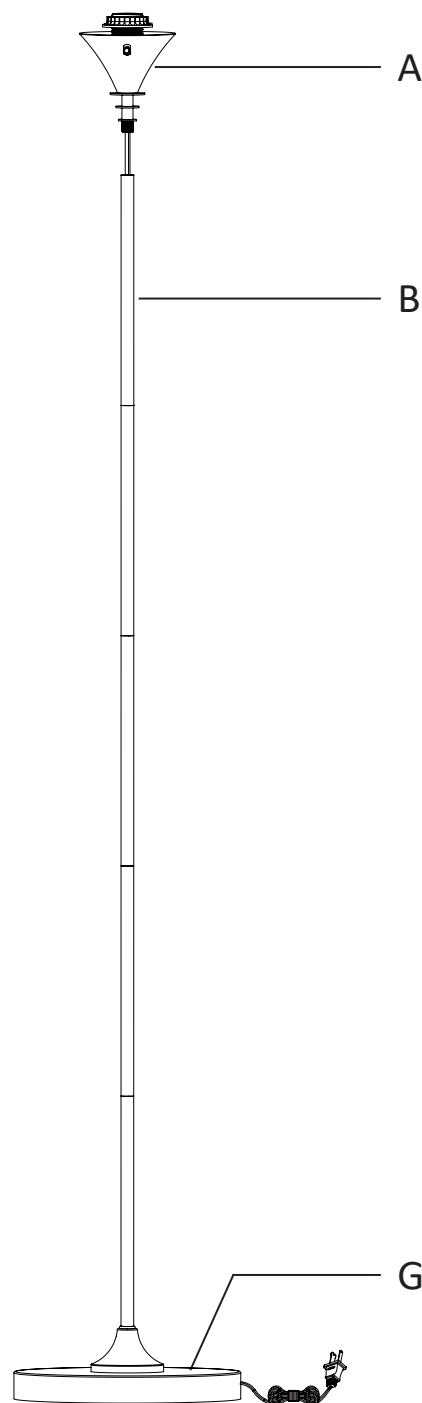


ASSEMBLY (continued)

3 Assembling the shade and bulb

- Unscrew the socket ring (H4) from the socket on the socket assembly (A).
- Place the shade assembly over the socket of the socket assembly (A) and secure the shade assembly with the socket ring (H4).
- Install the light bulb (not provided) into the socket. Use one **MAX 100 W 3-way medium base (E26) type "A"** bulb (recommended).
- Plug into the wall outlet, turn the switch knob clockwise and enjoy.

NOTE: You can also use one **MAX 16 W 3-way medium base (E26) self-ballasted LED bulb**. Do not exceed the recommended wattage.

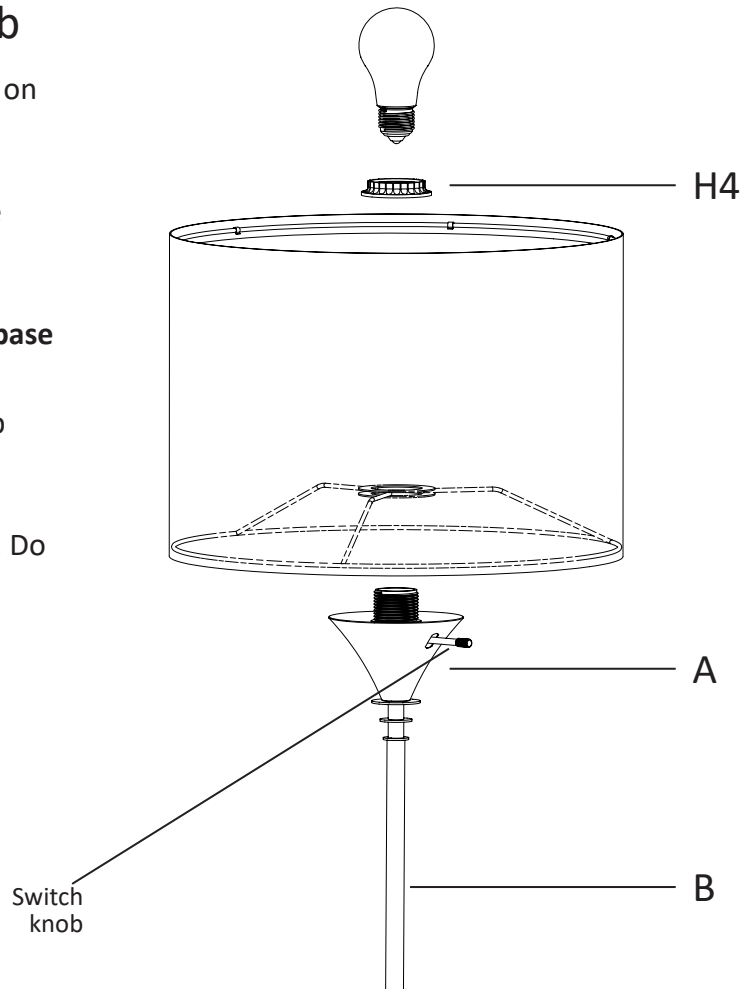

CLEANING

- Do not use any cleaners with chemicals, solvents, or harsh abrasives. Use only a dry, soft cloth to dust or wipe carefully.
- To clean the fixture, pull the plug from the wall outlet. Use a dry or slightly dampened, clean cloth to wipe the exterior surface of the fixture.

TROUBLESHOOTING

- The light does not come on at all:
 - a) Check whether the bulb was burned out.
 - b) Ensure the power supply is turned on.
 - c) Ensure the cord is plugged into an outlet.
 - d) Ensure the circuit breaker is set in the "ON" position.
- Fuse blows or circuit trips when light is turned on.
 - a) Check for crossed wires, ensure wiring is correct.

