
OPERATIONS MANUAL



INSTRUCTION

Assembly &Installation Instructions

Dear Customer:

Thank you for choosing us! We truly appreciate your business and your trust. If you have any questions or encounter any issues, please don't hesitate to reach out. You can contact us, our team is committed to ensuring your complete satisfaction. We also value your feedback, as it helps other customers make informed decisions. If you're happy with your purchase, we'd be grateful if you could take a moment to leave a brief product review on the platform where you made your purchase. Once again, thank you for choosing us. We look forward to serving you again!


Best regards,
The Support Team

Warning: If any special control devices are used with this fixture, follow the instructions carefully to assure full compliance with N.E.C. requirements.If there are any questions, contact a qualified electric contractor.

Warning: California Residents Proposition 65
This product contains lead, a chemical known to the state of California to cause cancer and birth defects or other reproductive harm. Do not place the product in your mouth. Wash your hands after handling this product.

Caution: It is highly recommended to get an electrician to install this light.Please makesure to turn the electricity off at the main circuit breaker before beginning installation. All glass is fragile.Use care when handling glass component(s) and/or lamp(s).

Applicable bulb type:
C35,S45,T8,ST38...(Excluding bulb)

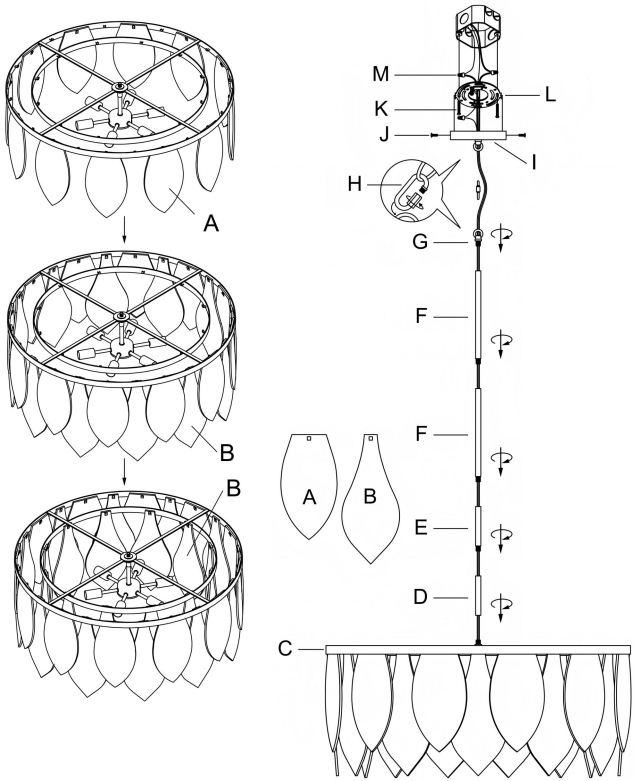

- 1.Unpack all parts from cartons carefully.
- 2.Shut off the power at the circuit breaker before attempting installation.
3. Attach the mounting bracket (L) to the junction box with machine screw (K).
4. Connect the 12" rod (F) and 6" rod (E) and 6" rod (D) together, then attach 12" rod (F) to the Loop Assembly (G) and 6" rod (D) to the fixture body (C).
5. Open the Clocsable link/cap (H) and connect the Canopy Assembly (I) to the Loop Assembly (G) and close the Clocsable link/cap (H)
6. Connect the wire with wire connector (M).
7. Attach the mounting bracket (L) to the canopy unit (I) with screw (J).
8. As shown in the figure, hang wood piece(A) on the outer ring, mounting one piece at every other hook,Then hang wood piece(B) on the empty hooks of the outer ring,Finally hang wood piece (A) onto all hooks of the inner ring.

CAUTION : Risk of fire



Please read all instruction carefully.Before you proceed to install,make sure that the power supply is turned off and remains off until installation is completed.

PARTS INCLUDED

Code	Part Description	QTY
A	Wood piece	12
B	Wood piece	24
C	Fixture body	1
D	6" rod	1
E	6" rod	1
F	12" rod	2
G	Loop Assembly	1
H	Clocsable link/cap	1
I	Canopy Assembly	1
J	Screw	2
K	Machine screw	2
L	Mounting bracket	1
M	Wire connector	3