


ASSEMBLY INSTRUCTIONS STOOL

LOOSELY ATTACH EACH SCREW UNTIL FRAME IS ASSEMBLED THEN TIGHTEN WHEN COMPLETE


1 STEP:1

1) Attach swivel plate(E) to "X" crossing on seat frame by using 4pcs cross head bolts(A), 4pcs lock washers(B) and 4pcs flat washers(C) as shown.

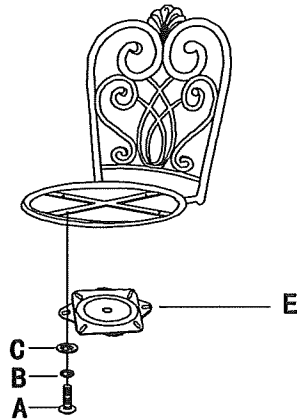


2 STEP:2

2) Attach swivel plate(E) to chair base by using 4pcs cross head bolts(A), 4pcs lock washers(B) and 4pcs flat washers(C) as shown.

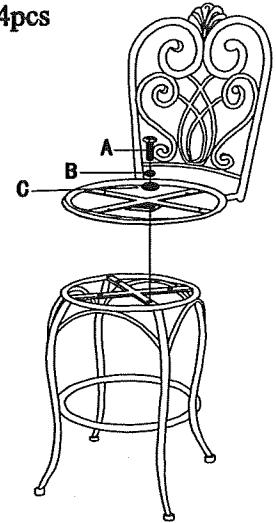


3 STEP:3

3) Attach cushion to seat frame by using 4pcs screws(D).

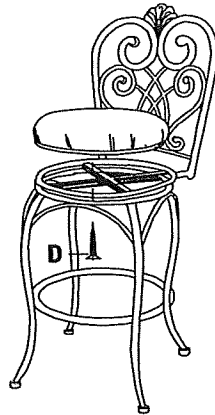

4 STEP:4

4) Assembly is complete.

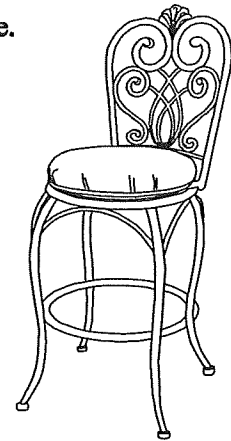

IMPORTANT NOTE:
HARDWARE PACK LOCATON




Hardware Box

HARDWARE PACK
CHECK THAT THE FOLLOWING PARTS ARE IN CARTON

MADE IN CHINA

A



Cross head bolt
1/4"*5/8"L 8PCS

B




Lock washer
1/4" 8 PCS

C



Flat washer
Ø 16mm 8PCS

D



Screw
30mm 4 PCS

E



Swivel plate
1PC