



Sunward®
Bath Whirlpool
K-1164-S1H

Features

- Single-speed whirlpool offers performance and value, with 6 fully adjustable jets.
- Hydromassage flow and direction can be controlled at each jet.
- Built-in heater.
- Generous 6-foot oval shape provides an incredibly spacious bathing area.
- Molded lumbar support and armrests offer extra comfort while bathing.
- End drain.
- Under-mountable
- Smooth backside for easy handling and mounting of drain and overflow.
- 72 " (1829 mm) x 42 " (1067 mm) x 20 " (508 mm)

Material

- ExoCrylic™

Installation

- Drop-in or under-mount.



Codes/Standards

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
UL 1795

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


Available Color/Finishes

Color tiles intended for reference only.



Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	G9	Sandbar

No es necesario cambiar las medidas si se conecta con el desagüe ilustrado. (K-11677 o K-11677M)

Área recomendada para la grifería

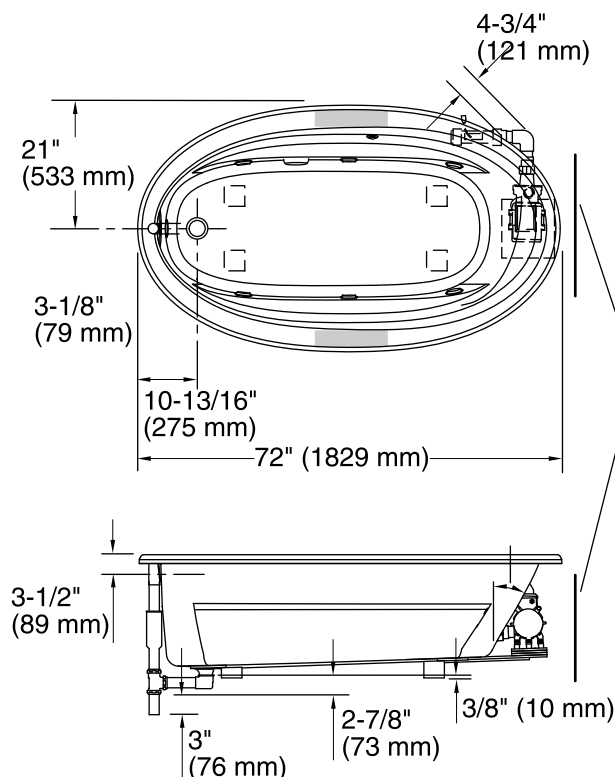

Acceso a la bomba/control
20" (508 mm) W x
15" (381 mm) H Min

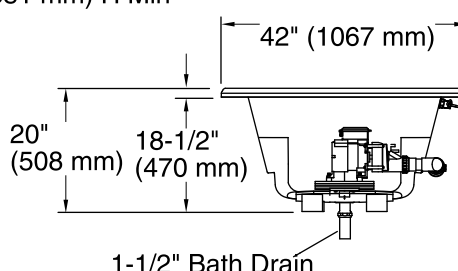

Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

Heater: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation: Drop-in/Undermount

Drain location: Reversible

Basin area, bottom: 55-1/4" x 23-1/2" (1403 mm x 597 mm)

Basin area, top: 64-1/2" x 32" (1638 mm x 813 mm)

Weight: 112 lbs (50.8 kg)

Minimum floor load: 37 lbs/ft² (180.6 kg/m²)

Water capacity: 75 gal (283.9 L)

Template: Drop-in, 1042557-7, not required, not included

Under-mount kit: K-577

Electrical rating: Pump: 120 V, 7.5 A, 60 Hz

Heater: 120 V, 12.5 A, 60 Hz, 1500 W

Notes

Install this product according to the installation guide.

The suction line extends 4-3/4" (121 mm) beyond the edge of the rim. The pump base extends 1/8" (3 mm) beyond the edge of the rim. Modify the framing as needed.