


Shower Door Installation Instructions

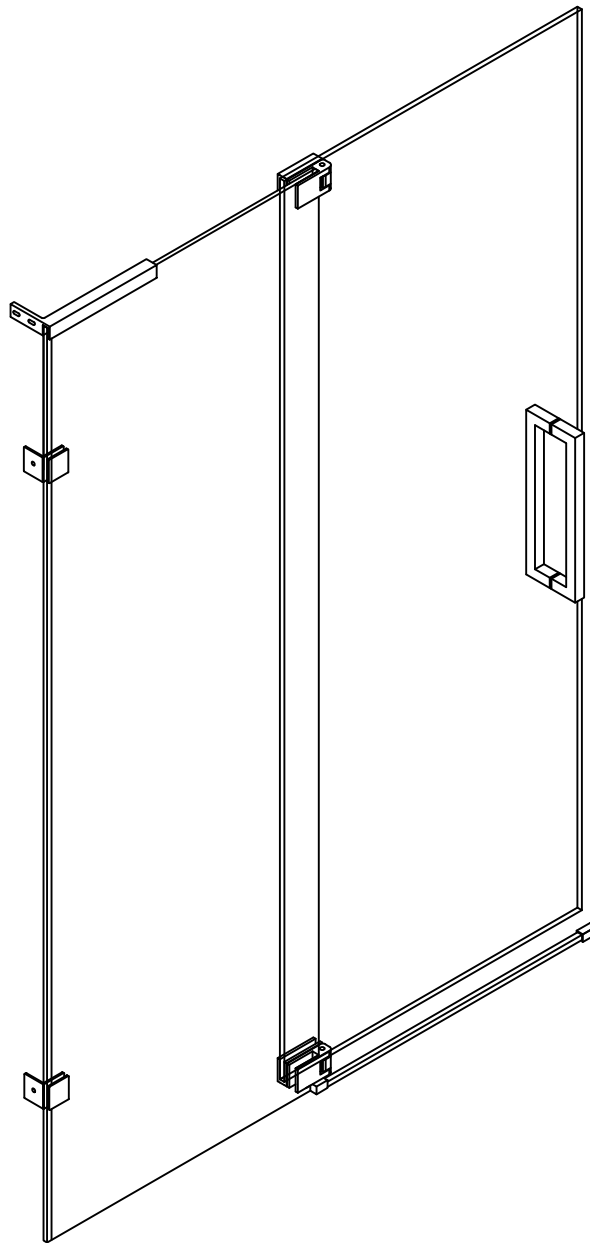

A . Safety Notice

1.Supervision Required: Children, disabled individuals, or persons with limited mobility should never enter the shower enclosure unattended to prevent accidents.

2.Slip Hazard: Exercise caution as the enclosure floor may be slippery due to soap suds. Mind your step when entering/exiting.

3.Door Safety: Open/Close the door carefully to avoid:

Pinching Hazard (keep hands clear of edges)

Glass Collision (ensure clear path before moving door)

B . Important Warning

1.Cleaning Products: Do not use glass detergent, hydrochloric acid, or abrasive cleaners on the shower enclosure, as they may damage stainless steel parts, faucets, hangers and other metal fittings.

2.Drain Care: Never pour acetone, hydrochloric acid, or other corrosive chemicals into the drain to prevent leaks and pipe damage.


3.Avoid Sharp Objects: Do not place knives, cutters, or sharp tools on the tray, as they may cause scratches or permanent damage.

4.No Open Flames: Smoking or using flames inside the shower enclosure is prohibited to prevent fire hazards and material damage.

5.Weight & impact Restrictions: Do not drop heavy or sharp objects on the tray, as this may cause cracks or structural damage.


6.Gentle Handling: Avoid rubbing the tray with hard objects or striking the shower walls, as this may lead to scratches or breakage.

7.Pulley Maintenance: if the door pulley is not moving smoothly, inspect for a. Loose screws, misaligned glass, or damaged pulley wheels; b. loosened or unstable frame


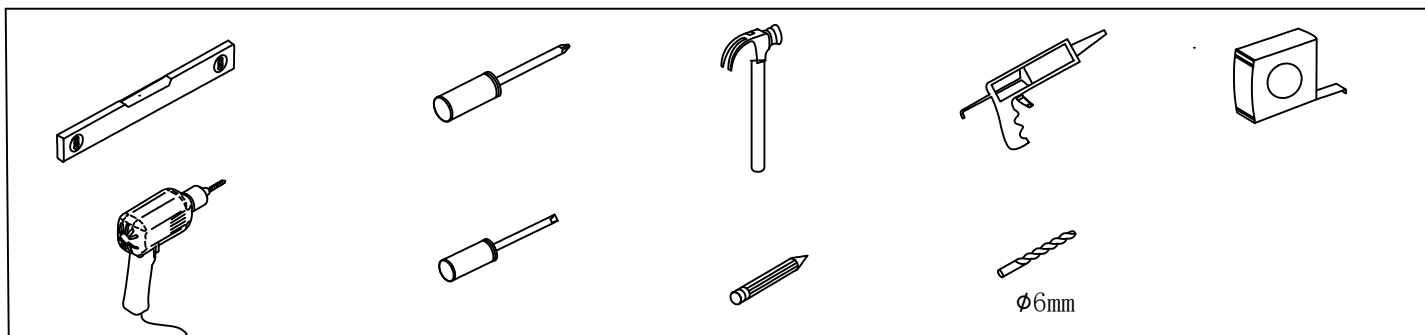


Installation Tools

B.Product Contents

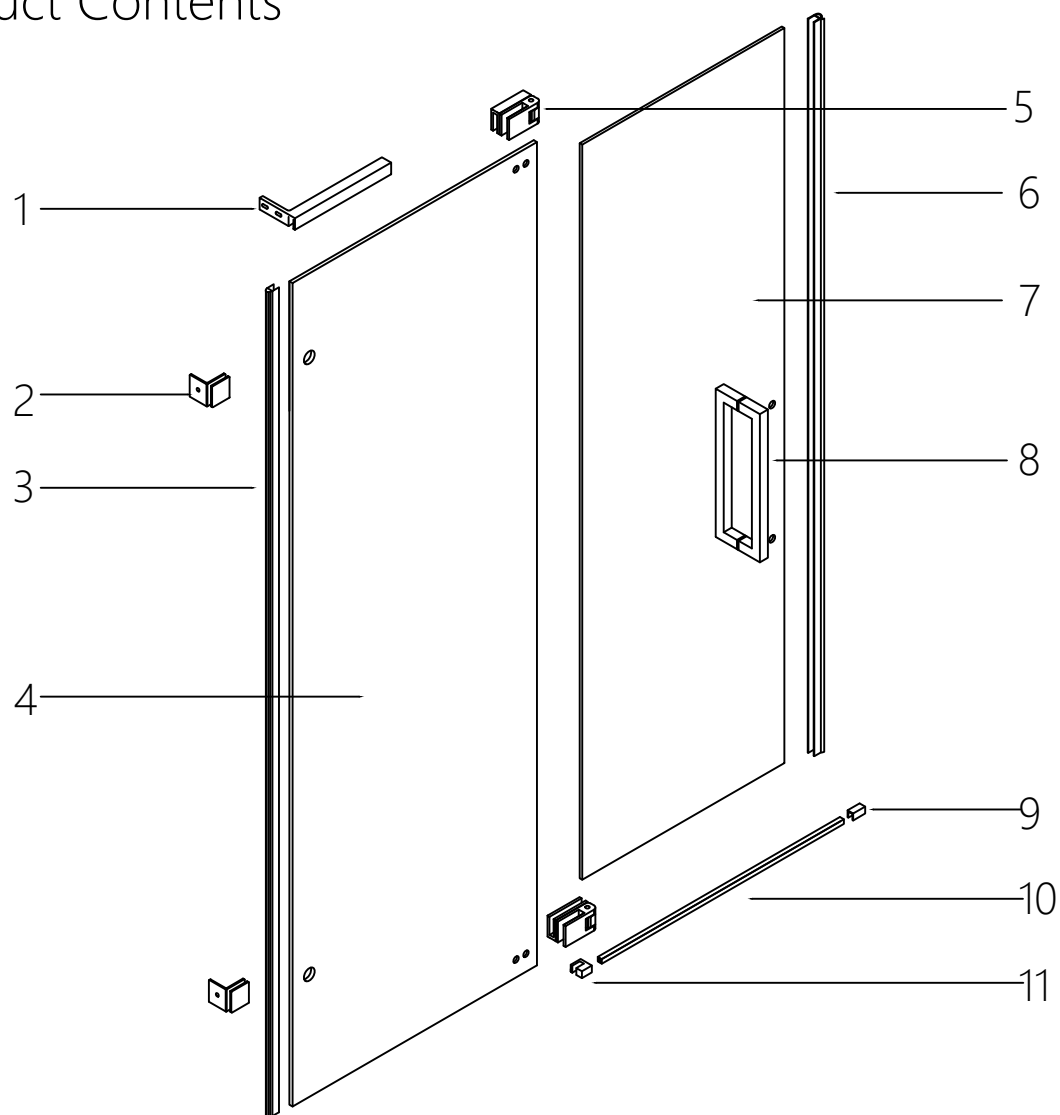

NO.	Description	QTY	NO.	Description	QTY
1	Support rod	2	7	Door glass	1
2	Clamp	2	8	Door Handle	1
3	Rubber strip on fixed glass	1	9	Screw cover	1
4	Fixed glass	1	10	Stainless steel threshold	1
5	Hinge	2	11	Threshold clip	2
6	Rubber strip on door glass	1			

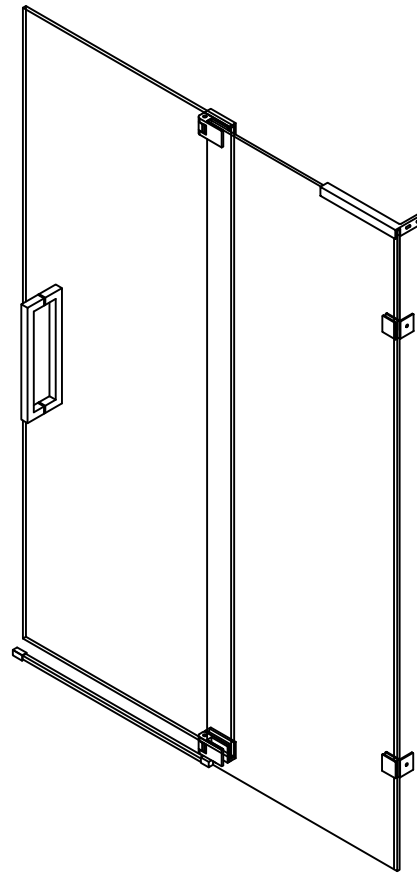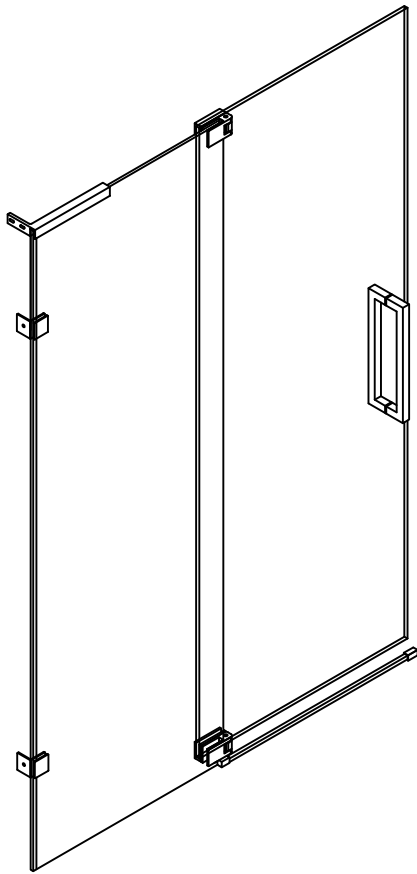

NOTE: This model is reversible for left or right-opening installation. This manual will show the H01+side panel right-opening door installation as an example throughout. For a left-opening door installation, simply begin on the opposite wall and reverse the orientation of the parts as necessary.

IMPORTANT INFORMATION REGARDING THE INSTALLATION OF THIS SHOWER DOOR


- 1** Guide Rail Brackets must be firmly attached to the wall. All of the guide rail bracket set screws must be tightened.
- 2** Lower Roller Wheels must be positioned and secured making contact with the Upper Guide Rail. Apply thread lock to the roller bolts during installation.
- 3** Seal must be installed on the closing edge of the door glass
- 4** The Guide Block must be screwed to the threshold and installed square to the door glass. Installing the guide block crooked may damage the bottom edge of the door glass and lead to breakage.







This product is heavy and will require two people to install.


Technical drawing of a rectangular panel, labeled P1. The panel is shown in a perspective view. It features two L-shaped mounting brackets on the left side, one near the top and one near the bottom. Each bracket has two screws. There are also two screws on the top right corner and two on the bottom right corner. The panel is labeled P1 in the bottom right corner.

P1





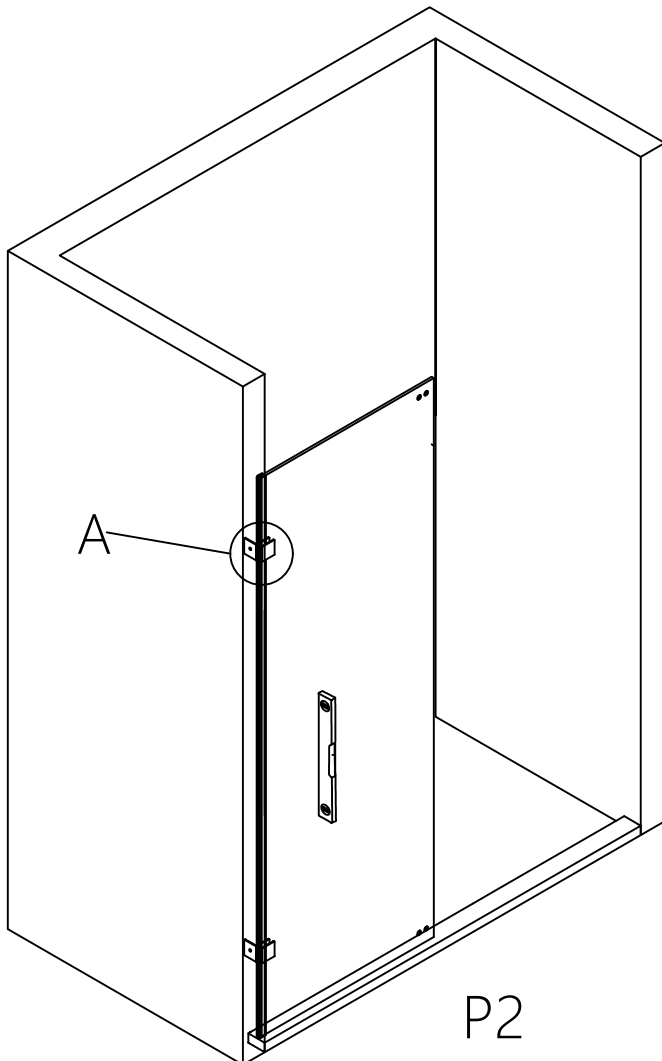


A




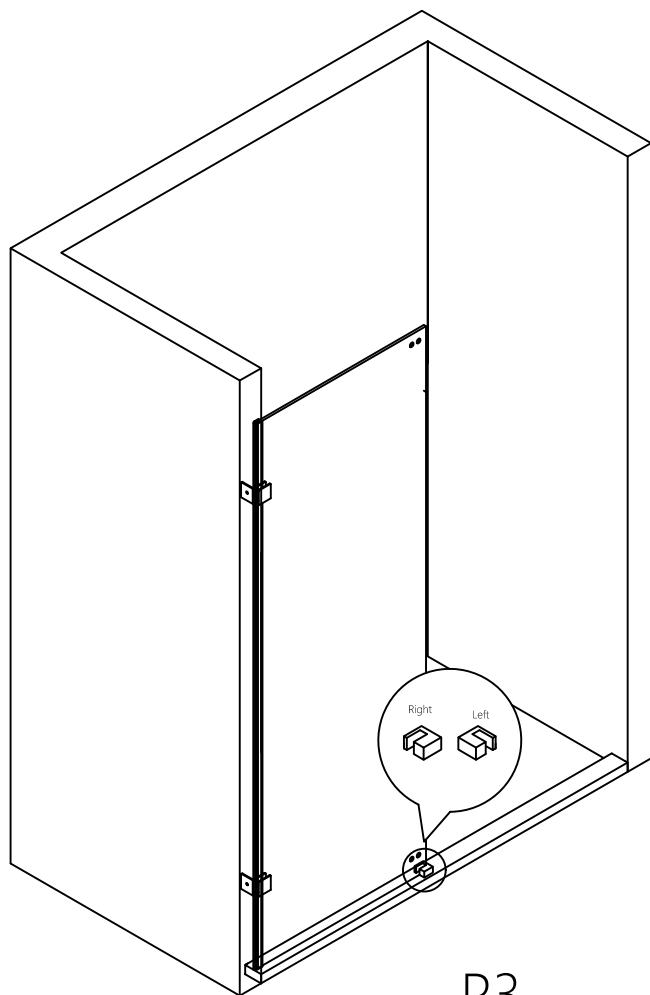

3. Fix the threshold clip on the glass (choose the correct clip)

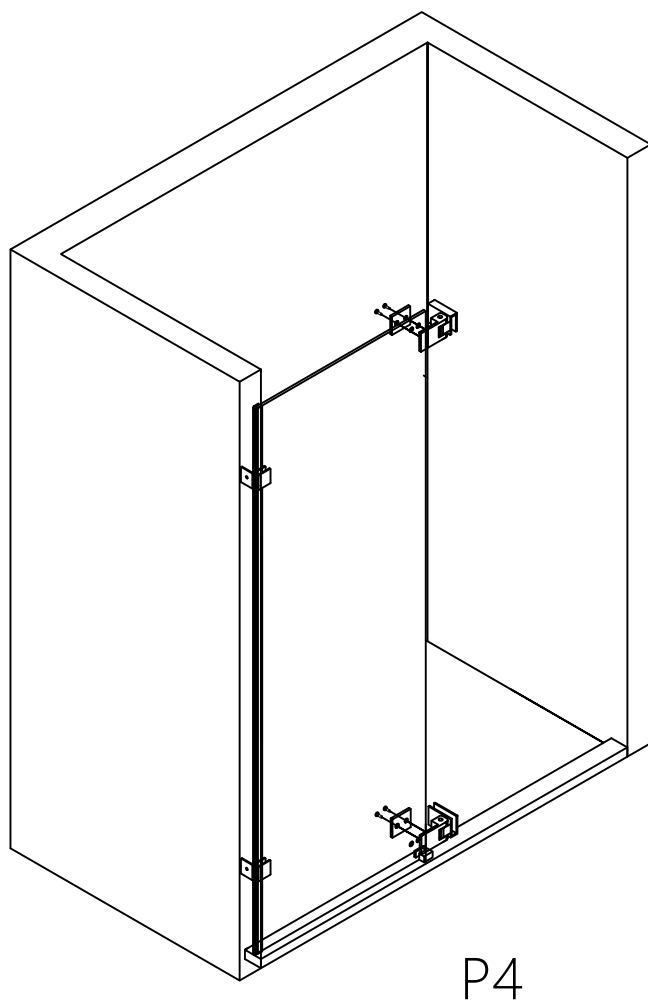


4. Fix the hinge.

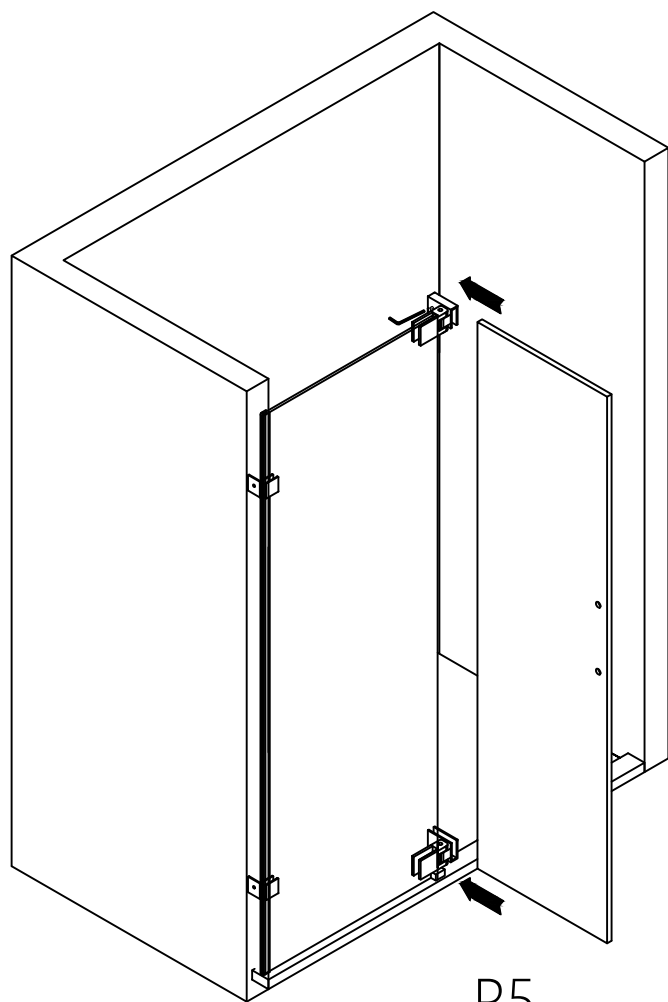


5. Install the door glass. First, insert the glass into the hinge, then tighten the screws on the back of the hinge.

Note: Two people are required to operate simultaneously for this step.

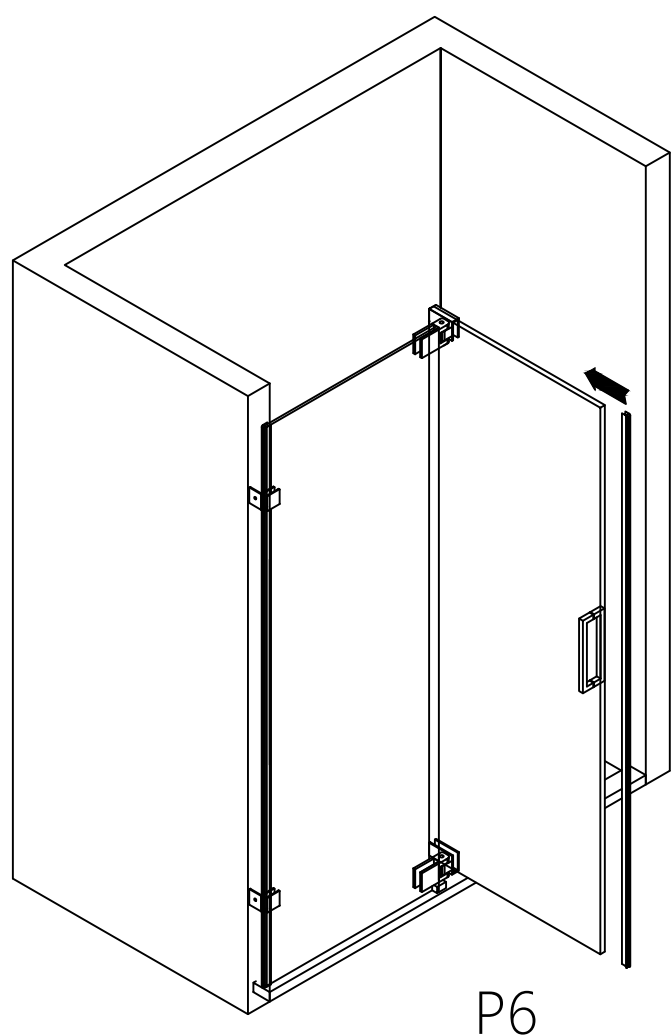


6. Install the handle and the rubber strip #6 on door glass, and keep the door glass sealed with the wall.

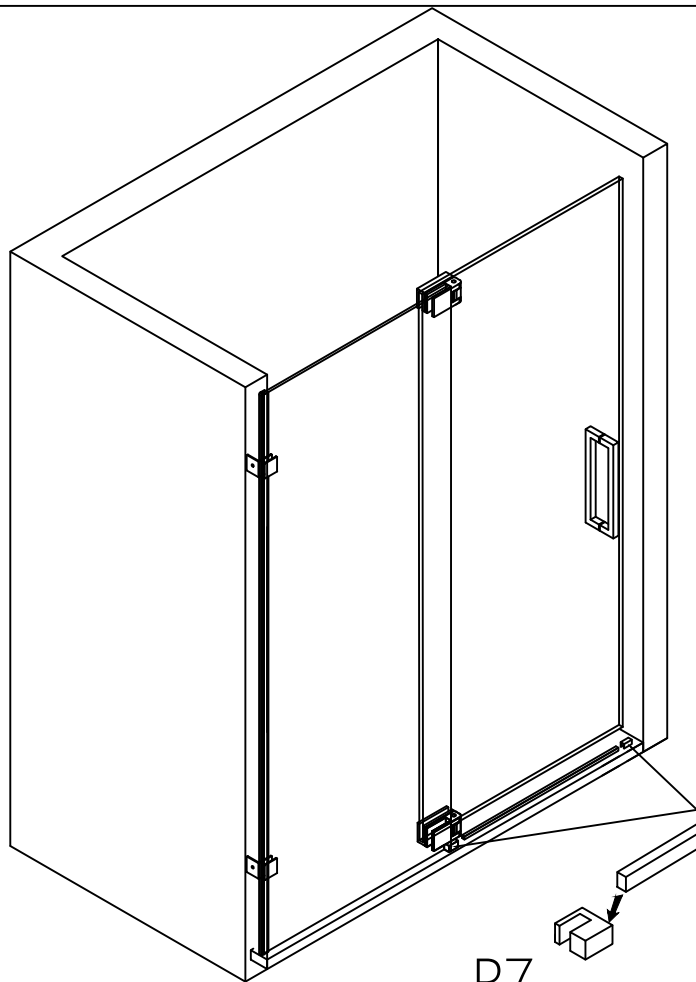

7. Install the threshold and fix the clip#11 finally .

P7

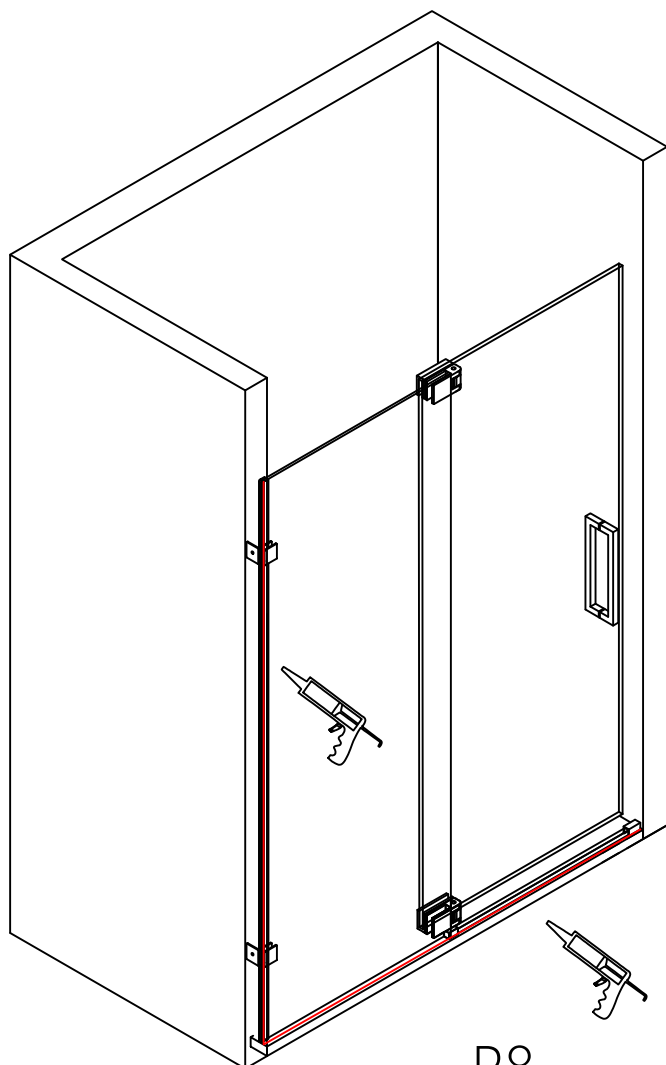

8. Last but not least, apply silicone sealant to the entire interior perimeter where the wall profile meets the wall and along the threshold.

P8

Maintenance of Shower Enclosure

1. Cleaning

Please use a soft, dry cloth to clean the shower enclosure and shower tray. If there is minor dirt, please use a soft cloth or sponge dampened in a mild detergent to clean; to remove stubborn dirt, use alcohol.

When cleaning with bath detergent, do follow its instructions and use correctly. Incorrect using methods will result in bad effects on human body and is easy to make the product appear some bad situations.

Do not use following items to clean: the acidic, alkaline solvents, drugs (such as hydrochloric acid), acetone thinners and other solvents and scouring powder, otherwise they will result in bad effects on human body and is easy to make the product appear some bad situations.

2. Usage and maintenance of shower room roller

A. There are two kinds of shower sliding doors: slider and roller

B. Attention while using:

- 1) Avoid over striking the movable door, which may cause the door loose.
- 2) Clean rails, wheels, sliders regularly and add lubricant (oil or lubricating wax);
- 3) Adjusting the screws of sliders on a regular basis to ensure the sliders' effective carrying and smooth sliding to the movable doors.

3. Maintenance of Tempered Glass

- 1). Do not use sharp objects against the surface to avoid damage;
- 2). Do not wipe the glass surface with corrosive liquids to avoid damaging the glossy surface;
- 3). Do not wipe the surface with a rough material to avoid scratches;

4. Maintenance of Stainless Steel Frame

A. Electrostatic painting products (referring to the white, bone, blue, yellow, red, purple and other solid spray type)

- 1) Prevent direct sunlight and prolonged exposure under the sunlight which will cause color fading.
- 2) Do not wipe with corrosive liquids or materials;
- 3) Do not use rough material (including toothpaste) for surface cleaning;
- 4) Do not scratch the surface with sharp objects.

B. Oxidation coloring products (such as gold, silver, matt silver, brush nickel silver)

Comparing with electrostatic painting products, oxidation color is not easy to fade, but due to its poorer hardness, please do not wipe with rough materials, especially sharp objects to scratch.

For stain on surface, please wipe with neutral cleanser.

5. Usage and maintenance of Acrylic shower tray.

- 1) Do not use sharp objects against the surface to avoid damage;
- 2) Do not wipe the acrylic surface with corrosive liquids to avoid damaging the glossy surface;
- 3) Do not wipe the surface with rough materials to avoid scratches.