



Assembly & Installation Instructions



turn off the power

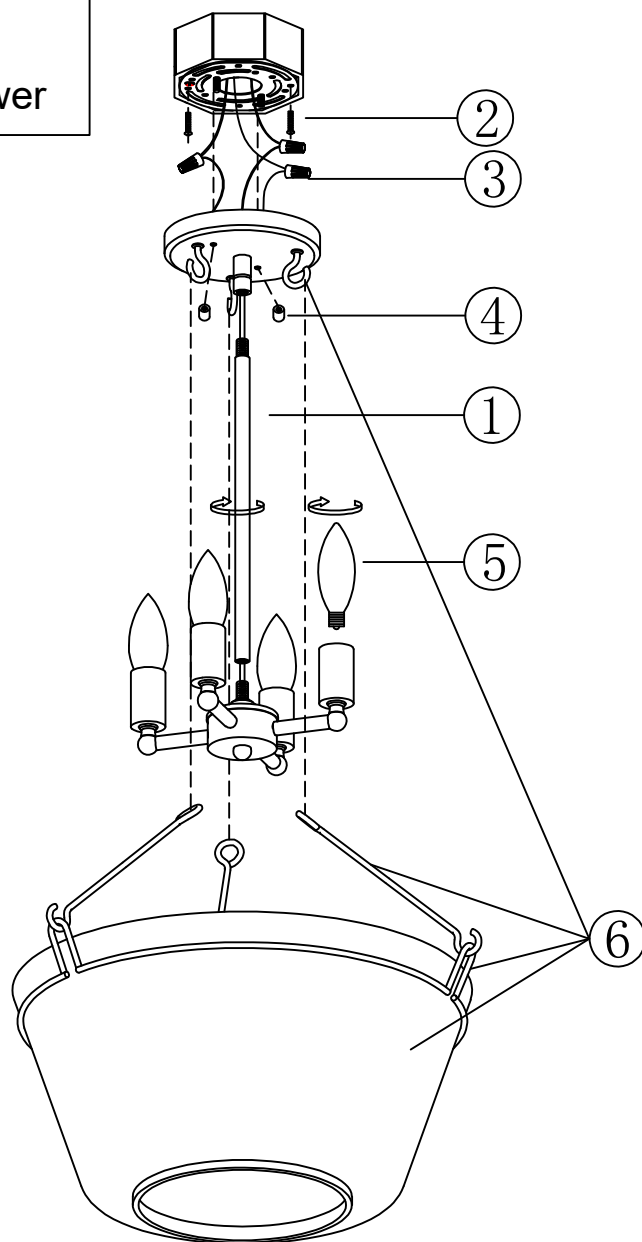

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1: Thread wire

Thread the main wire through the rod and ceiling canopy, then twist it tight to secure.

Step 2: Mark bracket

Remove the mounting bracket from the fixture and secure it to the junction box with screws.

Step 3: Connect wires

Use wire nuts to connect the fixture wires to the house wiring as follows:

-BLACK wire to LIVE wire

-WHITE wire to NEUTRAL wire

-GROUND wire to GROUND terminal, connect to the mounting bracket using green grounding screws

Caution: Ensure no wires are exposed during the wiring.

Step 4: Secure ceiling canopy

Secure the ceiling canopy to the mounting bracket using round nuts.

Step 5: Install lamp

Install the bulb (Bulb not included).

Step 6: Attach shade

Support the glass shade with an iron wire coil, then use one end of the wire with hooks to hook onto the iron wire coil, and the other end to hang on the iron hook on the ceiling canopy.

Step 7: Test bulb

Turn on the power and check if the bulb is working properly.

Installation is complete.