

# INSTALLATION INSTRUCTIONS

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. To begin assembly of your fixture, first slip stem (1) with loop along with wire and thread onto threaded tube (2) and tighten.

### HANGING THE FIXTURE (Fig. 2)

4. Thread all thread (D) into collar loop (F) until snug.
5. Thread the other end of all thread (D) into crossbar (A). Note: The length of all thread (D) into crossbar (A) may adjusted if necessary.
6. Use lock washer (B) and hex nut (E) to secure all thread (D) to cross bar (A).
7. Take cross bar assembly and mount to junction box (JB) "not provided" with 8-32 mounting screws. The side of crossbar (A) marked with "GND" must be face out.
8. Determined the desired hanging height and discard excess chain. Note: 2x quick links are provided and must be attach to both ends of chain (I).
9. Open quick link (G) and connect to fixture loop (K). Then thread quick link (G) and close.
10. Slip canopy (H) and collar ring (J) over chain (I) and adjust height and allow them to rest on fixture body.
11. Attach the other quick link (G) to ceiling loop (F) then close to secure.
12. Carefully lace fixture's wire through chain (I).
13. Feed fixture wires through ceiling loop (F) and crossbar assembly.

### CONNECTING THE WIRE (Fig. 3)

14. Connect the electrical wire as shown in Fig. 3, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixtures ground wire to it. Otherwise connect fixture ground wire directly to crossbar (A) using green screw provided.
15. Tuck wire connections neatly into junction box (JB).
16. Raise canopy over collar loop (F) and secure with collar ring (J).

### FINISHING THE FIXTURE (Fig. 1)


17. Install 9x E12 base light bulbs (LB) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**  
**(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. You can now turn the power ON and test the fixture.


**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**FIG. 1**

Set# A-012  
-Crossbar  
-Ground screw  
-Mounting Screw \*2

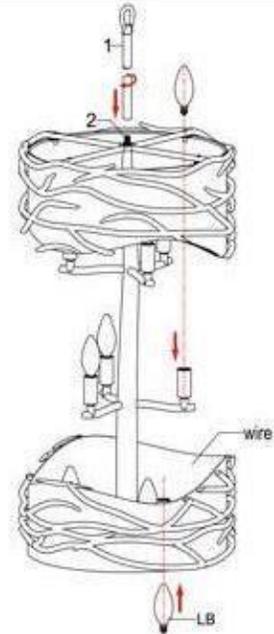

**FIG. 2**

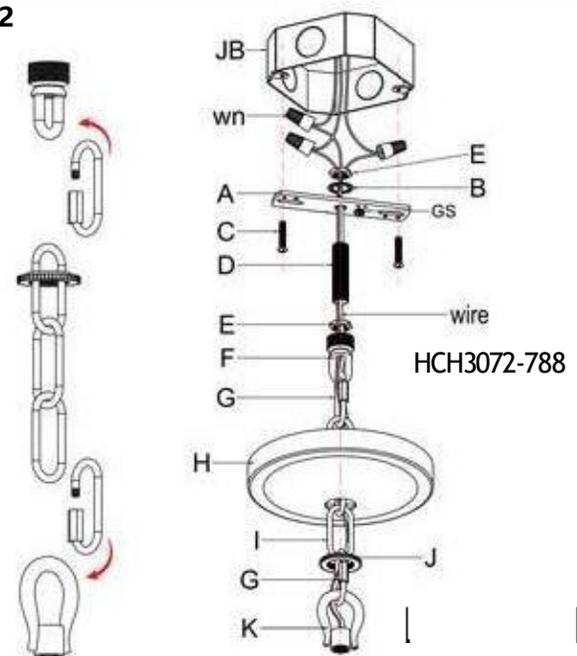

**Fig. 3**

FIXTURE WIRES  
Black or  
Smooth

FIXTURE WIRES  
White or  
Ribbed

FIXTURE WIRES  
Bare  
Copper  
(Ground)

HOUSE WIRES  
Black  
(Hot)

HOUSE WIRES  
White  
(Neutral)

HOUSE WIRES  
Green  
(Ground)



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

