

# Instructions


## ⚠ WARNING

- Check for electric, gas, & plumbing lines before drilling or consult a professional.
- Turn off your electricity at the circuit breaker or main fuse box before installation. Do not restore power to the line until the light has been fully installed.
- Do not use with bulbs exceeding the recommended wattage.
- Always switch off the electricity supply and allow bulbs to cool for 10 minutes before changing it.
- Do not look directly at lit bulb.

## ASSEMBLY

It is recommended to use two or more persons during the assembly process.

1. Connect the Arc shaped runway (K) with Fixings (E) and secure it with M4 screws. Form a circle
2. Fix the Lamp Head Tube (A) to the Junction Box (B) with a nut
3. Use terminal blocks to connect the power cord to the main line, paying attention to distinguishing the positive and negative poles
4. Twist the Connecting pipe (G) to the junction box (B)
5. Connect Wirrop (F) to Fixings (E) at one point and Canopy (M) at the other end. Adjust the balance properly
6. Connect Chain (D) to Canopy (M) and select the desired length
7. Fix the installation bracket (C) to the junction box
8. Connect the power cord with Canopy (H) and tighten them using Canopy Nut (J)
9. twist in the E26 bulb MAX60W
10. After installation is completed, turn on the power switch and test whether the lighting fixtures are on. Due to the large size of the lamp body and the relatively complex installation, it is recommended to have a professional electrician complete it!

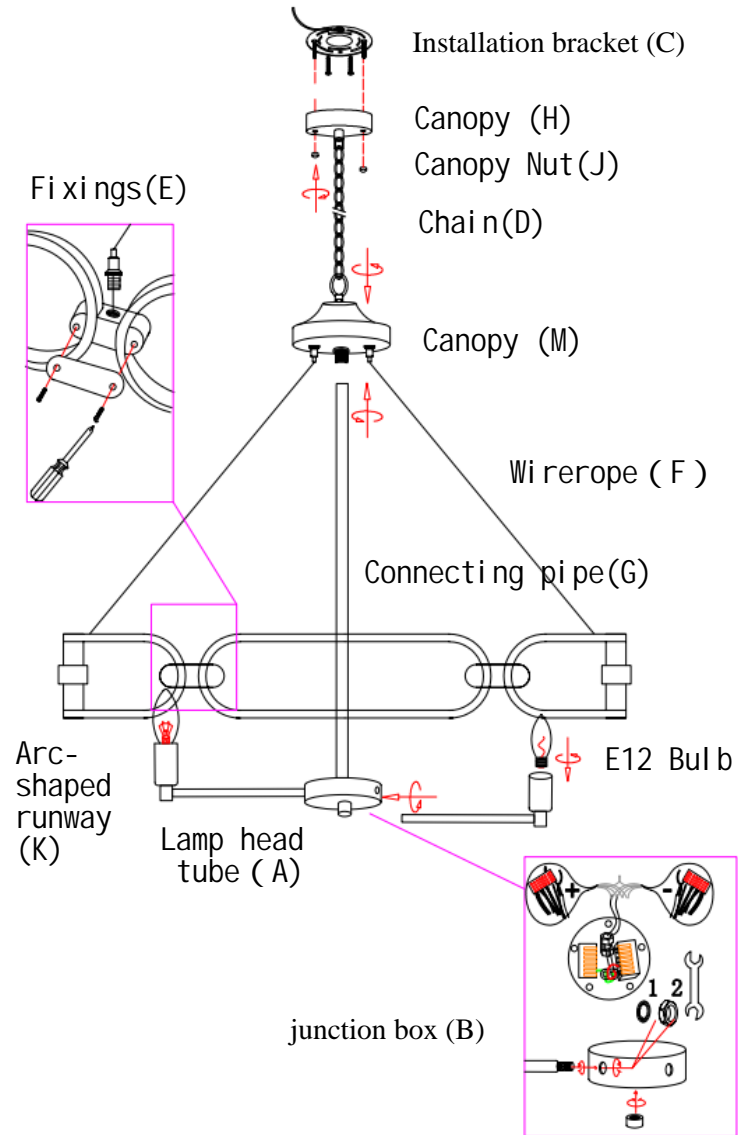

Just Scan the Below Code for Installation Video



289B

d1		x 3
d2		x 2

E12 Socket Max  
.60W Bulbs  
(not included)

# Instructions


## ⚠ WARNING

- Check for electric, gas, & plumbing lines before drilling or consult a professional.
- Turn off your electricity at the circuit breaker or main fuse box before installation. Do not restore power to the line until the light has been fully installed.
- Do not use with bulbs exceeding the recommended wattage.
- Always switch off the electricity supply and allow bulbs to cool for 10 minutes before changing it.
- Do not look directly at lit bulb.


## ASSEMBLY

It is recommended to use two or more persons during the assembly process.

1. Connect the Arc shaped runway (K) with Fixings (E) and secure it with M4 screws. Form a circle
2. Fix the Lamp Head Tube (A) to the Junction Box (B) with a nut
3. Use terminal blocks to connect the power cord to the main line, paying attention to distinguishing the positive and negative poles
4. Twist the Connecting pipe (G) to the junction box (B)
5. Connect Wirrop (F) to Fixings (E) at one point and Canopy (M) at the other end. Adjust the balance properly
6. Connect Chain (D) to Canopy (M) and select the desired length
7. Fix the installation bracket (C) to the junction box
8. Connect the power cord with Canopy (H) and tighten them using Canopy Nut (J)
9. twist in the E26 bulb MAX60W
10. After installation is completed, turn on the power switch and test whether the lighting fixtures are on. Due to the large size of the lamp body and the relatively complex installation, it is recommended to have a professional electrician complete it!

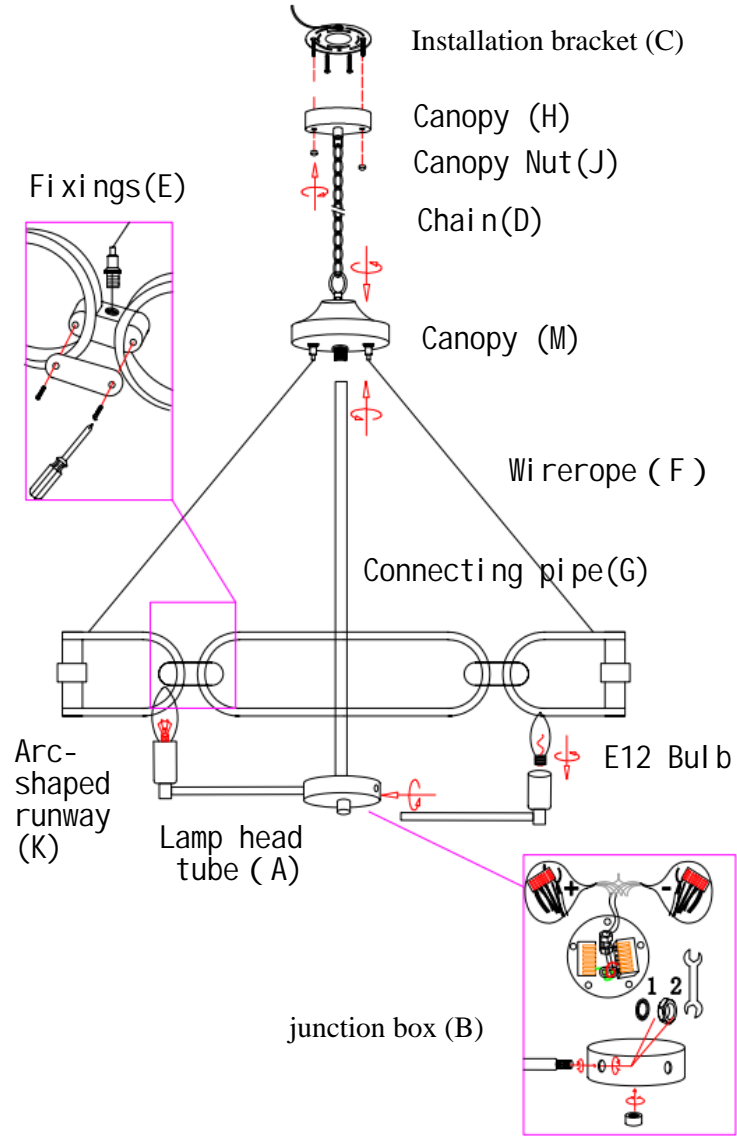

Just Scan the Below Code for Installation Video



289B

d1		x 3
d2		x 2

E12 Socket Max  
.60W Bulbs  
(not included)